



NOVIK
NEO

www.novikneo.com

PRODUCT LINE UP

PROFESSIONAL AUDIO EQUIPMENT

NOVIK NEO

INDEX



2	ULTRASLIM CONSOLE	40	MULTI-PURPOSE POWERED LOUDSPEAKER
8	MULTI-CHANNEL MIXER USB	42	UHF PROF. WIRELESS MIC SYSTEM
12	POWERED MIXER	44	VHF WIRELESS MICROPHONE SYSTEM
14	USB POWERED MIXER	47	CONDENSER GOOSENECK MICROPHONE
16	POWERED MIXER BT	48	PROFESSIONAL DYNAMIC MICROPHONE
18	NOVOD SERIES	50	CONCERT MKII SERIES
20	NOVO SERIES	52	MEGAPHONES
22	LIRIC SERIES	54	WOOFERS
24	IN-WALL / CEILING SPEAKERS	56	DRIVERS
26	EVO D 450 BT AMPLIFIED LOUDSPEAKER	57	HORNS & CABINET HARDWARE
27	EVO SERIES AMPLIFIED LOUDSPEAKER	58	SYSTEM EXAMPLES
32	EVO SERIES PASSIVE LOUDSPEAKER	59	PORTABLE AUDIO SYSTEM
34	STREETSOUND V		
36	EVO 410 HANDY		
38	ROLLING SOUND SERIES		



INTRODUCTION

- ▶ Today, NOVIK is a leader brand in professional and commercial audio in America.
- ▶ Since its beginnings in Brazil during the year 1974, NOVIK began a long way of quality and reliability. It was during the 90's that it turned into the major manufacturer of speakers in Latin America, continuously focusing in accompanying its products with the most advanced technology and performance. A few years ago, NOVIK has become essential to create solutions for all areas of professional audio, supported by the high quality standards, investigation and development that characterizes the brand.
- ▶ At present, NOVIK has developed new equipment lines that extend its product range beyond the imaginable, characterized by its functionality and exclusive designs. The new line of ultra slim powered consoles, class D amplifiers, portable sound systems and an endless number of original products provide solutions with the highest technology to the user. Through the years, NOVIK installed in America the concept of quality and confidence in professional and commercial audio products, today, once again, it prints with investigation, development, functionality and technology these new products on the pages
- ▶ of Professional Audio of America.

MIXER NVK 1602FX

**16 CHANNEL
ULTRA-SLIM MIXER**

INSERT

It is usually used for dynamic processors, the signal is bridged with the connector completely inserted, sending and receiving the signal simultaneously by the same line.

12 CHANNELS

With pre-amplifiers of Mic and Phantom Power (+48V)

4 CHANNELS

Stereo



- NVK 1602FX combines multiple microphone and line inputs, 24Bit multi-FX processor and USB / SD MP3 player.
- Multipurpose mixer with Ultra-Slim and lightweight innovative design, enabling great convenience in operation, installation in small places and comfortable transportation.



MAIN FEATURES

- Built in MP3 player
- DSP with 99 internal effects
- 12 channels with pre-amplifiers of Mic Phantom Power (+48V)
- 4 stereo channels
- XLR and 1/4" metal Jack connector socket
- 8 Standard Connector 1/4" TRS type to insert
- 3 Bands Equalizer Per Channel
- Graphic Equalizer of 7 bands for the Master
- Compatible with USB and SD memories
- Auxiliary Monitor Sending / effects (pre/post-fader)
- Comfortable faders for a balanced mix
- Output to monitor through earphones with PFL function
- PFL function per mix channel
- Peak LEDs in all the channels
- Bluetooth® Connectivity



MP3 INPUT

Through a data store device with USB or SD card connection, it can be reproduced the audio files in the console

24-BIT MULTI-FX PROCESSOR

DSP with 99 internal effects




00 Small Hall	36 Reverse	82 Flanger & Reverb
03 Mid Hall	40 Early Refl	84 Phaser & Reverb
06 Big Hall	44 Ambience	86 Pitch & Reverb
09 Church	48 Stadium	88 Delay & Reverb
10 Small Room	49 Ambience Fx	90 Delay & Gated
13 Mid Room	50 Delay	91 Delay & Reverse
16 Big Room	59 Echo	92 Delay & Chorus
19 Chapel	60 Chorus	94 Delay & Flanger
20 Plate	66 Flanger	96 Delay & Phaser
27 Spring	70 Phaser	98 Delay & Pitch
30 Gated Rev	74 Pitch Shift	

Cod. 6000415



ULTRA SLIM MIXER

► GRAPHIC EQ

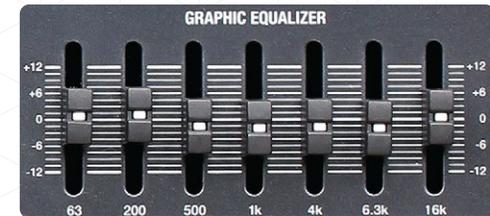

TECHNICAL SPECIFICATIONS

Microphone Inputs	XLR type balanced	Max. Main Output Level	28dBu (stereo) / 22dBu (simple channel)
Microphone TRIM Gain Range	25dB (50mV IN @ 1kHz)	Earphone Output	PLUG type ¼" STEREO
Line/ Stereo Input	¼" TRS type balanced/unbalanced	Max. Earphones Output Level	22dBu
Line TRIM Gain Range	20dB (700mV IN @ 1 kHz)	MP3 Player	
S/N Ratio	111dB	Compatible Audio Formats	MP3
Distortion (THD+N)	0.05% measured with weighting curve A	DSP	
Frequency Response	20Hz- 20kHz ±1.2dB	Converter	24 bit Sygma-Delta
Auxiliary Output	PLUG type¼" TS unbalanced	Sample Frequency	48 kHz
Main Outputs	PLUG type¼" TRS balanced	Power Supply Input	2 x 18V AC ~ 700mA

PACKING INFO

MASTER DIMENSIONS: 682x475x355 mm
24.4x18x14 in

GROSS WEIGHT: 30.5 kg
67.24 lb

MASTER PIECES: 5 PCS

► Specifications subject to change without notice.

► 16 CHANNEL
► ULTRA-SLIM MIXER

MIXER NVK 1202FX

12 CHANNEL

ULTRA-SLIM MIXER

INSERT

8 CHANNELS

4 CHANNELS

It is usually used for dynamic processors, the signal is bridged with the connector completely inserted, sending and receiving the signal simultaneously by the same line.

With pre-amplifiers of Mic and Phantom Power (+48V)

Stereo



NVK 1202FX can mix 12 stereo and mic channels, 24Bit multi-FX processor and USB / SD MP3 player.

It's a multipurpose mixer with Ultra-Slim and lightweight innovative design, enabling great convenience in operation, installation in small places and comfortable transportation.



MAIN FEATURES

- Built in MP3 player
- DSP with 99 internal effects
- 8 channels with pre-amplifiers of Mic and Phantom Power (+48V)
- 4 Stereo channels
- 4 Standard Connector 1/4" TRS type to insert
- 3 Bands Equalizer per channel
- Graphic Equalizer of 7 bands for the Master
- Compatible with USB and SD memories
- Auxiliary Monitor Sending / effects (pre/post-fader)
- Comfortable faders for a balanced mix
- Output to monitor through earphones with PFL function
- PFL Function per mix channel
- Peak LEDs in all the channels
- Bluetooth® Connectivity



MP3 INPUT

Through a data store device with USB or SD card connection, it can be reproduced the audio files in the console

24-BIT MULTI-FX PROCESSOR

DSP with 99 internal effects



00 Small Hall	36 Reverse	82 Flanger & Reverb
03 Mid Hall	40 Early Refl	84 Phaser & Reverb
06 Big Hall	44 Ambience	86 Pitch & Reverb
09 Church	48 Stadium	88 Delay & Reverb
10 Small Room	49 Ambience Fx	90 Delay & Gated
13 Mid Room	50 Delay	91 Delay & Reverse
16 Big Room	59 Echo	92 Delay & Chorus
19 Chapel	60 Chorus	94 Delay & Flanger
20 Plate	66 Flanger	96 Delay & Phaser
27 Spring	70 Phaser	98 Delay & Pitch
30 Gated Rev	74 Pitch Shift	




Cod. 6000414

ULTRA SLIM MIXER



▶ GRAPHIC EQ

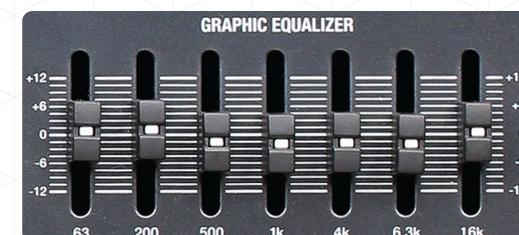

TECHNICAL SPECIFICATIONS

Microphone Inputs	XLR type balanced	Max. Main Output Level	28dBu (stereo) / 22dBu (simple channel)
Microphone TRIM Gain Range	25dB (50mV IN @ 1kHz)	Earphone Output	PLUG type ¼" STEREO
Line/ Stereo Input	¼" TRS type balanced/unbalanced	Max. Earphones Output Level	22dBu
Line TRIM Gain Range	20dB (700mV IN @ 1 kHz)	MP3 Player	
S/N Ratio	111dB	Compatible Audio Formats	MP3
Distortion (THD+N)	0.05% measured with weighting curve A	DSP	
Frequency Response	20Hz- 20kHz ±1.2dB	Converter	24 bit Sygma-Delta
Auxiliary Output	PLUG type¼" TS unbalanced	Sample Frequency	48 kHz
Main Outputs	PLUG type¼" TRS balanced	Power Supply Input	2 x 18V AC ~ 700mA

PACKING INFO

MASTER DIMENSIONS:	515x475x355 mm 20.3x18x14 in
GROSS WEIGHT:	24.5 kg 54.01 lb
MASTER PIECES:	5 PCS

▶ Specifications subject to change without notice.

▶ 12 CHANNEL
▶ ULTRA-SLIM MIXER

05

MIXER NVK 802FX

8 CHANNEL
ULTRA-SLIM MIXER

INSERT

5 CHANNELS

3 CHANNELS

It is usually used for dynamic processors, the signal is bridged with the connector completely inserted, sending and receiving the signal simultaneously by the same line.

With pre-amplifiers of Mic and Phantom Power (+48V)

Stereo

Bluetooth®



- ▶ NVK 802FX is a multipurpose mixer with Ultra-Slim and lightweight innovative design, can mix stereo and mic channels, 24Bit multi-FX processor and USB / SD MP3 player.
- ▶ Allows easy transportation and installation in small places.



▶ FRONT VIEW

MAIN FEATURES

- Built in MP3 player
- DSP with 99 internal effects
- 5 channels with pre-amplifiers of Mic and Phantom Power (+48V)
- 3 Stereo channels
- 3 Bands Equalizer per channel
- Graphic Equalizer of 7 bands for the Master
- Compatible with USB and SD memories
- Auxiliary Monitor Sending / effects (pre/post-fader)
- Comfortable faders for a balanced mix
- Output to monitor through earphones with PFL function
- PFL function per mix channel
- Peak LEDs in all the channels
- Bluetooth® Connectivity


ULTRA SLIM MIXER



SIDE VIEW



GRAPHIC EQ

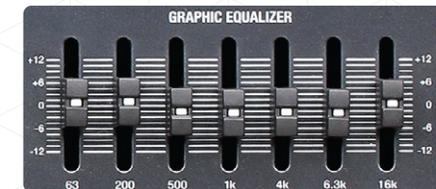

24-BIT MULTI-FX PROCESSOR

DSP with 99 internal effects



00 Small Hall	36 Reverse	82 Flanger & Reverb
03 Mid Hall	40 Early Refl	84 Phaser & Reverb
06 Big Hall	44 Ambience	86 Pitch & Reverb
09 Church	48 Stadium	88 Delay & Reverb
10 Small Room	49 Ambience Fx	90 Delay & Gated
13 Mid Room	50 Delay	91 Delay & Reverse
16 Big Room	59 Echo	92 Delay & Chorus
19 Chapel	60 Chorus	94 Delay & Flanger
20 Plate	66 Flanger	96 Delay & Phaser
27 Spring	70 Phaser	98 Delay & Pitch
30 Gated Rev	74 Pitch Shift	



MP3 INPUT

Through a data store device with USB or SD connection, audio files can be reproduced in the console.

TECHNICAL SPECIFICATIONS

Microphone Inputs	XLR type balanced	Max. Main Output Level	28dBu (stereo) / 22dBu (simple channel)
Microphone TRIM Gain Range	25dB (50mV IN @ 1kHz)	Earphone Output	PLUG type ¼" STEREO
Line/ Stereo Input	¼" TRS type balanced/unbalanced	Max. Earphones Output Level	22dBu
Line TRIM Gain Range	20dB (700mV IN @ 1 kHz)	MP3 Player	
S/N Ratio	111dB	Compatible Audio Formats	MP3
Distortion (THD+N)	0.05% measured with weighting curve A	DSP	
Frequency Response	20Hz-20kHz ±1.2dB	Converter	24 bit Sygma-Delta
Auxiliary Output	PLUG type ¼" TS unbalanced	Sample Frequency	48 kHz
Main Outputs	PLUG type ¼" TRS balanced	Power Supply Input	2 x 18V AC ~ 700mA



PACKING INFO

MASTER DIMENSIONS:	475x395x355 mm 18.7x15.6x14 in
GROSS WEIGHT:	20.85 kg 45.97 lb
MASTER PIECES:	5 PCS

MIXER NVK 20M USB

20 CHANNEL
MIXER

The multi-use NVK 20M USB blends 20 MIC/LINE channels with individual 3-band EQ, AUX/FX sends and inserts in all channels.

An essential versatile console to live-sound and studio recording.

Digital FX Processor with 99 multiple effects and MP3 Player with individual EQ/level control to play all file types with precision.

Robust and resistant construction suitable for installation in multiple spaces.



- ▶ **20 Channels and line inputs**
For complex live performances and recording sessions it is very important to have multiple inputs and MIC preamps.
- ▶ **MP3 player with LCD display and individual EQ**
Player compatible with files MP3, WAV and WMA and 2-bands EQ individual control to set the sound with precision.
- ▶ **Stereo sub-group output**
Sub-mix grouping and sending to external effects, recording system or parallel mix.
- ▶ **Auxiliary sends**
2 auxiliary sends pre-fader for monitoring system or external processing.
- ▶ **Insert in all channels**
It is usually used for dynamic processors, the signal is bridged with the connector fully inserted sending and receiving the signal simultaneously by the same line.
- ▶ **FX send and return**
FX send and return to connect an external effects processor or to an additional monitoring system.

▶ SIDE VIEW




▶ BACK VIEW



▶ MASTER GRAPHIC EQ

7-band graphic equalizer to obtain a balanced mix.



MAIN FEATURES

20 Channels with Phantom Power (+48V) and Microphone's preamplifier	Built-in MP3 player with LCD display and individual equalization	Faders for a balanced mix /// FX send and return
20 Line Inputs /// Insert in all channels	Compatible with memories USB and SD	Direct USB MP3 Recording
Bluetooth® Connectivity	Stereo sub-group output	Output to monitor through earphones with PFL function
3 Bands Equalizer And High Pass Filter Per Channel	3 auxiliary sendings of independent monitoring and effects	PFL and Mute functions per channel
Graphic stereo equalizer of 7 bands for the Master	DSP with 99 internal effects	Compatible with files MP3, WAV and WMA

▶ Specifications subject to change without notice.

▶ FRONT VIEW



TECHNICAL SPECIFICATIONS

Microphone Inputs	Type XLR balanced	Auxiliary Output	Type ¼" TRS unbalanced
Microphone Input Impedance	2.6kΩ (balanced)	Auxiliary Output Impedance	120 Ω (unbalanced)
Microphone max. Input level	12dBu (Min. gain @ 1kHz before clipping)	Auxiliary Output max. level	22dBu
Microphone TRIM gain range	5dB to 60dB	Main Outputs	Type XLR and ¼" TRS balanced
Line Inputs	Type ¼" TRS balanced	Main Output Impedance	120Ω (unbalanced)
Line Input Impedance	20kΩ (balanced)	Main Output max. level	28dBu (balanced) / 22dBu (unbalanced)
Line max. input level	30dBu (Min. gain @ 1kHz before clipping)	Earphones Output	Type ¼" TRS unbalanced
Line TRIM gain range	-10dB to 40dB	Earphones Output max. level	19dBu /150Ω
Signal - Noise Ratio (S/N Ratio)	110dB / 112dB(A)	MP3 Player	
Distortion (THD+N)	0.005% / 0.004% (A weighing)	Compatible audio formats	MP3, WAV, WMA
Frequency Response	<10Hz-90kHz> 0dB/-1dB	DSP	
EQ per channel	Low 80 Hz (±15dB), Mid 2.5 kHz (±15dB), High 12 kHz (±15dB)	Converter	24 bit Sigma-Delta
High Pass Filter	100 Hz	Sample Frequency	40 kHz
EQ Master	63Hz, 200Hz, 500Hz, 1kHz, 4kHz, 6.3kHz	Power Supply	90V - 240V – 60/50 Hz
	y 16kHz (±12dB)	Energy Consumption	55W

Cod. 6000417

24-BIT MULTI-FX PROCESSOR

DSP with 99 internal effects

Over 10 types of reverbs, multiple delays and effects combinations to provide color to the mix.



- | | |
|----------------|---------------------|
| 00 Small Hall | 59 Echo |
| 03 Mid Hall | 60 Chorus |
| 06 Big Hall | 66 Flanger |
| 09 Church | 70 Phaser |
| 10 Small Room | 74 Pitch Shift |
| 13 Mid Room | 80 Chorus & Reverb |
| 16 Big Room | 82 Flanger & Reverb |
| 19 Chapel | 84 Phaser & Reverb |
| 20 Plate | 86 Pitch & Reverb |
| 27 Spring | 88 Delay & Reverb |
| 30 Gated Rev | 90 Delay & Gated |
| 36 Reverse | 91 Delay & Reverse |
| 40 Early Refl | 92 Delay & Chorus |
| 44 Ambience | 94 Delay & Flanger |
| 48 Stadium | 96 Delay & Phaser |
| 49 Ambience Fx | 98 Delay & Pitch |
| 50 Delay | |



PACKING INFO

MASTER DIMENSIONS: 485x315x935 mm
19.1x12.4x36.8 in

GROSS WEIGHT: 25.2 kg
55.56 lb

MASTER PIECES: 2 PCS

▶ 20 CHANNEL
▶ MIXER

09

MIXER NVK 16M USB

16 CHANNEL MIXER

NVK 16M USB with robust and resistant construction, multiple MIC/LINE inputs, 3-bands EQ, AUX/FX sends and inserts in all channels, is the best option to use in fixed and mobile live/recording sound systems.

Digital FX Processor with 99 multiple effects and MP3 Player with individual EQ/level control to play all types of files with precision.



- ▶ **16 Channels and line inputs**
For all kinds of live performances and recording sessions.
- ▶ **MP3 player with LCD display and individual EQ**
Player compatible with files MP3, WAV and WMA and 2-band EQ individual control to set the sound with precision.
- ▶ **Stereo sub-group output**
Sub-mix grouping and sending to external effects, recording system or parallel mix.
- ▶ **Auxiliary sends**
2 auxiliary sends pre-fader for monitoring system or external processing.
- ▶ **Insert in all channels**
It is usually used for dynamic processors, the signal is bridged with the connector fully inserted sending and receiving the signal simultaneously by the same line.
- ▶ **FX send and return**
FX send and return to connect an external effects processor or to an additional monitoring system.

▶ SIDE VIEW



▶ REAR VIEW



▶ MASTER GRAPHIC EQ

7-band graphic equalizer to obtain a balanced mix.



MAIN FEATURES

16 Channels with Phantom Power (+48V) and Microphone's preamplifier	Built-in MP3 player with LCD display and individual equalization	Faders for a balanced mix /// FX send and return
16 Line Inputs /// Insert in all channels	Compatible with memories USB and SD	Direct MP3 USB Recording
Bluetooth® Connectivity	Stereo sub-group output	Output to monitor through earphones with PFL function
3 band equalizer and high pass filter per channel	3 auxiliary sendings of independent monitoring and effects	PFL and Mute functions per channel
Graphic stereo equalizer of 7 bands for the Master	DSP with 99 internal effects	Compatible with files MP3, WAV and WMA

▶ Specifications subject to change without notice.



TECHNICAL SPECIFICATIONS


Microphone Inputs	Type XLR balanced	Auxiliary Output	Type ¼" TRS unbalanced
Microphone Input Impedance	2.6kΩ (balanced)	Auxiliary Output Impedance	120 Ω (unbalanced)
Microphone max. Input level	12dBu (Min. gain @ 1kHz before clipping)	Auxiliary Output max. level	22dBu
Microphone TRIM gain range	5dB to 60dB	Main Outputs	Type XLR and ¼" TRS balanced
Line Inputs	Type ¼" TRS balanced	Main Output Impedance	120 Ω (unbalanced)
Line Input Impedance	20kΩ (balanced)	Main Output max. level	28dBu (balanced) / 22dBu (unbalanced)
Line max. input level	30dBu (Min. gain @ 1kHz before clipping)	Earphones Output	Type ¼" TRS unbalanced
Line TRIM gain range	-10dB to 40dB	Earphones Output max. level	19dBu / 150Ω
Signal - Noise Ratio (S/N Ratio)	110dB / 112dB(A)	MP3 Player	
Distortion (THD+N)	0.005% / 0.004% (A weighing)	Compatible audio formats	MP3, WAV, WMA
Frequency Response	<10Hz- 90kHz> 0dB/-1dB	DSP	
EQ per channel	Low 80 Hz (±15dB), Mid 2.5 kHz (±15dB) High 12 kHz (±15dB)	Converter	24 bit Sigma-Delta
High Pass Filter	100 Hz	Sample Frequency	40 kHz
EQ Master	63Hz, 200Hz, 500Hz, 1kHz, 4kHz, 6.3kHz y 16kHz (±12dB)	Power Supply	90V - 240V – 60/50 Hz
		Energy Consumption	45W

Cod. 6000416

24-BIT MULTI-FX PROCESSOR

DSP with 99 internal effects

Over 10 types of reverbs, multiple delays and effects combinations to provide color to the mix.

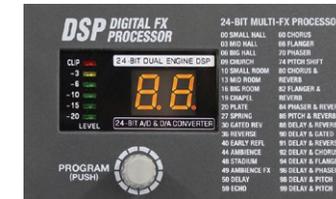

- | | |
|----------------|---------------------|
| 00 Small Hall | 59 Echo |
| 03 Mid Hall | 60 Chorus |
| 06 Big Hall | 66 Flanger |
| 09 Church | 70 Phaser |
| 10 Small Room | 74 Pitch Shift |
| 13 Mid Room | 80 Chorus & Reverb |
| 16 Big Room | 82 Flanger & Reverb |
| 19 Chapel | 84 Phaser & Reverb |
| 20 Plate | 86 Pitch & Reverb |
| 27 Spring | 88 Delay & Reverb |
| 30 Gated Rev | 90 Delay & Gated |
| 36 Reverse | 91 Delay & Reverse |
| 40 Early Refl | 92 Delay & Chorus |
| 44 Ambience | 94 Delay & Flanger |
| 48 Stadium | 96 Delay & Phaser |
| 49 Ambience Fx | 98 Delay & Pitch |
| 50 Delay | |



PACKING INFO

MASTER DIMENSIONS:	485x315x815 mm 19.1x12.4x32.1 in
GROSS WEIGHT:	23.06 kg 52.03 lb
MASTER PIECES:	2 PCS

16 CHANNEL
MIXER

11

MIXER NVK 1200P USB

12 CHANNEL
POWERED MIXER



► Powered to connect directly to the speakers



Cod. 6000412

The NVK 1200P USB is designed with the concept of all in one, ready to work. 8 mic preamp, 2 stereo channels, DSP with internal Delay/Reverb effects and MP3 Player with display and individual controls, it is a perfect option for sound reinforcement in all places.



► 12 CHANNEL
► POWERED MIXER



MAIN FEATURES

600W+600W Program Power	8 channels with Phantom Power (+48V) and microphone preamplifier
1200W+1200W Peak Power	2 stereo balanced channels
DSP with internal effects (Delay / Reverb)	Powered to connect directly to the speakers
Built in MP3 player with display and individual equalization	Aux sends of monitoring/ effects (post-fader)
Compatible with MP3, WAV and WMA files.	Comfortable faders for balanced mixes
Bluetooth® Connectivity	PFL and Mute functions per channel
3 band Equalizer per channel	Peak LEDs in all channels
7 band Graphic Equalizer for the Master	Dual fader control of stereo master (L+R)
Output to monitor through earphones with PFL function	Direct MP3 USB Recording

► REAR VIEW



► Speakon Outputs

► Specifications subject to change without notice.



▶ FRONT VIEW

▶ 8 channels with Phantom Power (+48V) and microphone preamplifier

▶ 2 stereo channels



▶ DSP with internal effects (Delay / Reverb)



▶ Built in MP3 player with display and individual equalization



▶ Graphic EQ



TECHNICAL SPECIFICATIONS

Microphone Input	Balanced XLR	Max. Aux Return input level	19dBu -6.8V (Min. gain @ 1kHz before clipping)
Microphone input impedance	2.6kΩ (balanced)	Main Output	Type ¼" TRS balanced
Max. Mic input level	0.3dBu – 800mV (Min. gain @ 1kHz before clipping)	Main output impedance	120 Ω (unbalanced)
Microphone Gain Range	25dB (50mV IN @ 1kHz)	Max. Main Output level	28dBu (stereo) / 22dBu (simple channel)
Stereo lines input	Type ¼" TRS balanced	Phones Output	Type ¼" TRS unbalanced
Line input impedance	20kΩ(balanced)	Max. Phones output level	22dBu
Max. Line input level	19dBu – 6.8V (Min. gain @ 1kHz before clipping)	Powered output	Speakon
Line Gain range	20dB (700mV IN @ 1 kHz)	MP3 player compatible audio formats	MP3, WAV, WMA
Signal/Noise Ratio	111dB	DSP	
Distortion (THD+N)	0.005% curve A weighing	Converter	24 bit Sigma-Delta
Frequency Response	20Hz- 20kHz ±1.2dB	Sample Frequency	44.1 kHz
EQ Master	(63Hz, 200Hz, 500Hz, 1kHz, 4kHz, 6.3kHz,16kHz) ±12dB	RMS Power (per channel)	300W @ 4 Ω
EQ by channel	Low 80 Hz ± 15dB/ Mid 2.5kHz ± 15dB / High 12kHz ±15dB	Program Power (per channel)	600W @ 4Ω
Aux Send output	Type ¼" TS unbalanced	Peak Power (per channel)	1200W @ 4Ω
Aux Send output impedance	120 Ω (unbalanced)	Min. Charge Impedance per channel	4Ω
Max. Aux Send level	22dBu	Power Supply	110V/220V ~ 60Hz/50 Hz
Aux. Return input	Tipo ¼" TS unbalanced	Energy Consumption	710 W
Aux. Return impedance	10 kΩ (unbalanced)		



PACKING INFO

MASTER DIMENSIONS:	755x370x522 mm 29.7x14.6x20.6 in
GROSS WEIGHT:	36 kg 79.37 lb
MASTER PIECES:	4 PCS

▶ POWERED MIXER ▶ 12 CHANNEL

MIXER NVK 800P USB

**8 CHANNEL
POWERED MIXER**

The NVK 800P USB is a robust portable powered mixer with 4 mic preamp, 2 stereo channels, internal Delay/Reverb effects, MP3 Player with display and individual controls, combines portability and great power.



► Powered to connect directly to the speakers



Cod. 6000411

POWERED MIXER ► 8 CHANNEL

www.novikneo.com

MAIN FEATURES

600W+600W Program Power	4 channels with Phantom Power (+48V) and microphone preamplifier
1200W+1200W Peak Power	2 stereo balanced channels
DSP with internal effects (Delay / Reverb)	Powered to connect directly to the speakers
Built in MP3 player with display and individual equalization	Aux sends of monitoring/ effects (post-fader)
Compatible with MP3, WAV and WMA files.	Comfortable faders for balanced mixes
3 bands Equalizer per channel	PFL and Mute functions per channel
7 bands Graphic Equalizer for the Master	Peak LEDs in all channels
Output to monitor through earphones with PFL function	Dual fader control of stereo master (L+R)
Bluetooth® Connectivity	Direct MP3 USB Recording

► REAR VIEW



► Speakon Outputs



▶ FRONT VIEW

▶ 4 channels with Phantom Power (+48V) and microphone preamplifier

▶ 2 stereo channels



▶ Built in MP3 player with display and individual equalization



▶ DSP with internal effects (Delay / Reverb)



▶ Graphic EQ



TECHNICAL SPECIFICATIONS

Microphone Input	Balanced XLR
Microphone input impedance	2.6kΩ (balanced)
Max. Mic input level	0.3dBu – 800mV (Min. gain @ 1kHz before clipping)
Microphone Gain Range	25dB (50mV IN @ 1kHz)
Stereo lines input	Type ¼" TRS balanced
Line input impedance	20kΩ(balanced)
Max. Line input level	19dBu – 6.8V (Min. gain @ 1kHz before clipping)
Line Gain range	20dB (700mV IN @ 1 kHz)
Signal/Noise Ratio	111dB
Distortion (THD+N)	0.005% curve A weighing
Frequency Response	20Hz- 20kHz ±1.2dB
EQ Master	(63Hz, 200Hz, 500Hz, 1kHz, 4kHz, 6.3kHz, 16kHz) ±12dB
EQ by channel	Low 80 Hz ±15dB / Mid 2.5kHz±15dB / High 12kHz ±15dB
Aux Send output	Type ¼" TS unbalanced
Aux Send output impedance	120 Ω (unbalanced)
Max. Aux Send level	22dBu
Aux. Return input	Tipo ¼" TS unbalanced
Aux. Return impedance	10 kΩ (unbalanced)

Max. Aux Return input level	19dBu – 6.8V (Min. gain @ 1kHz before clipping)
Main Output	Type ¼" TRS balanced
Main output impedance	120 Ω (unbalanced)
Max. Main Output level	28dBu (stereo) / 22dBu (simple channel)
Phones Output	Type ¼" TRS unbalanced
Max. Phones output level	22dBu
Powered output	Speakon
MP3 player compatible audio formats	MP3, WAV, WMA
DSP	
Converter	24 bit Sygma-Delta
Sample Frequency	44.1 kHz
RMS Power (per channel)	300W @
Program Power (per channel)	600W @ 4 Ω
Peak Power (per channel)	1200W @ 4 Ω
Min. Charge Impedance per channel	4 Ω
Power Supply	110V/220V ~ 60Hz/50 Hz
Energy Consumption	690 W



PACKING INFO

MASTER DIMENSIONS:	755x410x370 mm 29.7x16.1x14.6 in
GROSS WEIGHT:	30.05 kg 66.25 lb
MASTER PIECES:	4 PCS

POWERED MIXER ▶ 8 CHANNEL

MIXER NVK 8500BT

8 CHANNEL POWERED MIXER



- Bluetooth® and MP3 Media Player
- 8 CHANNEL with ultra-silence pre-amplifiers
- FX Digital Delay

- ▶ The NVK Powered Mixer Series designed for any application with a durable and rugged construction, ready to work with ultra-silence preamps.
- ▶ Offers MP3 Player, Bluetooth® function, USB/SD memories receptor. Digital Delay assigned to each channel. It's a perfect option for sound reinforcement in any places.

MAIN FEATURES

- Multi-channel powered mixer
- MP3 player / USB/SD connector
- Bluetooth®
- LCD display
- Remote control
- XLR Balanced Mic Inputs
- 1/4" jack & RCA Line Inputs / SUB Out
- CD / Tape in / REC Out
- 2-Band EQ on each channel
- Effect control on each channel
- Effect level, time, repeat control in Master
- 5-band graphic equalizer in Master



▶ SIDE VIEW



▶ REAR VIEW





► Includes handle for easy transport



► Remote control



► Graphic EQ



► MP3 Player



COD. 6000408



COD. 6000410



COD. 6000409

SPECIFICATIONS

Microphone Input
 Microphone input impedance
 Max. Mic input level
 Microphone Gain Range
 Line input
 Line input impedance
 Max. Line input level
 Line Gain range
 Signal/Noise Ratio
 Distortion (THD+N)
 Frequency Response
 EQ Master
 EQ by channel
 Main Output
 Digital effect
 MP3 Player
 Compatible audio formats
 RMS Power
 Program Power
 Peak Power
 Min. Charge Impedance per channel
 Power Supply
 Energy Consumption

NVK 8500BT

Balanced XLR x8
 2.6kΩ (balanced)
 +12 dBu @ +10 dB gain
 +10 to +60 dB
 Balanced ¼" TRS x8
 20kΩ(balanced)
 19dBu -- 6.8V (Min. gain @ 1kHz before clipping)
 +22 dBu@ 0 dB Gain
 111dB
 0.005% / 0.004% curve A weighing
 <10 Hz -150 kHz (-1 dB)
 (60Hz, 250Hz, 1kHz, 4kHz, 12kHz) ±12dB
 Low 60 Hz ± 15dB/ High 10kHz ±15dB
 Type ¼" TRS balanced
 Delay
 Yes
 MP3, WAV, WMA
 250W @ 4 Ω
 500W @ 4Ω
 1000W @ 4Ω
 4Ω
 110V/220V ~ 60Hz/50 Hz
 500 W

NVK 6400BT

Balanced XLR x6
 2.6kΩ (balanced)
 +12 dBu @ +10 dB gain
 +10 to +60 dB
 Balanced ¼" TRS x6
 20kΩ(balanced)
 19dBu -- 6.8V (Min. gain @ 1kHz before clipping)
 +22 dBu@ 0 dB Gain
 111dB
 0.005% / 0.004% curve A weighing
 <10 Hz -150 kHz (-1 dB)
 (60Hz, 250Hz, 1kHz, 4kHz, 12kHz) ±12dB
 Low 60 Hz ± 15dB/ High 10kHz ±15dB
 Type ¼" TRS balanced
 Delay
 Yes
 MP3, WAV, WMA
 200W @ 4 Ω
 400W @ 4Ω
 800W @ 4Ω
 4Ω
 110V/220V ~ 60Hz/50 Hz
 400 W

NVK 4300BT

Balanced XLR x4
 2.6kΩ (balanced)
 +12 dBu @ +10 dB gain
 +10 to +60 dB
 Balanced ¼" TRS x4
 20kΩ(balanced)
 19dBu -- 6.8V (Min. gain @ 1kHz before clipping)
 +22 dBu@ 0 dB Gain
 111dB
 0.005% / 0.004% curve A weighing
 <10 Hz -150 kHz (-1 dB)
 (60Hz, 250Hz, 1kHz, 4kHz, 12kHz) ±12dB
 Low 60 Hz ± 15dB/ High 10kHz ±15dB
 Type ¼" TRS balanced
 Delay
 Yes
 MP3, WAV, WMA
 150W @ 4 Ω
 300W @ 4Ω
 600W @ 4Ω
 4Ω
 110V/220V ~ 60Hz/50 Hz
 300 W

PACKING INFO NVK-8500BT

MASTER DIMENSIONS:
 525x295x560mm 20.7x11.6x22in

GROSS WEIGHT: 21 kg
 46.30 lb

MASTER PIECES:
 2 PCS

PACKING INFO NVK-6400BT

MASTER DIMENSIONS:
 460x290x530mm 18.1x11.4x20.9in

GROSS WEIGHT: 19 kg
 41.89 lb

MASTER PIECES:
 2 PCS

PACKING INFO NVK-4300BT

MASTER DIMENSIONS:
 545x295x390mm 21.5x11.6x15.4in

GROSS WEIGHT: 17 kg
 37.48 lb

MASTER PIECES:
 2 PCS

► Specifications subject to change without notice.

NOVOD SERIES

HIGH PERFORMANCE AMPLIFIER CLASS-D TECHNOLOGIES



NOVOD 1600
1500W

NOVOD 2600
2400W



► Thanks to the innovative Class D design the NOVOD amplifiers are able to provide you with enormous power and incredible sonic performance in ultra-portable and lightweight package.

► CONNECTORS



STEREO AND BRIDGE MODE / XLR INPUT / SPEAKON OUTPUTS

► NOVOD SERIES

► POWER AMPLIFIERS

www.novikneo.com

18

FEATURES

- Superior Class D technology
- Maximum quality and power
- Less weight and less consumption for extra efficiency
- Auto-Limiter offers high gain output signals without distortion
- Thermal cut and short circuit protection
- XLR inputs
- Speakon Outputs
- Soft-Start

SPECIFICATIONS

Input connectors	XLR
Output connectors	Speakon
Input impedance	20k Ω - Balanced, 10k Ω un-Balanced
Output connections type	Stereo & Bridge Output
Amplifier type	Class D
Frequency Response	5Hz - 30kHz \pm 1dB
S/N Ratio	100dB
THD	\leq 0.03% (Bohm/1KHz/half power)
Crosstalk	$>$ 80 dB @ Rated Output/8 Ω /1kHz
Damping Factor	$>$ 1000 @ 8 Ω /1kHz
Slew Rate	20 V/ μ S
Stereo Output Power (8 Ω)	600 W + 600 W
Stereo Output Power (4 Ω)	1200 W + 1200 W
Bridge Output Power (8 Ω)	2400 W
Minimum Impedance load	4 Ω
Cooling System	Active cooling fan
Protection	Soft Start, Short Circuit, Limiter, DC Fault, AC Line Fuse, Thermal Cut
Main Power Supply	AC 115/230 V – 60/50 Hz – Power Source Switching
Consumption	2750W

COD. 6000506

NOVOD 2600

Input connectors	XLR
Output connectors	Speakon
Input impedance	20k Ω - Balanced, 10k Ω un-Balanced
Output connections type	Stereo & Bridge Output
Amplifier type	Class D
Frequency Response	5Hz - 30kHz \pm 1dB
S/N Ratio	100dB
THD	\leq 0.03% (Bohm/1KHz/half power)
Crosstalk	$>$ 80 dB @ Rated Output/8 Ω /1kHz
Damping Factor	$>$ 1000 @ 8 Ω /1kHz
Slew Rate	20 V/ μ S
Stereo Output Power (8 Ω)	600 W + 600 W
Stereo Output Power (4 Ω)	1200 W + 1200 W
Bridge Output Power (8 Ω)	2400 W
Minimum Impedance load	4 Ω
Cooling System	Active cooling fan
Protection	Soft Start, Short Circuit, Limiter, DC Fault, AC Line Fuse, Thermal Cut
Main Power Supply	AC 115/230 V – 60/50 Hz – Power Source Switching
Consumption	2750W

COD. 6000505

NOVOD 1600

Input connectors	XLR
Output connectors	Speakon
Input impedance	20k Ω - Balanced, 10k Ω un-Balanced
Output connections type	Stereo & Bridge Output
Amplifier type	Class D
Frequency Response	20Hz-30kHz \pm 1dB
S/N Ratio	96dB
THD	\leq 0.07% (Bohm/1KHz/half power)
Crosstalk	$>$ 82 dB @ Rated Output/8 Ω /1kHz
Damping Factor	$>$ 700 @ 8 Ω /1kHz
Slew Rate	15 V/ μ S
Stereo Output Power (8 Ω)	375 W + 375 W
Stereo Output Power (4 Ω)	750 W + 750 W
Bridge Output Power (8 Ω)	1500 W
Minimum Impedance load	4 Ω
Cooling System	Active cooling fan
Protection	Soft Start, Short Circuit, Limiter, DC Fault, AC Line Fuse, Thermal Cut
Main Power Supply	AC 115/230 V – 60/50 Hz – Power Source Switching
Consumption	1625W

PACKING INFO NOVOD 2600

MASTER DIMENSIONS:
530x400x160 mm 20.5x15.7x6.3 in

GROSS WEIGHT:
6.12 kg 13.49 lb

MASTER PIECES:
1 PCS

PACKING INFO NOVOD 1600

MASTER DIMENSIONS:
530x360x170mm 20.9x14.2x6.7in

GROSS WEIGHT:
5.71 kg 12.59 lb

MASTER PIECES:
1 PCS

NOVO I60BT

P.A. POWERED MIXER

COD. 6000508




60W RMS

- 3 INPUT CHANNEL
- USB MP3 PLAYER
- 100V OUTPUT

SPECIFICATIONS

- › RMS Output power 60W
- › 3 Channel
- › Mic Input
- › Input sensitivity-42dB
- › 1 Aux Input
- › Input sensitivity-20dB
- › MP3 player system with USB
- › Bluetooth®
- › Speaker Output 4ohm, 8ohm, 16ohm
- › Line output 100V
- › Frequency Response 20Hz-20Khz
- › T.H.D 0.8%
- › S/N Ratio <75dB
- › Power supply 100-230V~60/50Hz
- › Specifications subject to change without notice.

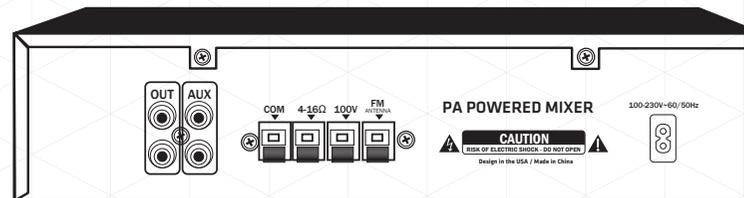

 **CLASS-D**
AMPLIFIER

 **Bluetooth®**

 PACKING INFO NOVOD I60BT

MASTER DIMENSIONS:
541x 321x535 mm 21.2x12.6x21.06 in

GROSS WEIGHT:
19 kg 41.8 lb

MASTER PIECES:
10 PCS

› Specifications subject to change without notice.

NOVO SERIES

POWERFUL, RUGGED AND VERSATILE POWER AMPLIFIER



The NOVO series is a multi-purpose power amplifier. Designed to concerts, bars, clubs, houses of worship, convention centers and many others applications provided the best sound quality. Technology, design and reliability characterize NOVO Series through the years.

NOVO 2500

COD. 6000504

Stereo / parallel / bridge-mono mode.
User selectable input sensitivity: -0.77V and 1.4V
XLR and TRS inputs; Speakon® and binding post outputs.
LCD Screen; channel temperature; protect, clip and signal presence LED.
Two turbo cooling grilles.

- ▶ Stereo mode. Two channel temperature.
- ▶ Parallel mode. Two channel temperature.
- ▶ Bridge mode. Two channel temperature.



▶ FRONT VIEW



▶ REAR VIEW



SPECIFICATIONS

RMS output power 8 ohm / Bridge: 2500W	Channel crosstalk at rated power output: >58dB
RMS output power 4 ohm: 1250W	Damping factor: >300
RMS output power 8 ohm: 1000W	Power supply: AC 115/230V 60Hz/50Hz
Frequency Response: 20 Hz- 20KHz, +1/ -1dB	Dimensions (WxDxH): 19" x 16.1" x 3.5"
Total Harmonic Distortion (THD): <0.5%, 20Hz- 20KHz	(482mm x 410mm x 88mm)
Input Impedance: 20 kΩ Balanced & 10 kΩ un-Balanced	Weight: 16, 2 kg (35lb)
S/N Rate: >85 dB	

PACKING INFO NOVO 2500

MASTER DIMENSIONS:
482x386x890 mm 19x15.2x35 inc

GROSS WEIGHT:
16.2 kg 35.71 lb

MASTER PIECES:
1 PCS

▶ Specifications subject to change without notice.



► REAR VIEW



FEATURES

NOVO 1500

Stereo / parallel / bridge-mono mode.
 User selectable input sensitivity: -0.77V and 1.4V
 XLR and TRS inputs; Speakon® and binding post outputs.
 Mode, protect, clip and signal presence LED.
 Two turbo cooling grilles.

NOVO 900 / NOVO 500

Stereo / parallel / bridge-mono mode.
 User selectable input sensitivity: -0.77V and 1.4V
 RCA, XLR and TRS inputs; Speakon® and binding post outputs.
 Mode, protect, clip and signal presence LED.
 Two level controls.
 Limiter.

SPECIFICATIONS

NOVO 1500
COD. 6000503

RMS output power 8 ohm / Bridge: 1500W
RMS output power 4 ohm: 750W
RMS output power 8 ohm: 600W
Frequency Response: 20 Hz- 20KHz, +1/ -1dB
Total Harmonic Distortion (THD): <0.5%, 20Hz- 20KHz
Input Impedance: 20 kΩ Balanced & 10 kΩ un-Balanced
S/N Rate: >85 dB
Channel crosstalk at rated power output: >58dB
Damping factor: >300
Power supply: AC 115/230V 60Hz/50Hz
Dimensions (WxDxH): 19" x 15.6" x 3.5" (482mm x 395mm x 88mm)
Weight: 15, 5 kg (34lb)V

NOVO 900
COD. 6000502

RMS output power 8 ohm / Bridge: 900W
RMS output power 4 ohm: 450W
RMS output power 8 ohm: 300W
Frequency Response: 20 Hz- 20KHz, +1/ -1dB
Total Harmonic Distortion (THD): <0.5%, 20Hz- 20KHz
Input Impedance: 20 kΩ Balanced & 10 kΩ un-Balanced
S/N Rate: >85 dB
Channel crosstalk at rated power output: >58dB
Damping factor: >300
Power supply: AC 115/230V 60Hz/50Hz
Dimensions (WxDxH): 19" x 12.5" x 3.5" (482mm x 317mm x 88mm)
Weight: 10, 1 kg (22lb)

NOVO 500
COD. 6000501

RMS output power 8 ohm / Bridge: 500W
RMS output power 4 ohm: 250W
RMS output power 8 ohm: 150W
Frequency Response: 20 Hz- 20KHz, +1/ -1dB
Total Harmonic Distortion (THD): <0.5%, 20Hz- 20KHz
Input Impedance: 20 kΩ Balanced & 10 kΩ un-Balanced
S/N Rate: >85 dB
Channel crosstalk at rated power output: >58dB
Damping factor: >300
Power supply: AC 115/230V 60Hz/50Hz
Dimensions (WxDxH): 19" x 12.5" x 3.5" (482mm x 317mm x 88mm)
Weight: 8, 6 kg (18lb)

PACKING INFO NOVO 1500

MASTER DIMENSIONS:
 482x386x890 mm 19x15.2x35 in

GROSS WEIGHT: 15.5 kg 34.17 lb
 MASTER PIECES: 1 PCS

PACKING INFO NOVO 900

MASTER DIMENSIONS:
 482x386x890 mm 19x15.2x35 in

GROSS WEIGHT: 10.1 kg 22.27 lb
 MASTER PIECES: 1 PCS

PACKING INFO NOVO 500

MASTER DIMENSIONS:
 482x386x890 mm 19x15.2x35 in

GROSS WEIGHT: 8.6 kg 18.96 lb
 MASTER PIECES: 1 PCS

► Specifications subject to change without notice.

LIRIC SERIES

SURFACE MOUNT SPEAKERS



LIRIC 8


LIRIC 6

- The LIRIC Series is pure NOVIK NEO style, combining high performance, compact design and rugged construction into a line of loudspeaker systems with unprecedented versatility and one of the easiest systems to install available anywhere.
- Perfect for applications where tight corners and tough angles are all too common, the LIRIC 5, 6 & 8 features a wide variety of available mounting systems allowing enclosures to be easily positioned for optimum performance.
- Don't be fooled by the small size. The LIRIC is big on features and sound quality.



LIRIC 5

Dimensions

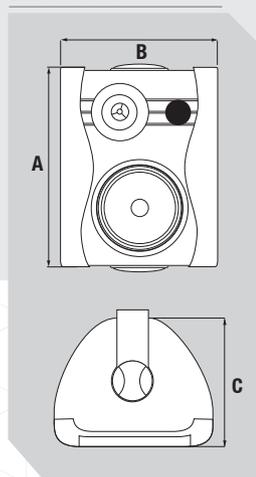

Full range configuration.



8" woofer

Tweeter



Terminal connectors

Directional handle control



Easy orientation



Mounting bracket included.



Also in white.

SPECIFICATIONS

LIRIC 8

COD. 6000052
VV COD. 6000055

LIRIC 6


COD. 6000051
VV COD. 6000054

LIRIC 5

COD. 6000050
VV COD. 6000053

Ways:	2	2	2
Bass speaker unit:	8"	6.5"	5"
Frequency response:	60Hz-20KHz	80Hz-20KHz	100Hz-20KHz
Sensitivity:	92dB (SPL 1w/1m)	89dB (SPL 1w/1m)	88dB (SPL 1w/1m)
RMS power:	125W	100W	40W
Continuous power:	250W	200W	80W
Peak power handling:	500W	400W	160W
Impedance:	8 Ohms	8 Ohms	8 Ohms
Dimensions:	A 355 x B 270 x C 220 mm A 10.6 x B 14 x C 8.7"	A 290 x B 210 x C 170 mm A 8.3 x B 11.4 x C 6.7"	A 240 x B 180 x C 140 mm A 7.1 x B 9.45 x C 5.5"
Weight:	12.1lb (5.5Kg)	7.7lb (3.5Kg)	5.5lb (2.5Kg)
Transducer unit low:	Coil-diameter: 1.4" (35mm)	Coil-diameter: 1" (25mm)	Coil-diameter: 1" (25.5mm)
	Coil-diameter: 2.5" (63mm)	Hi: Coil-diameter: 2" (50mm)	Hi: Coil-diameter: ½" (13.28mm)

LIRIC 8

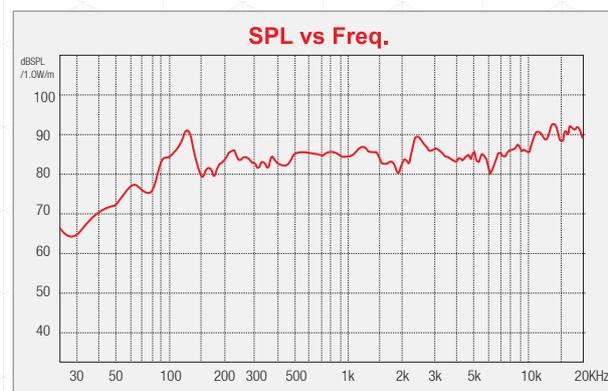

PACKING INFO LIRIC 8

MASTER DIMENSIONS:
436x330x552mm 17.2x13x21.7in

GROSS WEIGHT: 14 kg 30.86 lb
MASTER PIECES: 1 PCS

PACKING INFO LIRIC 6

MASTER DIMENSIONS:
380x452x550mm 15x17.8x21.7in

GROSS WEIGHT: 16.7 kg 36.82 lb
MASTER PIECES: 2 PCS

PACKING INFO LIRIC 5

MASTER DIMENSIONS:
330x396x442mm 13x15.6x17.4in


GROSS WEIGHT: 11.1 kg 24.47 lb
MASTER PIECES: 2 PCS

IN-WALL / CEILING SPEAKERS

- The in-ceiling series combines modern design and great audio to satisfy those seeking high quality audio playbacks.
- Wide frequency range, deep bass, clear and defined treble are combined with a suitable design to install in any wall or ceiling prioritizing the excellent esthetics of the enclosure.
- Ceiling speakers is made of high quality materials to ensure the best performance, a robust structure with protection grid and easy installation system.

▶ NWS 8160 - DIMENSIONS

Easily installation both in-wall and in ceiling.

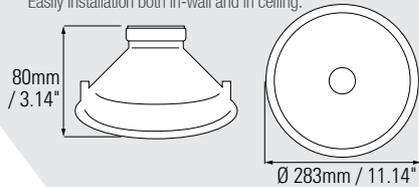

NWS 8160



▶ WALL REMOTE CONTROL



WRC 40 / WRC 30 / WRC 5

Power	40W	30W	5W
Adjusting	Transformer	Transformer	Potentiometer

SPECIFICATIONS

	NWS 8160 6000042	NWS 6120 6000041	NWS 5100 6000040
Ceiling speaker components	8" Full range	6" Full range	5" Full range
Frequency response:	45Hz~20KHz	65Hz~20KHz	80Hz~20KHz
Sensitivity:	93dB (+/-2dB)	91dB (+/-2dB)	88dB (+/-2dB)
Impedance:	8 Ohm	8 Ohm	8 Ohm
RMS power:	15W/7,5W/5W	8W	5W
Program power:	30W/15W/10W	16W	10W
Max power:	60W/30W/20W	32W	20W

Transformer for use of 70V/100V distributed lines.



NOVK 25

3 WAY COMPACT

- Full-range systems designed to ensure excellent audio playback quality.
- Wide range of frequencies covered due to its three-way amplification. Includes two Mylar Dome tweeters for high and mid frequencies, and 4" Mica woofer for defined and powerful bass.
- Its design is also characterized by the simple mounting system that provides, adapted to mount on any wall, column and angle in homes, businesses, restaurants, bars and any other places.
- Even though it's small, it provides high power!




TECHNICAL SPECIFICATIONS

Configurations:	3 Ways
Woofer size:	102mm (4")
Frequency response:	80Hz-21KHz
Sensibility:	88dB (SPL 1w/1m)
RMS power:	50W
Program power:	100W
Peak power:	200W
Impedance:	8 Ohm
Woofer material:	Mica
Weight:	8oz
MF Tweeter size:	50mm (2")
HF Tweeter size:	25mm (1")
Tweeter material:	Mylar Dome
Magnet weight (TW):	2oz
Box material:	ABS
Support:	Included
Colors:	Black or white
Dimensions (HxWxD):	21x14x12 cm (8.3x5.5x4.8")



Also in white.

DIMENSIONS

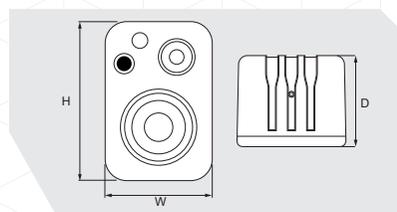

COD: 6000077
W COD: 6000076



Can be easily adjusted at your desired position to provide the best sound direction.

PACKING INFO NOVK 25

MASTER DIMENSIONS:	785x320x275 mm 30.9x12.6x10.8 in
GROSS WEIGHT:	19 kg 41.89 lb
MASTER PIECES:	6 PCS

EVOD 450BT

TWO-WAY

BI AMPLIFIED LOUDSPEAKER

Bluetooth®



- ▶ EVOD Series offers a complete system of mixing and playback, 3-channel, MP3 Player, MIC and Line inputs for the most sophisticated situations.
- ▶ Class D and bi amplified technology is higher performance.

MAIN FEATURES

-USB	-XLR/jack ¼" Output
-MP3 with display & player control	-Master volumen control
-3 channel mixer	-Clip LED + LCD display
-MP3 Player	-Side handles for easy movement
-XLR/jack ¼" MIC input	-Class D Technology
-XLR/RCA line input	-Bluetooth®

TECHNICAL SPECIFICATIONS

Configuration:	2 Way powered speaker
RMS power:	350W LF + 100W HF
Woofer:	15"
Driver:	1.75" (Titanium)
Frequency Response:	30Hz-20KHz
Nominal dispersion:	90° x 60°
Nominal impedance:	8 Ohm
Sensitivity:	97dB (1W/1m)
SPL max:	129dB
Dimensions (WxDxH):	53x47.5x76.5 cm (20.9"x18.7"x30.1")
Weight:	26 Kg (57lb)
AC Input:	110/220V ~ 60/50 Hz

PACKING INFO EVOD 450BT

MASTER DIMENSIONS:
530x475x765 mm 20.9x18.7x30.1 in

GROSS WEIGHT:
16.2 kg 35 lb

MASTER PIECES:
1 PCS

COD. 6000065



1800W



SNK-S3
SPEAKER STAND

COD. 6000037

PACKING INFO

MASTER DIMENSIONS: 365x315x103 mm
14.4x12.4x40.5 in

GROSS WEIGHT: 17.7kg
39 lb

MASTER PIECES: 4 PCS



EVO 350A USB

TWO-WAY

AMPLIFIED LOUDSPEAKER

Bluetooth®



► These powered speakers combine design and maximum power to perfectly adapt to any situation of live sound reinforcement, as musical performances, vocal, DJs, entertainment and more.

► EVO Series offers a complete system of mixing and playback, 3-channel, MP3 Player, MIC and Line inputs for the most sophisticated situations.

COD. 6000089
R COD. 6000132

MAIN FEATURES

-USB	-XLR/jack ¼" Output
-MP3 with display & player control	-5 band graphic EQ
-3 channel mixer	-Master volumen control
-MP3 Player	-Clip LED
-XLR/jack ¼" MIC input	-1400W
-XLR/RCA line input	-Side handles for easy movement

TECHNICAL SPECIFICATIONS

Configuration:	2 Way powered speaker
RMS power:	350W
Program power:	700W
Peak power:	1400W
Woofer:	15"
Driver:	1.75" (V.C.)
Frequency Response:	40Hz – 18 KHz (+-3dB)
Nominal dispersion:	90° x 60°
Nominal impedance:	8 Ohm
Sensitivity:	96dB (1W/1m)
SPL max:	125dB
Dimensions (WxDxH):	53x47.5x76.5 cm (20.9"x18.7"x30.1")
Weight:	26 Kg (57lb)
AC Input:	110/220V ~ 60/50 Hz



1400W

ALSO IN RED.

PACKING INFO

MASTER DIMENSIONS:	530x475x765 mm 20.9x18.7x30.1 in
GROSS WEIGHT:	25 kg 55.12 lb
MASTER PIECES:	1 PCS

AMPLIFIED LOUDSPEAKER ► EVO 350A USB

EVO 300A USB

TWO-WAY AMPLIFIED LOUDSPEAKER

Bluetooth®



- ▶ EVO Series offers a complete system of mixing and playback, 3-channel, MP3 Player, MIC and Line inputs for the most sophisticated situations.

MAIN FEATURES

-USB / SD	-Line Output (XLR)
-Bluetooth®	-EQ
-MP3 with display & player control	-Master volumen control
-2 MIC inputs (XLR/jack ¼")	-1000W
-Line input (XLR/RCA)	-Side handles for easy movement

TECHNICAL SPECIFICATIONS

Configuration:	2 Way powered speaker
RMS power:	250W
Program power:	500W
Peak power:	1000W
Woofer:	15"
Driver:	1.75" (Titanium)
Frequency Response:	40Hz – 18 KHz (+-3dB)
Nominal dispersion:	90° x 50°
Nominal impedance:	8 Ohm
Sensitivity:	94dB (1W/1m)
SPL max:	124dB
Dimensions (WxDxH):	53x46.5x76 cm (20.8"x18.3"x30")
Weight:	22 Kg (48lb)
AC Input:	110/220V ~ 60/50 Hz

CCD. 6000131
R.CCD. 6000134



1000W

ALSO IN RED.

PACKING INFO

MASTER DIMENSIONS:	530x475x765 mm 20.9x18.7x30.1 in
GROSS WEIGHT:	25 kg 55.12 lb
MASTER PIECES:	1 PCS

EVO 250A USB

TWO-WAY AMPLIFIED LOUDSPEAKER

Bluetooth®



- ▶ EVO Series offers a complete system of mixing and playback, 3-channel, MP3 Player, MIC and Line inputs for the most sophisticated situations.

COD. 6000088
R.COD. 6000133

MAIN FEATURES

-USB & EQ	-MP3 with display and player control
-Bluetooth®	-XLR/jack ¼" Output
-3 channel mixer	-Master volume control
-MP3 Player	-1000W
-XLR/jack ¼" MIC input	-Clip LED
-XLR/RCA line input	-Side handles for easy movement

TECHNICAL SPECIFICATIONS

Configuration:	2 Way powered speaker
RMS power:	250W
Program power:	500W
Peak power:	1000W
Woofer:	12"
Driver:	1.44" (Titanium)
Frequency Response:	45Hz – 18 KHz (+-3dB)
Nominal dispersion:	90° x 50°
Sensitivity:	94dB (1W/1m)
SPL max:	121dB
Dimensions (WxDxH):	46x37.5x66 cm (18.1"x14.8"x26")
Weight:	23 Kg (50lb)
AC Input:	110/220V ~ 60/50 Hz



ALSO IN RED.

PACKING INFO

MASTER DIMENSIONS:	465x375x480 mm 18.3x14.8x18.9 in
GROSS WEIGHT:	16.6 kg 36.60 lb
MASTER PIECES:	1 PCS

AMPLIFIED LOUDSPEAKER ▶ EVO250A USB

EVO 150A

TWO-WAY

AMPLIFIED LOUDSPEAKER

Bluetooth®



- ▶ These powered speakers combine design and maximum power to perfectly adapt to any situation of live sound reinforcement, as musical performances, vocal, DJs, entertainment and more. EVO Series offers a complete system of mixing and playback, 3-channel, MP3 Player, MIC and Line inputs for the most sophisticated situations.

MAIN FEATURES

-Bluetooth®	-Jack ¼" Output
-USB/SD digital audio player	-EQ Treble – Bass (+-12dB)
-3 channel mixer	-Master volume control
-XLR/jack ¼" MIC input	-Clip LED
-XLR/RCA line input	-Side handles for easy movement

TECHNICAL SPECIFICATIONS

Configuration:	2 Way powered speaker
RMS power:	150W
Program power:	300W
Peak power:	600W
Woofer:	10"
Driver:	1.34" (Titanium)
Frequency Response:	55Hz – 18 KHz (+-3dB)
Nominal dispersion:	90° x 60°
Sensitivity:	92dB (1W/1m)
SPL max:	120dB
Dimensions (WxDxH):	41x32.5x55 cm (16.1"x12.8"x21.7")
Weight:	11.5 Kg (25lb)
AC Input:	110/220V – 60/50 Hz

COD. 6000087



600W

ALSO IN RED.

PACKING INFO

MASTER DIMENSIONS:	410x325x275 mm 16.1x12.8x10.8 in
GROSS WEIGHT:	14 kg 30.86 lb
MASTER PIECES:	1 PCS

EVO 100A

TWO-WAY

AMPLIFIED LOUDSPEAKER

Bluetooth®



COD. 6000086

► These powered speakers combine design and maximum power to perfectly adapt to any situation of live sound reinforcement, as musical performances, vocal, DJs, entertainment and more. EVO Series offers a complete system of mixing and playback, 3-channel, MP3 Player, MIC and Line inputs for the most sophisticated situations.

MAIN FEATURES

-3 channel mixer	-Jack ¼" Output
-USB/SD digital media player	-EQ Treble – Bass (+-12dB)
-Jack ¼" MIC input	-Master volume control
-XLR/RCA line input	-Clip LED

TECHNICAL SPECIFICATIONS

Configuration:	2 Way powered speaker
RMS power:	100W
Program power:	200W
Peak power:	400W
Woofer:	8"
Driver:	1" (Titanium)
Frequency Response:	65Hz – 18 KHz (+-2dB)
Nominal dispersion:	90° x 60°
Sensitivity:	92dB (1W/1m)
SPL max:	118dB
Dimensions (WxDxH):	34.5x28x49 cm
Weight:	7 Kg
AC Input:	110/220V ~ 60/50 Hz



ALSO IN RED.

PACKING INFO

MASTER DIMENSIONS:	340X280X275 mm 13.4X11X10.8 in
GROSS WEIGHT:	8.6 kg 18.96 lb
MASTER PIECES:	1 PCS

EVO 15P

PASSIVE LOUDSPEAKER SYSTEM



COD. 600097
W. COD. 600098

- ▶ Two-way passive full range Loudspeaker built-in in ABS plastic, designed for the most diverse users.
- ▶ EVO series, delivers the sensitivity and bandwidth necessary for an efficient and natural response.
- ▶ Bring excellent output power for a maximum sound pressure level.
- ▶ Easy to carry them, extremely light & ideal for diverse indoor and outdoor places like pubs, clubs, concerts, karaoke, churches, small auditoriums and many other applications.
- ▶ Developed with quality materials this two-way system provides maximum power for any sound reinforcement situation.

SPECIFICATIONS

System: Passive Full Range Speaker

Ways: 2

RMS power: 350W

Program power: 700W

Peak power: 1400W

Material: ABS injection

Woofers: 15" (2.5" KVC)

Driver: 1" Titanium (1.75" VC)

Nominal dispersion: 90° x 60°

Nominal impedance: 8 ohm

Frequency response: 40Hz – 18KHz

Sensitivity: 96dB (@1W/1m)

SPL max: 125dB

Dimensions (WxDxH): 53x47.5x76.5 cm (20.9"x18.7"x30.1")





COD. 600096



COD. 600095



COD. 600094
W/ COD. 600099

LIGHT-WEIGHT AND
EASY TO TRANSPORT.



EVO-8PW
EVO-15PW

ALSO IN WHITE.

SPECIFICATIONS

EVO 12P


System: Passive Full Range Speaker
Ways: 2
RMS power: 250W
Program power: 500W
Peak power: 1000W
Material: ABS injection
Woofer: 12" (2" KVC)
Driver: 1" Titanium (1.44" VC)
Nominal dispersion: 90° x 60°
Nominal impedance: 8 ohm
Frequency response: 45Hz – 18KHz
Sensitivity: 94dB (@1W/1m)
SPL max: 122dB
Dimensions (WxDxH): 46x37.5x66 cm (18.1"x14.8"x26")

EVO 10P

System: Passive Full Range Speaker
Ways: 2
RMS power: 150W
Program power: 300W
Peak power: 600W
Material: ABS injection
Woofer: 10" (1.5" KVC)
Driver: 1" Titanium (1.44" VC)
Nominal dispersion: 90° x 60°
Nominal impedance: 8 ohm
Frequency response: 55Hz – 18KHz
Sensitivity: 92dB (@1W/1m)
SPL max: 120dB
Dimensions (WxDxH): 41x32.5x55.5 cm (16.1"x12.8"x21.9")

EVO 8P

System: Passive Full Range Speaker
Ways: 2
RMS power: 100W
Program power: 200W
Peak power: 400W
Material: ABS injection
Woofer: 8" (1.5" KVC)
Driver: 1" Titanium (1" VC)
Nominal dispersion: 90° x 60°
Nominal impedance: 8 ohm
Frequency response: 65Hz – 18KHz
Sensitivity: 92dB (@1W/1m)
SPL max: 125dB
Dimensions (WxDxH): 34.5x28x49 cm (13.6"x11"x19.3")

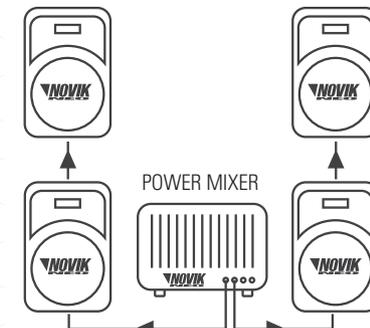

► Maximum number of speakers in parallel is 2 per powered mixer or amplified channel

PACKING INFO EVO 12P

MASTER DIMENSIONS:
460x375x655mm 18.1x14.8x25.8in

GROSS WEIGHT:
13.5 kg 29.76 lb

MASTER PIECES:
1 PCS

PACKING INFO EVO 10P

MASTER DIMENSIONS:
410x325x555mm 16.1x12.8x21.9in

GROSS WEIGHT:
10 kg 22.05 lb

MASTER PIECES:
1 PCS

PACKING INFO EVO 8P

MASTER DIMENSIONS:
340x280x480mm 13.4x11x18.9in

GROSS WEIGHT:
7.5 kg 16.53 lb

MASTER PIECES:
1 PCS

► Specifications subject to change without notice.

STREETSOUND V

PORTABLE ACTIVE P.A. SYSTEM

2 WAY 8" + 1" SPEAKER BOX

FEATURES

- Ultra-portable PA system
- Two way 8" Woofer
- Class D Amplifier
- 4 Mic-Line channel mixer
- USB/SD MP3 player (remote control)
- Bluetooth®
- 2 x 5 band graphic equalizer
- Effects processor
- Ergonomic handles for easy transportation

TECHNICAL SPECIFICATIONS

- Configuration: Portable PA System
- RMS Power: 160W + 160W
- Program power: 320W + 320W
- Peak Power: 640W + 640W
- Woofer Impedance 4 ohm
- Woofer Diameter: 8"
- Driver: 1" Titanium
- Frequency response: 60Hz - 18KHz
- Sensitivity: 94dB (@ 1W/1m)
- Max SPL: 122dB
- Power supply: AC 115V/230V - 60/50Hz.



COD. 6000498

PACKING INFO

MASTER DIMENSIONS:	830x370x775 mm 32.7x14.6x30.5 in
GROSS WEIGHT:	21 kg 46.30 lb
MASTER PIECES:	1 PCS

- STREETSOUND V takes your sound wherever you want.
- Design completely portable for transport to any space, live performances, street bands, entertainment, worship, clubs and more.
- This system offers all mix and playback options in one, 4 channels, USB, EQ, Bluetooth® combined with 2 way speakers 8" for maximum power and graphic equalizer for frequency adjustment according to the place you work.
- Class-D amplifier with 640W+640W Max. Power.



▶ OPEN VIEW

SNK-S2

SPEAKER STAND

COD. 6000038

PACKING INFO

MASTER DIMENSIONS:	365x315x830 mm 14.4x12.4x32.7 in
GROSS WEIGHT:	14.7kg 32 lb
MASTER PIECES:	4 PCS



EVOD BRAVERY 215

2 X 15" TWO WAY CLASS D POWERED LOUDSPEAKER

- ▶ The EVOD BRAVERY 215 powered loudspeaker is the best sounding, highest performance line of enclosures for clubs, touring bands, church, stage and professional sound companies.
- ▶ It is a 2 way, full range, class-D amplifier, incorporating 2 x 15" extra power woofer and one titanium diaphragm, Kapton coil, compression driver. You can have many features in only one speaker: mic/line input, USB, MP3 player, Bluetooth®, EQ.
- ▶ EVOD BRAVERY 215 has specially designed handles for easy movement and transportation so take your sound wherever you want.
- ▶ 1800W Max Power!



MAIN FEATURES

Bluetooth®
MP3 Player (with remote control)
USB/SD
Class D Amplifier
1800W peak power
MIC/Line Inputs
EQ (Treble/Bass)
Wheels and handles for easy transportation

SPECIFICATIONS

RMS Power: 450 W	Sensitivity: 97 dB
Program Power: 900 W	Impedance: 8 Ohm
Peak Power: 1800 W	Amplifier Type: Switch power supply Class-D
Woofer: 2x15", 50 oz, 2.5"VC	Power supply: AC 110V/220V - 60/50Hz.
Compression driver: 34mm, 1.35" VC	Dimensions: 19.5x16x45.3"
Frequency Response: 55Hz-20KHz	(495x405x1150mm)

COD. 6000500



PACKING INFO

MASTER DIMENSIONS:	495x405x1115 mm 19.5x15.9x43.89 in
GROSS WEIGHT:	27 kg 59.52 lb
MASTER PIECES:	1 PCS

▶ Specifications subject to change without notice.

EVOD BRAVERY 215

POWERED LOUDSPEAKER

EVO 410 HANDY

USB PORTABLE P.A. SYSTEM 2 WAY 10" SPEAKER BOX

Bluetooth®

- ▶ The EVO 410 HANDY is a modern portable sound system with 6 mix channels.
- ▶ Class D amp with 1200W peak power.
- ▶ It's a system designed to be used both in interior and exterior places. It also works remotely thanks to its removable module console.
- ▶ With EVO 410 HANDY you'll be ready to assemble your sound system anywhere, fast and simple.
- ▶ Bluetooth® connection.



COD. 6000499

FEATURES

Class D Amplifier	RMS Power 300W
6 channel mixing. 4 mono channels and 1 L+R stereo channel	Remote Control
MP3 Player USB/SD with LCD screen and digital player	Phantom Power in 4 XLR channels
Bluetooth®	Effect Processor with two modifiable parameters
2-band EQ per channel	Switching Power Supply
2 speaker 10"+1"	

Mic + cable and speaker cables included 





CONTROL SURFACE

▶ USB/SD/Bluetooth® Digital Player



▶ DSP EQ Preset



TECHNICAL SPECIFICATIONS

Configuration:	Portable PA System	Maximum Sound Pressure Level:	124dB
RMS Power:	150W + 150W	Woofer Impedance:	4 Ohm
Program Power:	300W + 300W	Woofer Diameter:	25.4cm (10")
Peak Power:	600W+600W	Coil:	Kapton VC 2"
Frequency Response:	55Hz – 20KHz	High Frequency Driver:	Titanium Diaphragm 25mm (1")
Sensitivity:	95dB (@1W/1m)	Polar Pattern:	Cardioid

Detachable Mixer



With MP3 Player Remote Control



PACKING INFO

MASTER DIMENSIONS:	640x370x550 mm 25.2x14.6x21.7 in
GROSS WEIGHT:	21 kg 46.30 lb
MASTER PIECES:	1 PCS

▶ Specifications subject to change without notice.

ROLLING SOUND

BATTERY POWERED PORTABLE ACTIVE SYSTEM

- ▶ 2-way Wireless System/MP3/USB/SD/Bluetooth®.
- ▶ All in one portable PA system.
Designed to take your sound anywhere unconnected with rechargeable battery, comfortable extendable handle and wheels for effortless transport.
- ▶ Bluetooth® connection and MP3 Player.
- ▶ Include high-quality VHF wireless microphones and an external Mic/Line input.

MAIN FEATURES

- 2-way portable powered system
- Operates on rechargeable battery
- SD/USB
- MP3/WMA/WAV Player
- Bluetooth®
- Extra Bass Woofer
- High Clarity Compression Driver
- LCD Display
- Connecting external 12V
- VHF Wireless Microphones
- External Microphone Input (Echo Control)
- Line Input
- Remote Control
- Compact system for easy and comfortable transportation with slide handle and wheels



 **Bluetooth®**

ROLLING SOUND 15BT



COD: 510133

Includes handle for comfort on the trip 



ROLLING SOUND 12BT



COD. 510132

ROLLING SOUND 10BT



COD. 510131

THERE IS NO LIMIT
 BATTERY
 POWERED!

Wireless Microphones


SPECIFICATIONS	15BT	12BT	10BT
RMS Power	100W	70W	50W
Program Power	200W	140W	100W
Peak Power	400W	280W	200W
Frequency response	75Hz - 18KHz	80Hz - 18KHz	85Hz - 18KHz
Sensibility	96dB	95dB	92dB
Woofers	15"	12"	10"
Driver	1" V.C.	1" V.C.	1" V.C.
Wireless Microphones	VHF x2	VHF x2	VHF x1
Wireless Microphone Battery	9V Battery	9V Battery	9V Battery
Polar Pattern	Cardioid	Cardioid	Cardioid
Maximum USB/SD capacity	32GB	32GB	32GB
Dimensions (HxWxD)	74.5x48x44cm (29x18.9x17")	63.5x41.5x37.5 (25x16x14.7")	56.5x38.5x32.5 (22.2x15.2x12.8")
Power supply	AC 110V/220V - 60/50Hz.	AC 110V/220V - 60/50Hz	AC 110V/220V - 60/50Hz
Additional Battery (Optional)	12V/7Ah	12V/7Ah	12V/2.2Ah
Power Consumption	180W	140W	100W



▶ 12BT / 10BT
 ▶ ROLLING SOUND

PACKING INFO 15BT
 MASTER DIMENSIONS: 745x480x440mm 29.3x18.9x17.3in
 GROSS WEIGHT: 20.5 kg 45.19 lb
 MASTER PIECES: 1 PCS
 PACKING INFO 12BT
 MASTER DIMENSIONS: 635x415x375mm 25x16.3x14.87in
 GROSS WEIGHT: 15.5 kg 34.17 lb
 MASTER PIECES: 1 PCS
 PACKING INFO 10BT
 MASTER DIMENSIONS: 565x385x325mm 22.2x15.2x12.8in
 GROSS WEIGHT: 6.8 kg 14.99 lb
 MASTER PIECES: 1 PCS

► Specifications subject to change without notice.

BIG BAND

POWERED LOUDSPEAKER MULTI-PURPOSE DESIGN



- ▶ Big Band, all the band in one! takes your sound where you want in high quality. Designed for the most complete musicians. If you want to be heard, Big Band is your choice. 2-way amplified system with extra bass woofer + 2 tweeters can have many features in the same box, mics, guitar, MP3 players Bluetooth®/USB/SD connection. NO LIMITS TO YOUR MUSIC!

MAIN FEATURES

Bluetooth®	Aux Input
USB/SD	3-Band EQ
FM Radio	Remote Control
LCD Display	Tweeter On/Off
Mic/Line Input X2	External Speaker Output
Guitar Input	FX Send And Return

▶ SIDE VIEW



Remote control



480W




COD. 6000045

320W



COD. 6000046

► CONNECTORS

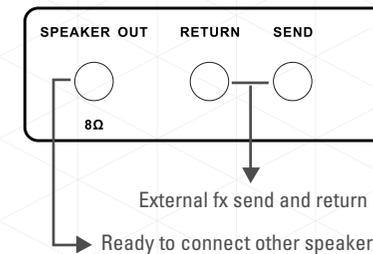

SPECIFICATIONS

	BIG BAND 12BT	BIG BAND 8BT
System:	Active Full Range Speaker	Active Full Range Speaker
Ways:	2	2
RMS power:	120W	80W
Program power:	240W	160W
Peak power:	480W	320W
Material:	MDF	MDF
Woofer:	12"	8"
Driver:	1"	1"
Frequency response:	50Hz – 18KHz	65Hz – 18KHz
Sensitivity:	95dB (@1W/1m)	92dB (@1W/1m)
SPL Max:	SPL max: 119dB	SPL max: 117dB
Mic / Guitar Input	Jack 1/4"	Jack 1/4"
AC Input:	115/230V ~ 60/50 Hz	115/230V ~ 60/50 Hz

PACKING INFO BIG BAND 12BT

MASTER DIMENSIONS: 430x595x290 mm
17x23.4x11.4 in

GROSS WEIGHT: 14.5 kg
31 lb

MASTER PIECES: 1 PCS

PACKING INFO BIG BAND 8BT

MASTER DIMENSIONS: 258x357x174 mm
10x14x6.8 in

GROSS WEIGHT: 8 kg
19.8 lb

MASTER PIECES: 1 PCS

► 12BT / 8BT

► BIG BAND

► Specifications subject to change without notice.

BIG BAND

POWERED LOUDSPEAKER MULTI-PURPOSE DESIGN

- ▶ Big Band, all the band in one! takes your sound where you want in high quality. Designed for the most complete musicians. If you want to be heard, Big Band is your choice. 2-way amplified system with extra bass woofer + 2 tweeters can have many features in the same box, mics, guitar, MP3 players Bluetooth®/USB/SD connection. NO LIMITS TO YOUR MUSIC!

MAIN FEATURES

Bluetooth®	Aux Input
USB/SD	3-Band EQ
FM Radio	Remote Control
LCD Display	Tweeter On/Off
Mic/Line Input X2	External Speaker Output
Guitar Input	FX Send And Return

Remote control



COD. 6000045



480W



COD. 6000046



320W

SPECIFICATIONS

	BIG BAND 12BT	BIG BAND 8BT
System:	Active Full Range Speaker	Active Full Range Speaker
Ways:	2	2
RMS power:	120W	80W
Program power:	240W	160W
Peak power:	480W	320W
Material:	MDF	MDF
Woofer:	12"	8"
Driver:	1"	1"
Frequency response:	50Hz – 18KHz	65Hz – 18KHz
Sensitivity:	95dB (@1W/1m)	92dB (@1W/1m)
SPL Max:	SPL max: 119dB	SPL max: 117dB
Mic / Guitar Input	Jack 1/4"	Jack 1/4"
AC Input:	115/230V ~ 60/50 Hz	115/230V ~ 60/50 Hz

▶ Specifications subject to change without notice.

PACKING INFO BIG BAND 12BT

MASTER DIMENSIONS:	430x595x290 mm 17x23.4x11.4 in
GROSS WEIGHT:	14.5 kg 31 lb
MASTER PIECES:	1 PCS

PACKING INFO BIG BAND 8BT

MASTER DIMENSIONS:	258x357x174 mm 10x14x6.8 in
GROSS WEIGHT:	8 kg 19.8 lb
MASTER PIECES:	1 PCS

INFINITY 8

SOUNDBAR

SUBWOOFER SYSTEM



COD. 6000729



**150w
RMS**



MAIN FEATURES

- REMOTE CONTROL
- USB INPUT
- 360° SURROUND SOUND
- DEEPER BASS SOUND
- AUX INPUT
- CINEMA SOUND

SPECIFICATIONS

- 2.1 Amplified system
 - Input for USB memory
 - Bluetooth®
 - Mp3 player
 - Auxiliary line input
 - Subwoofer output
 - Digital 2-band equalizer
 - Remote control
 - Driver: 2.25" x 2
 - Subwoofer: 5.25"
- Frequency response:
- Soundbar: 110Hz – 20KHz
 - Subwoofer: 20Hz – 150Hz
 - Signal to Noise ratio: >40dB
 - Distortion: <1%
 - Power Supply: AC 110-220V-60/50Hz 44W
- DIMENSIONS:
- Soundbar: W817 x H65 x D68mm
 - Subwoofer: W166 x H304 x D318mm



PACKING INFO SOUNDBAR

MASTER DIMENSIONS: 900x410x280mm 35.4x16.1x11in
GROSS WEIGHT: 13.28 kg 29.27 lb
MASTER PIECES: 6 PCS

PACKING INFO SUBWOOFER

MASTER DIMENSIONS: 737x634x383mm 29x24.9x15.07in
GROSS WEIGHT: 21.14 kg 46.7 lb
MASTER PIECES: 6 PCS

- UHF Wireless Microphone System masters the high pressure and extreme conditions of touring or installations environments while delivering uncompromising sound.
- Multilevel quiet control circuit, to avoid interference signal from outside open the mute system.
- Special voice compress-limiter design, it will not crack though the singer sang very loudly.
- Excellent cardioid dynamic polar pattern reduces feedback, bright and clear timbre.
- The UNK line, used the range from 500-900MHz band frequencies to prevent possible interference.
- High gain antenna, the space availability is more than 50 meters at the clearing.
- It is suitable for small and large stages, ballrooms, auditoriums, classrooms and churches.



▶ Exclusive & customized easy-to-carry plastic case.

UNK 600

DUAL 99 CHANNELS PROFESSIONAL WIRELESS MICROPHONE SYSTEM

- ▶ A specially designed circuit switch is on the phone. It is for clearing up waves.
- ▶ Robust design construction reduces handling noise.
- ▶ Using multilevel high frequency and a mid frequency narrowband filter, so as to dispel any possible interference signals.
- ▶ LCD Display.



SPECIFICATIONS

Available frequency band: UHF 700-900 MHz

Receiver:	Handling microphone:	Comprehensive performance:
Power supply: DC 17V	Transmitter power: 8.5 mW	Frequency stabilization: $\pm 30\text{ppm}$
Consumption power: 4W	Modulation type: fm, f3f	Dynamic range: >90dB
Signal/noise ratio: >90dB	Max deviation: +25KHz	Total harmonic distortion: <math>< 0.5\%</math>
Image & spurious rejection: >80dB	Spurious emission: >40dB (with carrier)	Frequency response: 40Hz-15KHz (+-3dB)
Border upon channel rejection: >80dB	Battery voltage: 1.5V x2	Audio output level: +400mV
Receiving sensitivity: 10dBuV (Sinad=30dB)	Continuous use: 6 hours	
De-emphasis: 50us		

PACKING INFO UNK 600 MASTER DIMENSIONS: 490x400x370 mm 19.3x15.7x14.6 in GROSS WEIGHT: 14 kg 30.86 lb MASTER PIECES: 5 PCS

CCD. 6000209

▶ Specifications subject to change without notice.

UNK 500

16 X 2 CHANNEL UHF PROFESSIONAL WIRELESS MICROPHONE SYSTEM

- ▶ Dual channel design. Up to 2 microphones can be used at the same time.
- ▶ Microprocessor control for an ultra-easy operation.
- ▶ PLL system. 16 channels presets without interference.
- ▶ Latest SAW filter to reduce RF out-band interference.
- ▶ Capsule designed to reduce feedback.



COD. 6000202



SPECIFICATIONS

Available frequency band: UHF 700-870 MHz

Receiver:	Handling microphone:	Comprehensive performance:
Power supply: DC 17V	Transmitter power: 8.5 mW	Frequency stabilization: $\pm 30\text{ppm}$
Consumption power: 4W	Modulation type: fm, f3f	Dynamic range: >90dB
Signal/noise ratio: >90dB	Max deviation: $\pm 25\text{KHz}$	Total harmonic distortion: <math>< 0.5\%</math>
Image & spurious rejection: >80dB	Spurious emission: >40dB (with carrier)	Frequency response: 40Hz-15KHz ($\pm 3\text{dB}$)
Border upon channel rejection: >80dB	Battery voltage: 1.5V x2	Audio output level: $\pm 400\text{mV}$
Receiving sensitivity: 10dBuV (Sinad=30dB)	Continuous use: 20 hours	
De-emphasis: 50us		

 PACKING INFO UNK 500

MASTER DIMENSIONS: 358x365x625 mm 14x14.4x24.6 in
GROSS WEIGHT: 16 kg 35.27 lb
MASTER PIECES: 8 PCS

▶ Specifications subject to change without notice.

UNK 450

TWIN CHANNEL PROFESSIONAL WIRELESS MICROPHONE SYSTEM

- ▶ Choose excellent chipset and high quality component, so that timbre is very good.
- ▶ All use quartz crystal oscillating circuits, so the frequency is very steady.
- ▶ Volt indicating circuit in the microphone. It can tell you if it is necessary to change the battery.



SPECIFICATIONS

Available frequency band: UHF 480-600 MHz

COD. 6000223

Receiver:	Handling microphone:	Comprehensive performance:
Power supply: DC 17V	Frequency range 470-558MHz	Frequency stabilization: <+30ppm
Consumption power: 5W	Transmitter power: 30 mW	Dynamic range: >90dB
Signal/noise ratio: >90dB	Modulation type: fm,f3f	Total harmonic distortion: <0.5%
Image & spurious rejection: >80dB	Max deviation: +25KHz	Frequency response: 40Hz-15KHz +3dB
Border upon channel rejection: >80dB	Spurious emission: >40dB with carrier	Audio output level: +800mV
Receiving sensitivity: 5dBuV Sinad=30dB	Battery voltage: 1.5V x2	
De-emphasis: 50us	Continuous use: 10 hours	

▶ PACKING INFO UNK 450

MASTER DIMENSIONS: 595x408x380mm 23.4x16.1x15in
GROSS WEIGHT: 21 kg 46.30 lb
MASTER PIECES: 10 PCS



▶ Specifications subject to change without notice.

UNK 300

UHF WIRELESS MICROPHONE SYSTEM

- ▶ UNK 300 is a UHF which uses a frequency range 620-865MHz to avoid interference and maintain interruption-free transmission.
- ▶ Reduced receiver to be maneuvered easily and take up little space on the sound system, ensures signal reception for more than 40m (150 ft) away.
- ▶ The handheld is a dynamic microphone, it has a cardioid polar pattern that reduces to the minimum the feedback possibility and off-axis sounds, rugged construction and on/off switch.
- ▶ This receptor is compatible with Headset UNK 320 and Lavalier UNK 350.




UNK 320 UNK 350



SPECIFICATIONS

Receiver:	Handling microphone:	Comprehensive performance:
Power supply: DC 12V	Transmitter power: 10 mW	Carrier frequency: UHF 620-865MHz
Consumption power: 4W	Modulation type: fm, f3f	Frequency stabilization: 100ppm
Signal/noise ratio: >85dB	Max deviation: +38KHz	Dynamic range: >80dB
Image & spurious rejection: >100dB	Spurious emission: >40dB (with carrier)	Total harmonic distortion: <0.8%
Border upon channel rejection: >80dB	Battery voltage: 1.5V x2	Frequency response: 80Hz-14KHz (+3dB)
Receiving sensitivity: -98dB (Sinad=12dB)	Working distance: >150 feet ideal	Audio output level: +400mV
De-emphasis: 50us	Continuous use: 8 hours	

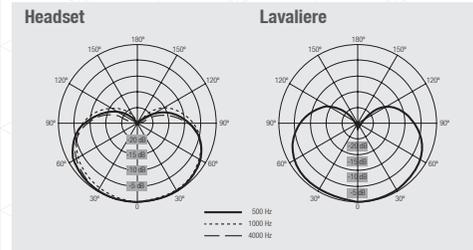

PACKING INFO UNK 300
 MASTER DIMENSIONS: 595x408x380mm 23.4x16.1x15in
 GROSS WEIGHT: 21 kg 46.30 lb
 MASTER PIECES: 10 PCS
 PACKING INFO UNK 320
 MASTER DIMENSIONS: 595x408x380mm 23.4x16.1x15in
 GROSS WEIGHT: 21 kg 46.30 lb
 MASTER PIECES: 10 PCS
 PACKING INFO UNK 350
 MASTER DIMENSIONS: 595x408x380mm 23.4x16.1x15in
 GROSS WEIGHT: 21 kg 46.30 lb
 MASTER PIECES: 10 PCS

▶ Specifications subject to change without notice.

▶ UNK-300 / UNK-320 / UNK-350

▶ UHF WIRELESS MICROPHONE SYSTEM

VNK 150

TRUE DIVERSITY PROFESSIONAL WIRELESS MICROPHONE SYSTEM

- ▶ Using multilevel high frequency and mid frequency narrowband filter, so as to dispel any possible interference signals.
- ▶ Diversity receiver, these transmission system ensure interference-free transmission and minimize dropouts in the RF link, avoid the dead angle.
- ▶ Special designed circuit on the microphone for clearing up waves of miscellaneous signals.
- ▶ With audio compressing-expanding technology, the machine can lower noise and increase the dynamic range. It can also lower re-echo.
- ▶ Using VHF 200-270 MHz band to avert interference frequency.
- ▶ There is a volt indication circuit in the microphone which can tell you if it is necessary to change the battery.
- ▶ Longest distance in open: 50m (164ft)

SPECIFICATIONS

Available frequency band: VHF 200~270MHz

Receiver:	Handling microphone:	Comprehensive performance:
Power supply: DC 17V	Transmitter power: 8.5 mW	Carrier frequency: VHF 200~270MHz
Consumption power: 4W	Modulation type: fm,f3f	Frequency stabilization: <+30ppm
Signal/noise ratio: >90dB	Max deviation: +25KHz	Dynamic range: >90dB
Image & spurious rejection: >80dB	Spurious emission: >40dB with carrier	Total harmonic distortion: <0.5%
Border upon channel rejection: >80dB	Battery voltage: 1.5V x3	Frequency response: 40Hz-15KHz +3dB
Receiving sensitivity: 10dBuV Sinad=30dB	Continuous use: 6 hours	Audio output level: +400mV
De-emphasis: 50us	Noise control: perfectness circuit for eliminating noises	

PACKING INFO VNK 200

MASTER DIMENSIONS:
630x372x400mm 24.8x14.6x15.7in

GROSS WEIGHT: 11 kg 24.25 lb
MASTER PIECES: 10 PCS

PACKING INFO VNK 150

MASTER DIMENSIONS:
630x372x400mm 24.8x14.6x15.7in

GROSS WEIGHT: 12 kg 26.46 lb
MASTER PIECES: 10 PCS

VNK 200

Headset & Lavalier

COD. 6000201



COD. 6000222



FNK 10

CARDIOID CONDENSER GOOSENECK MICROPHONE

- ▶ The FNK 10 gooseneck – mounted is a professional condenser microphone designed primarily for speech and vocal pickup.
- ▶ They can be mounted on lecterns, pulpits, conference tables and much more.
- ▶ Single gooseneck section near microphone base for easy orientation of the microphone.
- ▶ XLR connector with phantom power or two double A batteries can bring power for the red LED ring and the microphone signal.
- ▶ Streamlined design for seamless integration, the gooseneck's slender design is far less obstructive than a traditional microphone setup.
- ▶ Includes foam windscreen to prevent unwanted noise.

FEATURES

- Cardioid polar pattern for easy adaption to any situation
- Condenser microphone
- Easy to assembly with battery support
- On/Off switch
- Status LED
- Cable included
- Strong and stable support




COD. 6000203

PACKING INFO FNK 10

MASTER DIMENSIONS:	450x410x415 mm 17.7x16.1x16.3 in
GROSS WEIGHT:	10.6 kg 20.37 lb
MASTER PIECES:	10 PCS

FIG. 1: XLR Cable
FIG. 2: Status LED
FIG. 3: XLR Socket
FIG.4: Ultra flexible neck

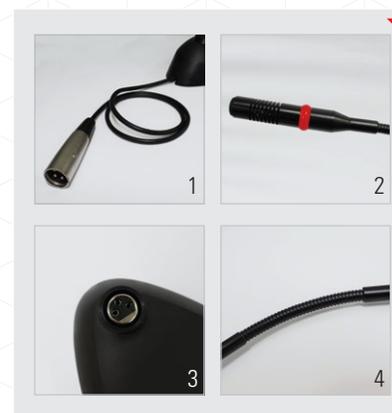

SPECIFICATIONS

Type:	Condenser
Frequency response:	60Hz – 18KHz
Output impedance:	600 Ohm
Sensitivity:	-56dB +/- 3dB
Battery:	3V DC
Directivity:	Directional (Cardioid)
Max SPL:	128dB (1 KHz)
S/N rate:	63dB
Dynamic range:	99dB

▶ Specifications subject to change without notice.


PROFESSIONAL DYNAMIC MICROPHONE

FNK 840

- ▶ FNK 840 is a dynamic microphone specially designed to lead vocals. Rugged construction and super cardioid polar pattern make it the best choice for any live performance situation.
- ▶ This super cardioid microphone rejects all feedback and ambient noise.
- ▶ Metal body resistant to any use, designed to reduce noise provoked by sudden movements.
- ▶ The package includes clip and cable.



COD. 6000212



SPECIFICATIONS

Type: Dynamic
Directivity: Unidirectional
Polar Pattern: Cardioid
Frequency response: 50Hz – 15KHz
Output impedance: 600Ω
Sensitivity: -72dB
Body: Metal
Cable: 16.4ft / 5m
Connector: XLR / Cable: XLR



PACKING INFO FNK 840


MASTER DIMENSIONS: 475x348x360mm 18.7x13.7x14.2inc
GROSS WEIGHT: 18 kg 39.68 lb
MASTER PIECES: 20 PCS

FNK 580

- ▶ The FNK 580 is an unidirectional dynamic microphone with a frequency response designed to obtain a clear and loud sound, it is ideal for the sound of the live vocals and instruments.
- ▶ Cardioid polar pattern isolates the main sound source and reduces background noise.
- ▶ With a metal body is resistant to any use, and designed construction to reduce noise induced by sudden movements.
- ▶ The package includes clip and cable.



COD. 6000211

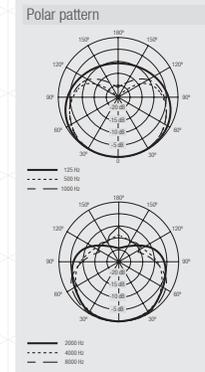

SPECIFICATIONS

Type: Dynamic
Directivity: Unidirectional
Polar Pattern: Cardioid
Frequency response: 50Hz – 15KHz
Output impedance: 600Ω
Sensitivity: -72dB
Body: Metal
Cable: 16.4ft / 5m
Connector: XLR / Cable: XLR-Plug 1/4"



▶ Made in Germany capsule.

PACKING INFO FNK 580

MASTER DIMENSIONS: 475x348x360mm 18.7x13.7x14.2inc
GROSS WEIGHT: 16.5 kg 36.38 lb
MASTER PIECES: 20 PCS

SNK-M1 MICROPHONE STAND

COD. 6000039



PACKING INFO

MASTER DIMENSIONS: 310x210x830 mm 12.2x8.3x32.7 in
GROSS WEIGHT: 11.5 kg 25 lb
MASTER PIECES: 6 PCS

PROFESSIONAL DYNAMIC MICROPHONE


FNK 40XLR

COD. 6000205

- ▶ FNK 40XLR is a dynamic microphone designed to multi-use applications.
- ▶ Cardioid polar pattern with body designed to reject off-axis sound.
- ▶ On/off convenient switch.
- ▶ Metal body is resistant to any use.
- ▶ The package includes clip and cable.



▶ Made in Germany capsule.

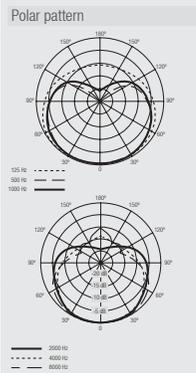

SPECIFICATIONS

Type: Dynamic
 Directivity: Unidirectional
 Polar Pattern: Cardioid
 Frequency response: 60Hz – 15KHz
 Output impedance: 600Ω
 Sensitivity: -72dB
 Body: Metal
 Cable: 15ft / 4.5m
 Connector: XLR / Cable: XLR

PACKING INFO FNK 40XLR MASTER DIMENSIONS: 475x348x360mm 18.7x13.7x14.2in GROSS WEIGHT: 26 kg 57.32 lb MASTER PIECES: 20 PCS


FNK 30

COD. 6000204

- ▶ FNK 30 is a dynamic microphone designed for any situation in which sound reinforcement is required.
- ▶ Cardioid polar pattern to capture with higher directivity.
- ▶ On/off convenient switch.
- ▶ Metal body resistant to any use, both indoor and outdoor.
- ▶ The package includes clip and cable.



▶ Made in Germany capsule.

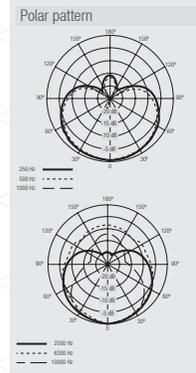

SPECIFICATIONS

Type: Dynamic
 Directivity: Unidirectional
 Polar Pattern: Cardioid
 Frequency response: 60Hz – 14KHz
 Output impedance: 600Ω
 Sensitivity: -72dB
 Body: Metal
 Cable: 15ft / 4.5m
 Connector: XLR / Cable: XLR-Plug 1/4"

PACKING INFO FNK 30 MASTER DIMENSIONS: 475x348x360mm 18.x13.7x14.2in GROSS WEIGHT: 20.7 kg 45.64 lb MASTER PIECES: 20 PCS


FNK 5

COD. 6000207

- ▶ FNK 5 is a dynamic microphone designed to multi-use applications.
- ▶ Dynamic microphone, with cardioid polar pattern.
- ▶ On/off convenient switch.
- ▶ Metal body, resistant to any use and easy manipulation.
- ▶ The package includes clip and cable.



▶ Made in Germany capsule.

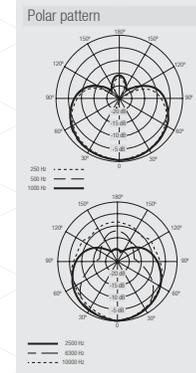

SPECIFICATIONS

Type: Dynamic
 Directivity: Unidirectional
 Polar Pattern: Cardioid
 Frequency response: 50Hz – 15KHz
 Output impedance: 600Ω
 Sensitivity: -72dB
 Body: Metal
 Cable: 15ft / 4.5m
 Connector: XLR / Cable: XLR-Plug 1/4"

PACKING INFO FNK 5 MASTER DIMENSIONS: 445x405x350mm 17.5x15.9x13.8in GROSS WEIGHT: 23.8 kg 52.47 lb MASTER PIECES: 40 PCS

PROFESSIONAL DYNAMIC MICROPHONE

CONCERT MKII

NEAR FIELD STUDIO MONITOR

POWERED SERIES / BI-AMPLIFIED FULL-RANGE

The CONCERT MKII Active Studio Monitors are great for mixing music in your DAW Software, editing video, or any other task requires precise, accurate, detailed sound.

MAIN FEATURES

- Ideal for Mixing, Mastering and Recording
- Double precision amplifier
- Kevlar woofer for defined lows
- Silk Tweeter and waveguide for clear highs
- Port tuning. This port has been carefully designed to produce a precise reproduction of bass frequencies
- Balanced inputs
- Input Level Control



LOW FREQUENCY PORT

Specifically designed to obtain deep and defined bass, each port is calibrated by our engineers, to be the perfect woofer complement, achieving an extensive frequency response and reduced turbulence. Design, engineering and technology for the modern sound engineer.



SPECIFICATIONS

CONCERT 6 MKII

COD. 600004

CONCERT 5 MKII

COD. 600003

RMS Power:	100W	90W
HF Power:	30W	30W
LF Power:	70W	60W
Frequency response (-3dB):	45Hz - 22Khz	56Hz - 22Khz
LF Woofer:	6" KSV	5" KSV
Woofer Material:	Kevlar	Kevlar
Voice coil:	1"	1" KSV 3.6 Ω
HF Tweeter:	Silk Dome	Silk Dome
Input:	XLR + TRS	XLR + TRS
Dimensions (H x W x D):	316 x 226 x 254 (mm)	271 x 183 x 224 (mm)
	12.4 x 8.9 x 10 (inches)	10.7 x 7.2 x 8.2 (inches)
Material:	MDF	MDF
Supply Voltage:	110/220V-60/50Hz	110/220V-60/50Hz
Power Consumption	200W	180W

CONCERT 8

CONCERT SERIES

www.novikneo.com

50

PACKING INFO CONCERT 6

MASTER DIMENSIONS:
432x313x342mm 17x12.3x13.5in

GROSS WEIGHT: 14.4 kg 31.75 lb
MASTER PIECES: 1 PCS

PACKING INFO CONCERT 5

MASTER DIMENSIONS:
385x264x302mm 15.2x10.4x11.9in

GROSS WEIGHT: 11.2 kg 24.69 lb
MASTER PIECES: 1 PCS

► Specifications subject to change without notice.

HNK-402

PROFESSIONAL REFERENCE STUDIO HEADPHONES

The HNK-402 are perfect for all type of monitoring, DJ and general high fidelity music listening. Large 50mm diaphragms and open air design provides a specific frequency response and improved bass. Features include a wide self-adjusting headband, 3m extended cord, over ear design, 1/8" jack stereo connector with 1/4" adapter included.



COD. 6000250

FEATURES

- Diaphragm: 50mm full range
- Max Power: 1200mW
- Impedance: 32Ω
- Frequency Response: 15Hz - 25KHz
- Sensitivity: 95dB
- Cable length: 3m 9.8'
- Connector: 3.5mm +6.3mm

FNK-02U

USB STUDIO CONDENSER MICROPHONE

The FNK-02U is a professional USB STUDIO CONDENSER MICROPHONE, designed to be used in different situations that demand a flat frequency response, low distortion and clarity sound. This products includes a USB cable and swivel stand mount.



COD. 6000211

FEATURES

- Element: Condenser
- Polar Pattern: Cardioid
- Frequency Response: 30Hz-18KHz
- Sensitivity: -34dB
- Output Impedance: 100Ω
- Load Impedance: ≥ 1000Ω
- Self Noise: 16dB A
- SPL Max: 132dB
- S/N Ratio: 78dB

MEGAPHONES

SAY IT OUT LOUD!

NK-226S

15HS SPEAKING TIME

- 5W Power
- 350m (1148.3ft) Open Field
- 300m (984.25ft) In City
- Built-in Sirent



COD. 6000601

SPECIFICATIONS

Diameter: 237 mm (9.3")
Mouth: 150 mm (5.9")
Power: 5W
Power Supply: UM-3 (AA) x 6u (not supplied)
Battery use: 15 hours (intermittent use)
Weight: 620 grs (1.37 lb)
Range: 350m (1148.3ft) open field / 300m (984.25ft) in-city

PACKING INFO NK-226S

531x374x568mm 20.9x14.7x22.4in 1194 kg 26.32lb 12 PCS

MASTER DIMENSIONS: GROSS WEIGHT: MASTER PIECES: 12 PCS

NK-66S

15HS SPEAKING TIME

- 25W Power
- 1000m (3280.8ft) Open Field
- Shoulder Strap
- Built-in Siren



COD. 6000603

SPECIFICATIONS

Diameter: 340 mm (13.4")
Mouth: 230 mm (9")
Power: 25W MAX
Power Supply: UM-2 (C) x 8u (not supplied)
Battery use: 15 hours (intermittent use)
Weight: 1650 grs (3.64 lb)
Range: 1000m (3280.8ft) open field / 500m (1640.4ft) in-city

PACKING INFO NK-66S

386x506x751mm 15.2x19.9x29.6in 14.1 kg 31.09 lb 6 PCS

MASTER DIMENSIONS: GROSS WEIGHT: MASTER PIECES: 6 PCS

NK-55S

15HS SPEAKING TIME

- 25W Power
- 1200m (3937ft) Open Field
- 600m (1968.5ft) In City
- Built-in Siren



COD. 6000602

SPECIFICATIONS

- Diameter: 340 mm (13.4")
- Mouth: 230 mm (9")
- Power: 25W MAX
- Power Supply: UM-2 (C) x 8u (not supplied)
- Battery use: 15 hours (intermittent use)
- Weight: 1650 grs (3.64 lb)
- Range: 1200m (3937ft) open field / 600m (1968.5ft) in-city

PACKING INFO NK-55S MASTER DIMENSIONS: GROSS WEIGHT: MASTER PIECES: 416x506x751mm 16.4x19.9x29.6in 13.78kg 30.38lb 6 PCS

NK-44SD

10HS SPEAKING TIME

- ▶ SD MEMORY
- ▶ REC FUNCTION

- 10W Power
- Built-in Sirent



SD MEMORY/REC

COD. 6000605

SPECIFICATIONS

- Diameter: 310 mm (12.2")
- Mouth: 185 mm (7.3")
- Power: 10W
- Power Supply: UM-3 (AA) x 6u (9V DC)
- Battery use: 15 hours (intermittent use)
- Weight: 900 grs (1.98 lb)
- Range: 500m (1640.4ft) open field / 300m (984.25ft) in-city

PACKING INFO NK-44SD MASTER DIMENSIONS: GROSS WEIGHT: MASTER PIECES: 350x471x691mm 138x185x272in 9.06kg 16.97lb 6 PCS

NK-3S

10HS SPEAKING TIME

- 10W Power
- 450m (1476.4ft) Open Field
- 250m (820.21ft) in-city



COD. 6000604

SPECIFICATIONS

- Diameter: 310 mm (12.2")
- Mouth: 185 mm (7.3")
- Power: 10W
- Power Supply: UM-3 (AA) x 6u (not supplied)
- Battery use: 10 hours (intermittent use)
- Weight: 900 grs (1.98 lb)
- Range: 450m (1476.4ft) open field / 250m (820.21ft) in-city

PACKING INFO NK-3S MASTER DIMENSIONS: GROSS WEIGHT: MASTER PIECES: 350x471x691mm 138x185x272in 9.06kg 16.97lb 6 PCS

▶ Specifications subject to change without notice.

WOOFERS

LOW SOUND

- ▶ The NOVIK professional subwoofers offer a perfect combination of power handling & deep bass and mid-bass, making it ideal for cabinet installation.
- ▶ The neodymium magnet system, manufactured exclusively by NOVIK, creates a motor of power.
- ▶ By using a large Kapton voice coil to support a large area of the Cloth Edge shallow cone, the profile of the woofer remains low and core breakup distortion at high level is prevented.
- ▶ These subwoofers are rear vented making use of NOVIK advance controlled acoustic resistance filter that improves the acoustics by controlling the cone movement.



W/PW 18450



PROGRAM 900W

COD. 6000130

SPECIFICATIONS

Cloth-Edge paper cone Impedance: 8 Ohm
Magnet: 100oz SPL: 99dB/W/M
Voice coil: 4"KSV RMS power: 450W

18"



PACKING INFO MASTER DIMENSIONS: GROSS WEIGHT: MASTER PIECES:
515x515x240mm 20.3x20.3x9.4in 12.5 kg 27.56 lb 1 PCS

W/PW 15400



PROGRAM 800W

COD. 6000129

SPECIFICATIONS

Cloth-Edge paper cone Impedance: 8 Ohm
Magnet: 100oz SPL: 98dB/W/M
Voice coil: 4"KSV RMS power: 400W

15"



PACKING INFO MASTER DIMENSIONS: GROSS WEIGHT: MASTER PIECES:
425x425x185mm 16.7x16.7x7.3in 11 kg 24.25 lb 1 PCS

W/PW 12350



PROGRAM 700W

COD. 6000128

SPECIFICATIONS

Cloth-Edge paper cone Impedance: 8 Ohm
Magnet: 100oz SPL: 97dB/W/M
Voice coil: 4"KSV RMS power: 350W

12"



PACKING INFO MASTER DIMENSIONS: GROSS WEIGHT: MASTER PIECES:
340x340x185mm 13.4x13.4x7.3in 11 kg 24.25 lb 1 PCS

WOW 18300



PROGRAM 600W

COD. 6000127

SPECIFICATIONS

Cloth-Edge paper cone Impedance: 8 Ohm
Magnet: 70oz SPL: 96dB/W/M
Voice coil: 3"ASV RMS power: 300W

18"

PACKING INFO MASTER DIMENSIONS: GROSS WEIGHT: MASTER PIECES:
485x485x325mm 19.1x19.1x12.8in 8 kg 17.64 lb 1 PCS

WOW 15250



PROGRAM 500W

COD. 6000126

SPECIFICATIONS

Cloth-Edge paper cone Impedance: 8 Ohm
Magnet: 50oz SPL: 94dB/W/M
Voice coil: 3"ASV RMS power: 250W

15"

PACKING INFO MASTER DIMENSIONS: GROSS WEIGHT: MASTER PIECES:
405x405x325mm 15.9x15.9x12.8in 5.2 kg 11.46 lb 1 PCS

WOW 12180



PROGRAM 360W

COD. 6000124

SPECIFICATIONS

Cloth-Edge paper cone Impedance: 8 Ohm
Magnet: 40oz SPL: 92dB/W/M
Voice coil: 2"ASV RMS power: 180W

12"

PACKING INFO MASTER DIMENSIONS: GROSS WEIGHT: MASTER PIECES:
350x350x325mm 13.8x13.8x12.8in 7.3 kg 16.09 lb 1 PCS

WOW 15150



PROGRAM 300W

COD. 6000125

SPECIFICATIONS

Cloth-Edge paper cone Impedance: 8 Ohm
Magnet: 30oz SPL: 92dB/W/M
Voice coil: 2"ASV RMS power: 150W

15"

PACKING INFO

MASTER DIMENSIONS: GROSS WEIGHT: MASTER PIECES: *
405x405x325mm 15.9x15.9x12.8in 3.4 kg 7.5 lb 1 PCS

WOW 12120



PROGRAM 240W

COD. 6000123

SPECIFICATIONS

Cloth-Edge paper cone Impedance: 8 Ohm
Magnet: 30oz SPL: 92dB/W/M
Voice coil: 1.5"ASV RMS power: 120W

12"

PACKING INFO

MASTER DIMENSIONS: GROSS WEIGHT: MASTER PIECES: *
350x350x325mm 13.8x13.8x12.8in 5.9 kg 13.01 lb 2 PCS

WOW 10120



PROGRAM 240W

COD. 6000122

SPECIFICATIONS

Cloth-Edge paper cone Impedance: 8 Ohm
Magnet: 40oz SPL: 90dB/W/M
Voice coil: 2"ASV RMS power: 120W

10"

PACKING INFO

MASTER DIMENSIONS: GROSS WEIGHT: MASTER PIECES: *
575x295x285mm 22.6x11.6x11.2in 12.7 kg 28.00 lb 4 PCS

WOW 8100



PROGRAM 200W

COD. 6000121

SPECIFICATIONS

Cloth-Edge paper cone Impedance: 8 Ohm
Magnet: 40oz SPL: 90dB/W/M
Voice coil: 2"ASV RMS power: 100W

8"

PACKING INFO

MASTER DIMENSIONS: GROSS WEIGHT: MASTER PIECES: *
460x240x265mm 18.1x9.4x10.4in 11.4 kg 25.13 lb 4 PCS

WOW 6570



PROGRAM 140W

COD. 6000120

SPECIFICATIONS

Cloth-Edge paper cone Impedance: 8 Ohm
Magnet: 30oz SPL: 87dB/W/M
Voice coil: 1.5"ASV RMS power: 70W

6,5"

PACKING INFO

MASTER DIMENSIONS: GROSS WEIGHT: MASTER PIECES: *
580x205x225mm 22.8x8.1x8.9in 11.8 kg 26.01 lb 6 PCS

► Specifications subject to change without notice.

DRIVERS

HF COMPRESSION DRIVERS

- ▶ When choosing a compression driver for a cabinet or sound system, NOVIK NEO provides the best solution of high quality, ensuring an extended frequency response in high and mid-high.
- ▶ DRK line offers high sensibility and low distortion.
- ▶ Built with Titanium diaphragm, it achieves a clear and crystal sound.
- ▶ All line products are recommended for PA systems, monitors, car audio and other applications.
- ▶ Maximum performance and SPL.

DRK 125

DRK 1540

DRK 2060

DRK 3100



COD. 6000022

FRONT VIEW

SPECIFICATIONS

Driver: 1"
Voice coil: 1" (25mm)
Magnet: 8oz
Peak power: 100W
RMS power: 25W
Impedance: 8 Ohm
Frequency response: 1.5KHz – 18KHz
Sensitivity (SPL): 103dB
Diaphragm material: Titanium

MASTER DIMENSIONS: GROSS WEIGHT: MASTER PIECES:
395x190x150mm 15.6x7.5x5.9in 9.7 kg 21.38 lb 20 PCS

RK125

Replacement diaphragm
Voice coil: 1" (25mm)
Diaphragm material: Titanium
Impedance: 8 Ohm

MASTER DIMENSIONS: GROSS WEIGHT: MASTER PIECES:
405x395x150mm 15.6x7.5x5.9in 5 kg 11.02 lb 300 PCS

COD. 6000023

FRONT VIEW

SPECIFICATIONS

Driver: 1"
Voice coil: 1.44" (34mm)
Magnet: 12.50oz
Peak power: 160W
RMS power: 40W
Impedance: 8 Ohm
Frequency response: 1.5KHz – 18KHz
Sensitivity (SPL): 105dB
Diaphragm material: Titanium

MASTER DIMENSIONS: GROSS WEIGHT: MASTER PIECES:
305x210x190mm 12x8.3x7.5in 10 kg 22.05 lb 12 PCS

RK1540

Replacement diaphragm
Voice coil: 1.44" (34mm)
Diaphragm material: Titanium
Impedance: 8 Ohm

MASTER DIMENSIONS: GROSS WEIGHT: MASTER PIECES:
405x395x150mm 15.6x7.5x5.9in 5 kg 11.02 lb 300 PCS

COD. 6000024

FRONT VIEW

SPECIFICATIONS

Driver: 1"
Voice coil: 1.75" (44mm)
Magnet: 20oz
Peak power: 240W
RMS power: 60W
Impedance: 8 Ohm
Frequency response: 800Hz – 18KHz
Sensitivity (SPL): 107dB
Diaphragm material: Titanium

MASTER DIMENSIONS: GROSS WEIGHT: MASTER PIECES:
375x260x100mm 14.8x10.2x3.9in 9.3 kg 20.50 lb 6 PCS

RK2060

Replacement diaphragm
Voice coil: 1.75" (44mm)
Diaphragm material: Titanium
Impedance: 8 Ohm

MASTER DIMENSIONS: GROSS WEIGHT: MASTER PIECES:
405x395x150mm 15.6x7.5x5.9in 6 kg 13.23 lb 300 PCS

COD. 6000025

FRONT VIEW

SPECIFICATIONS

Driver: 1"
Voice coil: 3" (72mm)
Magnet: 60oz
Peak power: 400W
RMS power: 100W
Impedance: 8 Ohm
Frequency response: 800Hz – 18KHz
Sensitivity (SPL): 110dB
Diaphragm material: Titanium

MASTER DIMENSIONS: GROSS WEIGHT: MASTER PIECES:
405x395x150mm 15.9x15.6x5.9in 21 kg 46.30 lb 4 PCS

RK3100

Replacement diaphragm
Voice coil: 3" (72mm)
Diaphragm material: Titanium
Impedance: 8 Ohm

MASTER DIMENSIONS: GROSS WEIGHT: MASTER PIECES:
405x395x150mm 15.6x7.5x5.9in 6 kg 13.23 lb 300 PCS

HORNS & CABINET HARDWARE

► Our cabinet hardware components are the quick and convenient way to assembly your desired speaker using always the highest product quality manufacturing standards.

► Speaker horns are engineered to operate smoothly down to the lowest possible crossover frequency, while maintaining consistent and predictable dispersion throughout their intended range.

CDR 10

Symmetrical Plastic Horn 1 – 3/8"18 tpi 90° x 40°

1" THROAT HORN

PACKING INFO	
MASTER DIMENSIONS:	480x480x350 mm 18.9x18.9x13.8 in
GROSS WEIGHT:	6 kg 13.23 lb
MASTER PIECES:	12 PCS

COD. 6000026



BJ 2

Black metal 2 legs cabinet corner

PACKING INFO	
MASTER DIMENSIONS:	480x480x350 mm 18.9x18.9x13.8 in
GROSS WEIGHT:	5 kg 11.02 lb
MASTER PIECES:	100 PCS

COD. 6000036



D 2

Heavy Duty Steel - 35mm / 1.375" Diameter - Black Powder Coated

SPEAKER MOUNTING TOP HAT

PACKING INFO	
MASTER DIMENSIONS:	480x480x350 mm 18.9x18.9x13.8 in
GROSS WEIGHT:	5 kg 11.02 lb
MASTER PIECES:	25 PCS

COD. 6000030



K 1

Heavy Duty Steel - 90 x 75 x 72 mm (3.5"x3"x2.8") - Black Powder Coated

SPEAKER PORT TUBE

PACKING INFO	
MASTER DIMENSIONS:	480x480x350 mm 18.9x18.9x13.8 in
GROSS WEIGHT:	5 kg 11.02 lb
MASTER PIECES:	100 PCS

COD. 6000033



CDR 20

Plastic Horn 1 – 3/8"18 tpi

1" THROAT HORN

PACKING INFO	
MASTER DIMENSIONS:	480x480x350 mm 18.9x18.9x13.8 in
GROSS WEIGHT:	5 kg 11.02 lb
MASTER PIECES:	80 PCS

COD. 6000028



CDR 25

Plastic Horn 1 – 3/8"18 tpi 100° x 60°

1" THROAT HORN

PACKING INFO	
MASTER DIMENSIONS:	480x480x350 mm 18.9x18.9x13.8 in
GROSS WEIGHT:	5 kg 11.02 lb
MASTER PIECES:	8 PCS

COD. 6000029




K 2

Heavy Duty Steel - 63 x 43 x 50 mm (2.5"x1.7"x2") Silver Powder Coated

SPEAKER PORT TUBE

PACKING INFO	
MASTER DIMENSIONS:	480x480x350 mm 18.9x18.9x13.8 in
GROSS WEIGHT:	5 kg 11.02 lb
MASTER PIECES:	100 PCS

COD. 6000034




K 5

Heavy Duty Steel - 88 x 70 x 100 mm (3.4"x2.8"x3.9") Black Powder Coated

SPEAKER PORT TUBE

PACKING INFO	
MASTER DIMENSIONS:	480x480x350 mm 18.9x18.9x13.8 in
GROSS WEIGHT:	5 kg 11.02 lb
MASTER PIECES:	20 PCS

COD. 6000035



T 2

Plastic cabinet bar handle

PACKING INFO	
MASTER DIMENSIONS:	480x480x350 mm 18.9x18.9x13.8 in
GROSS WEIGHT:	5 kg 11.02 lb
MASTER PIECES:	25 PCS

COD. 6000031



T 5

Steel cabinet bar handle

PACKING INFO	
MASTER DIMENSIONS:	480x480x350 mm 18.9x18.9x13.8 in
GROSS WEIGHT:	5 kg 11.02 lb
MASTER PIECES:	25 PCS

COD. 6000032



JX 3

6 connectors dish

SPEAKON® JACK 1/4" TERMINAL

PACKING INFO	
MASTER DIMENSIONS:	480x480x350 mm 18.9x18.9x13.8 in
GROSS WEIGHT:	5 kg 11.02 lb
MASTER PIECES:	100 PCS

COD. 6000027




► Specifications subject to change without notice.

SYSTEM EXAMPLES

SUGGESTED NOVİK

LINEUP CONFIGURATION

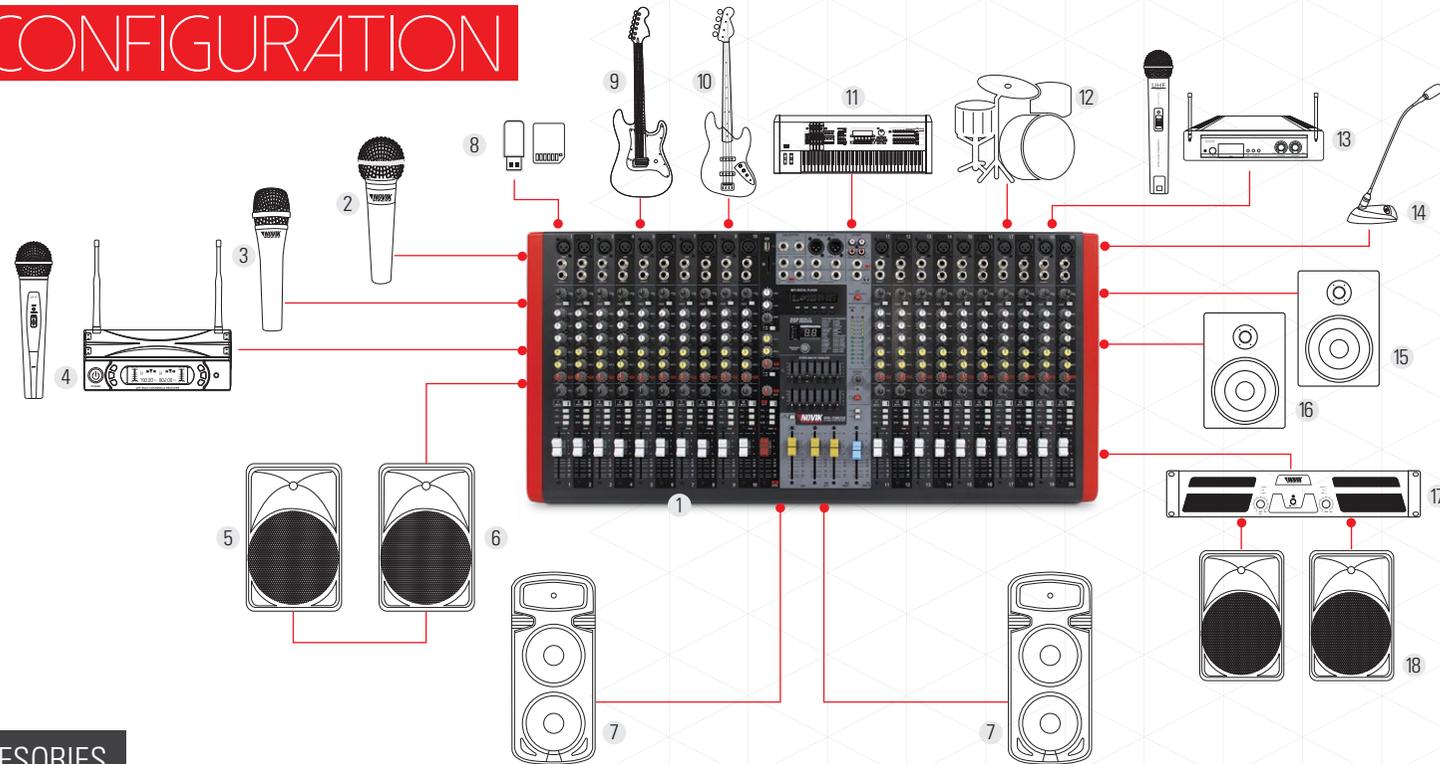

PRODUCTS & ACCESORIES

1- Mixer NVK 20M USB	7- EVOD BRAVERY 215	13- UNK 500
2- FNK 840	8- USB/SD CARD	14- FNK 10
3- FNK 540	9- GUITAR	15- CONCERT 5 MKII
4- UNK 600	10- BASS	16- CONCERT 6 MKII
5- EVO 350A USB	11- SYNTH	17- NOVO 900
6- EVO 250A USB	12- DRUMS	18- EVO 12P

► The setups shown on this pages are just a suggested configuration for NOVİK products, you can combine them in the most convenient way, while respecting technical specifications and recommendations included in the user manual. For more information or advice, please contact your local dealer.



PORTABLE
AUDIO
SYSTEM

www.novikneo.com

IMPACT ONE

PORTABLE AUDIO

6000137

The IMPACT 1 is the ultimate DJ system. With 1200W RMS power this system takes your party to the next level. Led light effects bring amazing shine to your party. Long life battery powered system, set your music when and where you like by the time you want. Wireless streaming allows you to control everything from your smartphone. You're the DJ, let's get the party started.



REC FUNCTION INCLUDED



1200W RMS POWER

Bluetooth

12" WOOFER 2x3" TWEETER

POWERED BATTERY

XBASS SYSTEM



IMPACT TWO

PORTABLE AUDIO

6000138

The IMPACT 2 is the ultimate DJ system. With 1500W RMS power this system takes your party to the next level. Led light effects bring amazing shine to your party. Long life battery powered system, set your music when and where you like by the time you want. Wireless streaming allows you to control everything from your smartphone. You're the DJ, let's get the party started.



REC FUNCTION INCLUDED

XBASS SYSTEM

1500W RMS POWER

Bluetooth

2x12" ULTRA LOW FREQUENCIES

2x3" TWEETER

POWERED BATTERY

IMPACT 3

PORTABLE PARTY

6000712

The IMPACT 3 is the ultimate DJ system. With 1200W RMS power this system takes your party to the next level. Led light effects bring amazing shine to your party. Long life battery powered system, set your music when and where you like by the time you want. Wireless streaming allows you to control everything from your smartphone. You're the DJ, let's get the party started.



REC FUNCTION INCLUDED



1200W RMS POWER

Bluetooth®

12" WOOFER 2x3" TWEETER

POWERED BATTERY



IMPACT 4

PORTABLE PARTY

6000713

The IMPACT 4 is the ultimate DJ system. With 1500W RMS power this system takes your party to the next level. Led light effects bring amazing shine to your party. Long life battery powered system, set your music when and where you like by the time you want. Wireless streaming allows you to control everything from your smartphone. You're the DJ, let's get the party started.



REC FUNCTION INCLUDED



1500W RMS POWER

Bluetooth®

2x12" ULTRA LOW FREQUENCIES

POWERED BATTERY

EARTHQUAKE DJ

MIXING UNLIMITED

6000714

DJ PARTY SYSTEM

The active loudspeaker EARTHQUAKE DJ is a true modern portable party audio system. This integrated system with powerfull and punchy bass, Bluetooth® connection, lights effects and DJ mixer will make your party epic.



2700W RMS POWER

Bluetooth®

2x12" ULTRA BASS WOOFER

REC FUNCTION INCLUDED



CROSSFADER DJ

- 2 DJ mix channel
- DJ effects
- Auto DJ function
- Crossfader DJ
- 2 USB inputs
- MP3 Player - digital equalizer
- Ultra Bass Woofer 2x12"
- X-BASS System
- LED Display
- Audio rhythmic lights FX

TWISTER 6

FUTURIST SOUND

6000709

The TWISTER 6 is a complete music system. With a futuristic design, lights effects, DJ Jog Wheels, battery, Bluetooth® connection and USB/SD inputs you can take the total control and enjoy your music as never before.



REC FUNCTION INCLUDED



600W RMS POWER

Bluetooth®

2x6.5" WOOFER

EXTREME-X

PORTABLE PARTY

6000711

EXTREME SOUND... LEGENDARY PARTIES.

The active loudspeaker EXTREME X is a true modern portable party audio system. This integrated system with powerful and punchy bass, Bluetooth® connection and lights effects, will make your party a legend...



REC FUNCTION INCLUDED



X BASS SYSTEM

2200W RMS POWER

Bluetooth®

2x10" ULTRA BASS WOOFER

POWERED BATTERY



INFINITY 8

PORTABLE PARTY

6000136

INFINITY 8 is a compact high-power system. With 1000W RMS power this system takes your party to the next level. Led light effects bring amazing shine to your party. Long life battery powered system, set your music when and where you like by the time you want. Your music is the spotlight, INFINITY 8 will make everyone have fun.



REC FUNCTION INCLUDED

1000W RMS POWER

Bluetooth®

2x8" ULTRA BASS WOOFER

POWERED BATTERY

▶ EXTREME-X / INFINITY 8
▶ PORTABLE AUDIO SYSTEM


THUNDER

PORTABLE AUDIO

6000710

SOUND, QUALITY AND DESIGN

This complex sound system combines an elegant design with powerful sound and defined bass, on quality and performance.



REC FUNCTION INCLUDED



1800W RMS POWER

Bluetooth®

2x10" ULTRA LOW FREQUENCIES

POWERED BATTERY



360° SOUND

TWISTER 4

PORTABLE AUDIO

6000715

SMALL SIZE, BIG PARTIES

You can not believe the power of this little great Twister 4. Your parties will not be the same again.

With Bluetooth® connection, USB/MicroSD inputs, AUDIORHYTHMIC LIGHTS FX and a complete panel control with exclusive Novik Neo design, you do not need anything else. Enjoy the music...



REC FUNCTION INCLUDED

300W RMS POWER

Bluetooth®

2x4" ULTRA BASS WOOFER



4x10" MASTER PIECES
4 PCS

TITAN

PORTABLE PARTY

6000718

The TITAN is a complete portable party music system. With lights effects, battery included, Bluetooth® connection and USB/SD inputs you can take the party control and enjoy your music as never



REC FUNCTION INCLUDED

500W
RMS POWER



10" WOOFER

POWERED BATTERY

PACKING INFO TITAN

MASTER DIMENSIONS:
476x462x368mm 18.7x18.1x14.4 in
GROSS WEIGHT: MASTER PIECES:
11.8 kg 26 lb 1 PCS



ADVENTURE 5

PORTABLE AUDIO SPEAKER

6000718



- Audio system
- Dynamic Microphone and cable included
- Powered by rechargeable battery
- Bluetooth® connectivity
- USB / Micro SD Music input
- Microphone and guitar inputs
- Digital EQ
- Woofer 5,25"
- Tweeter 1.5"
- Line input
- Recording mode
- Power: 120W RMS



PACKING INFO ADVENTURE 5

MASTER DIMENSIONS:
549x414x412mm 21.6x16.3x16.2 in
GROSS WEIGHT: MASTER PIECES:
18 kg 39.68 lb 6 PCS

SHOCK 6

PORTABLE PARTY

6000719

The street power!!

With Bluetooth® and battery included, REC function, USB/SD input, digital EQ and mic incorporated. Will be the voice in streets!



REC FUNCTION INCLUDED



PACKING INFO SHOCK 6

MASTER DIMENSIONS: GROSS WEIGHT: MASTER PIECES:
448x230x308mm 17.6x9x12.1 in 20 kg 44 lb 4 PCS



40W RMS POWER



6,5" WOOFER

POWERED BATTERY

TITAN / SHOCK 6 / ADVENTURE 5

PORTABLE AUDIO SYSTEM

IMPACT DJ

PORTABLE

6000717

IMPACT-DJ is the right product to organize the biggest party!
You can make everyone dance to the rhythm of the music. Led light effects bring amazing shine to your party.



WOOFER 2x12" ULTRA LOW FREQUENCIES

2100W RMS POWER

Bluetooth DUAL CONECTION

REACTOR DJ

PORTABLE

6000716

The active loudspeaker REACTOR-DJ is a true modern portable party audio system, This integrated system with powerfull and punchy bass, Bluetooth® conection, lights effects, party thruster and 2 DJ MIX.



FX Microphone WOOFER 2x12"

2500W RMS POWER

Bluetooth

ULTIMATE

PORTABLE

5303313

Are you ready for the ULTIMATE sound? You can't stop playing your music throughout the party, now you can charge your phone while playing music with Bluetooth connectivity.



2x12" WOOFER

2300W RMS POWER

Bluetooth

SHOT4

PORTABLE BLUETOOTH SPEAKER

COO: 600072



- Portable Bluetooth® speaker works with most Bluetooth® enabled devices
- Built-in 1800mAh lithium battery
- Built-in TF card reader
- Built in microphone for hands-free phone calls
- Volume +/- control
- Previous track/next track control
- With AUX input function to work with non-Bluetooth® devices

XBOOM

PORTABLE TURBO SPEAKER

COO: 600072



- Bluetooth® version 4.2
- Speaker output power 2x5w
- Frequency response 150Hz-20kHz
- Microphone sensitivity -40db
- Built-in lithium battery 1200mAh
- Playback time 4-6hours
- Charging port USB DC charging
- Charging time Approx 3 hours
- Unit size 130x130x280mm



2X4W



5 COLORS AVAILABLE



PACKING INFO

MASTER DIMENSIONS: GROSS WEIGHT: MASTER PIECES:
270x270x215mm 10.6x10.6x8.4in 10 PCS

2X5W



PACKING INFO

MASTER DIMENSIONS: GROSS WEIGHT: MASTER PIECES:
595X355X225mm 23.4x13.9x8.8in 4 PCS

LIGHTSHOW

PORTABLE LED LAMP SPEAKER

- Colorful Led light dancing to rythm of music
- Great button feeling
- Built-in hands free microphone
- USB & TF card slot
- Built in 3.5mm Aux inputs
- Bluetooth®: 4.2
- Output power: 2x3W
- Rechargeable lithium battery: 1800mAh
- Unit Size: 92*92*219mm



PACKING INFO

MASTER DIMENSIONS: GROSS WEIGHT: MASTER PIECES:
345x255x200mm 15.5x10x11m 6 PCS

COD. 6000728

2x3W

UP TO **6** HS
OF PLAYTIME

Compatible with:



Android™



iPhone®



Tablets

 **Bluetooth®**



BEAT XL

PORTABLE SOUND SPEAKER

COD. 600074



- Portable Bluetooth® Speaker
- Hands Free Phone Call
- Aux In Function
- Micro SD (TF) Slot Card
- USB Input
- Output Power: 2x4w
- Rechargeable Lithium Battery: 1200mah

3 COLORS AVAILABLE



Bluetooth®

2x4W

PACKING INFO

MASTER DIMENSIONS: GROSS WEIGHT: MASTER PIECES:
440x435x240 mm 17.3x17.1x9.4in 8 PCS

CHRONOS

DIGITAL ALARM CLOCK SPEAKER

600076



PACKING INFO

MASTER DIMENSIONS: GROSS WEIGHT: MASTER PIECES:
265x205x135mm 10.4x8x5.3in 10 PCS

- Bluetooth® Version 4.2
- Speaker output - 3W
- Power Input - DC 5V
- Play time - About 2-6 hours
- Charging Time - About 4-5 hours
- Built-In Rechargeable Battery - 1200mAh
- Micro SD (TF) Card/USB Drive Support up to 32GB
- Unit Size - 108*36*108 mm

3W



▶ BEAT XL / CHRONOS
▶ PORTABLE AUDIO SYSTEM

FOCUS

TOUCH CONTROLLED LED LAMP

600072

- Bluetooth®
- Touch controlled LED
- Auditorhythmic
- Hands-free phone call
- 6 colours
- 8 light modes
- Aux in
- Micro SD
- Portable
- Battery
- Compatible with Android™ & Iphone®
- USB charging

UP TO **6** HS
OF PLAYTIME

 **Bluetooth®**

4W



PACKING INFO

MASTER DIMENSIONS: GROSS WEIGHT: MASTER PIECES:
375x375x170mm 14.7x14.7x6.6in 9 PCS

START XL

PORTABLE BLUETOOTH® SPEAKER

600075

- High quality sound
- Excellent bass
- Hands-free phone call
- Come with USB and TF card support as well as a Line-In function
- Bluetooth®: 4.2
- Output power: 7W
- Rechargeable lithium battery: 1200mAh



 **Bluetooth®**

7W

4 COLORS AVAILABLE



PACKING INFO

MASTER DIMENSIONS: GROSS WEIGHT: MASTER PIECES:
505x340x240mm 19.8x13.3x9.4in 6 PCS

AURORA

PORTABLE LED SPEAKER

- Bluetooth®
- ConnectLink® Technology
- Autorhythmic
- Hands-free phone call
- 5 colours
- 7 light modes
- Aux in
- MicroSD
- Portable
- Battery powered
- USB charging

7 LIGHT MODES

ConnectLink® Technology



Compatible with Bluetooth® devices

PACKING INFO AURORA

MASTER DIMENSIONS: 430X325X190 mm 16.9x12.7x7.48in
GROSS WEIGHT: MASTER PIECES: 12 PCS



UP TO **6** HS
OF **6** PLAYTIME



Bluetooth®

5W

CONSTELLATION

PORTABLE LED SPEAKER

- Bluetooth®
- ConnectLink® Technology
- Auditorhythmic
- 5 colours
- 8 light modes
- Aux in
- MicroSD
- Portable
- Battery powered



UP TO **6** HS
OF **6** PLAYTIME

5W

8 LIGHT MODES

ConnectLink® Technology



Compatible with Bluetooth® devices



AION

DIGITAL ALARM CLOCK SPEAKER

- Bluetooth®
- Hand free phone call
- Speaker output - 3W
- Power input - DC 5V
- Play time
About 2-6 hours
- Charging time -
About 4-5 hs
- Built-In rechargeable
battery - 1200mAh
- USB / MicroSD - Up to 32GB

2 CONFIGURABLE ALARMS




Compatible with Bluetooth® devices

PACKING INFO AION

MASTER DIMENSIONS: 440x435x240 mm 17.3x17.1x9.4in
GROSS WEIGHT: MASTER PIECES: 8 PCS

3W

UP TO 6 HS OF PLAYTIME

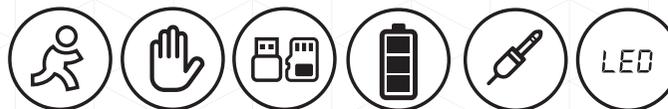

Bluetooth®

START XL SMART

PORTABLE BLUETOOTH SPEAKER

- High quality sound
- Excellent bass
- Hands-free phone call
- USB/MicroSD input
- AUX input
- Bluetooth®
- Output power: 15 W
- Rechargeable lithium battery: 1800mAh



PORTABLE BLUETOOTH® SPEAKER VOICE ASSISTANT FUNCTION



UP TO **6** HS
OF PLAYTIME

15W



Compatible with Bluetooth® devices

GLOW

PORTABLE LED LAMP SPEAKER

- Bluetooth® Version: 5.0
- Working distance: Up to 10 meters in open space
- Speaker output: 10W Power
- Input: DC 5V
- Play time: About 3-6 hours
- Charging Time: About 2-3 hours
- Built-In Rechargeable
- Battery: 1200mAh
- Micro SD (TF) Card/USB
- Drive: Support up to 32GB
- Unit Size: 95x95x180 mm

UP TO 6 HS
OF **6** PLAYTIME



Compatible with Bluetooth® devices



10W



 **Bluetooth®**

7 LIGHT
MODES



PACKING INFO AION

MASTER DIMENSIONS: GROSS WEIGHT: MASTER PIECES:
425x285x255mm 16.7x11.22x10.03in 6 PCS

▶ GLOW
▶ PORTABLE AUDIO SYSTEM

75

▶ Specifications subject to change without notice.

W-CHARGE

PORTABLE BLUETOOTH SPEAKER

- Bluetooth® version - 5.0
- USB/MicroSD input
- Play time - About 2-6 hours
- Charging Time - About 4-5 hours
- Speaker power - 2x7.5 Watts
- Bluetooth® Range - 33 feet (10m)
- Built-In Rechargeable Battery - 1800mAh
- USB Charging Port - 5V / 1A (Max)



WIRELESS
CHARGER

UP TO **6** HS
OF PLAYTIME



Bluetooth®

8 LIGHT
MODES

2x7.5W



Compatible with Bluetooth® devices

NOVIK
NEO



www.novikneo.com



PRODUCT LINE UP

PROFESSIONAL AUDIO EQUIPMENT

NOVIK NEO follows a line of investigation to constantly enhance our products. Some materials, production methods & design refinements are constantly introduced into existing products as a routine expression of that attitude. For this reason, any current NOVIK NEO product may differ in some aspect from its published description, but will always match or exceed the original design specifications.

www.novikneo.com