
SKP
PRO AUDIO
PRODUCT LINE UP
SOUND, KNOWLEDGE & PASSION
PREMIUM
100%
SKP PRO AUDIO
QUALITY
PROFESSIONAL AUDIO EQUIPMENT


SOUND, KNOWLEDGE & PASSION
SOUND
KNOWLEDGE
& PASSION
SOUND, KNOWLEDGE & PASSION



SKPCATALOGUE

PRODUCT LINE UP

SKP PRO AUDIO

MAX SERIES

THE MAX SERIES TECHNOLOGY AND DESIGN PROVIDES ACCESS TO THE **PREMIUM SOUND QUALITY OF SKP**.


Thermal and overload protection circuit to ensure proper operation in long journeys with very low noise and distortion. Versions include balanced inputs XLR, ¼ "Jack and RCA, Speakon and Binding post outputs. Soft Start and I.D.E.A (Intelligent Distortion Eliminator Appliance).



DETAILS

INTERIOR VIEW

1. ALUMINIUM HEAT SINK
2. VARIABLE SPEED FAN
3. XLR-TRS-RCA INPUT
4. INTELLIGENT DISTORTION ELIMINATOR APPLIANCE
5. OVERLOAD AND THERMAL PROTECTION
6. SPEAKON BIDING POST OUTPUT
7. HIGH PERFORMANCE TOROIDAL TRANSFORMER

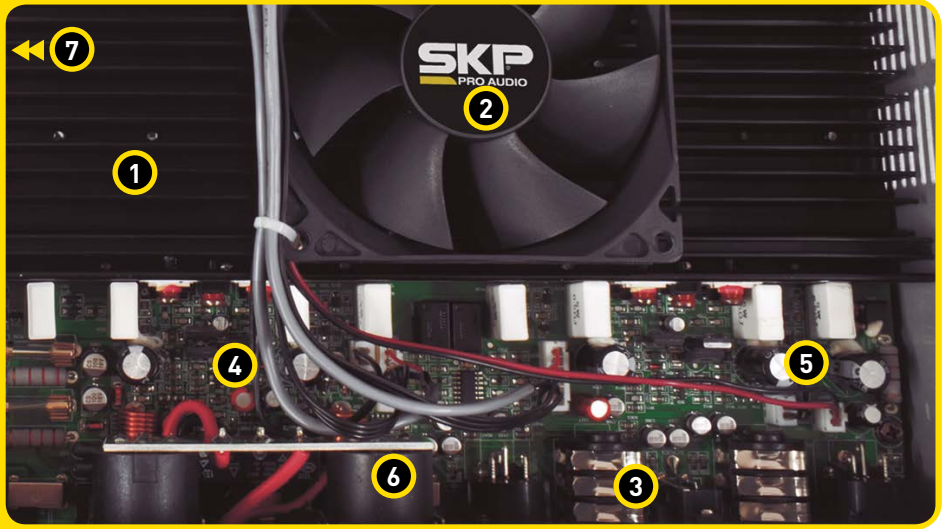

HOT FEATURES

- INTELLIGENT DISTORTION ELIMINATOR APPLIANCE
- LARGE CAPACITORS PROVIDE STORAGE OF BASS
- XLR - TRS - RCA
- VARIABLE SPEED FAN KEEPS THE UNIT RUNNING COOL EVEN UNDER THE MOST STRESSFUL CONDITIONS
- STEREO/BRIDGE-MONO MODE



MAX -320

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
520 x 370 x 170 mm 20,5 x 14,6 x 6,7 In	8,57 Kg / 18,9 Lb	1u

RMS POWER 300W

MAX -420

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
520 x 420 x 170 mm 20,5 x 16,5 x 6,7 In	9,53 Kg / 21 Lb	1u

RMS POWER 400W


MAX -720

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
520 x 420 x 170 mm 20,5 x 16,5 x 6,7 In	10,55 Kg / 23,3 Lb	1u

RMS POWER 700W

STEREO/BRIDGE-MONO MODE

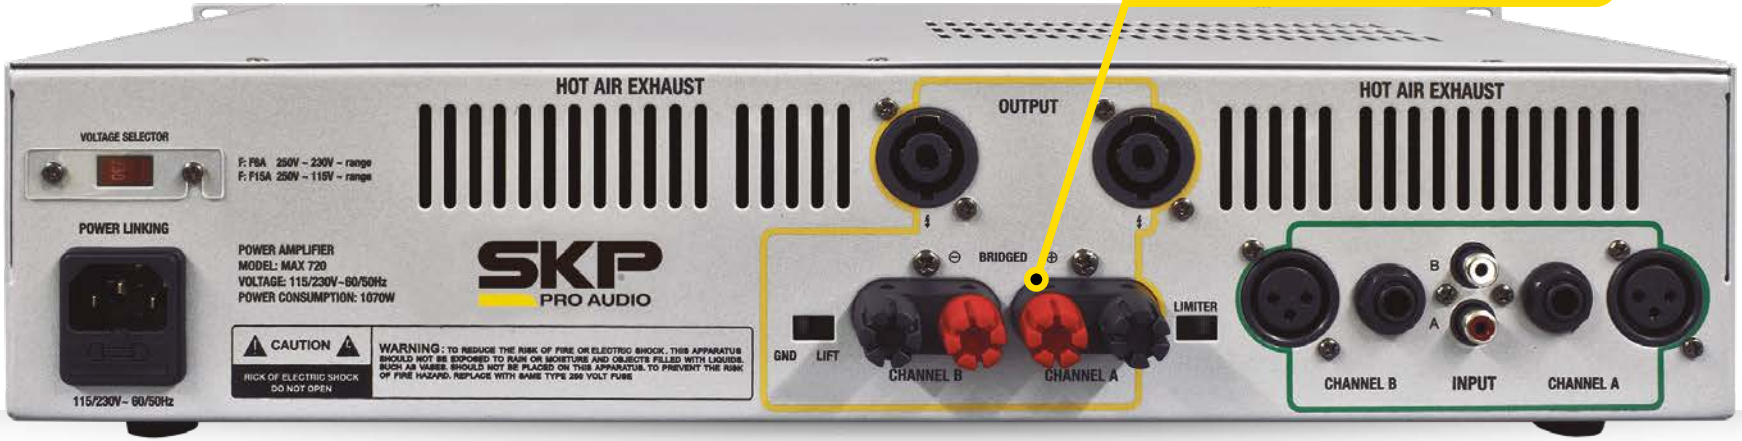

SPECIFICATIONS

	MAX-320 COD. 5102930	MAX-420 COD. 5102931	MAX-720 COD. 5102932
Stereo Output RMS Power (8Ω)	100W + 100W	135W + 135W	250W + 250W
Stereo Output RMS Power (4Ω)	150W + 150W	200W + 200W	350W + 350W
Bridge Output RMS Power (8Ω)	300W	400W	700W
Amplifier type	Class AB	Class AB	Class AB
Frequency Response	10Hz-50KHz ± 1.5dB	10Hz-50KHz ± 1.5dB	10Hz-50KHz ± 1.5dB
Input sensitivity	0.77V	0.77V	0.77V
Input impedance	20kΩ - Balanced	20kΩ - Balanced	20kΩ - Balanced
THD (1kHz @ 8Ω)	≤0.1%	≤0.1%	≤0.1%
S/N Ratio	>85dB	>85dB	>90dB
Damping Factor	>150 @ 8Ω/1KHz	>150 @ 8Ω/1KHz	>150 @ 8Ω/1KHz
Slew Rate	20 V/uS	20 V/uS	20 V/uS
Crosstalk	>70 dB @ Rated Output	>70 dB @ Rated Output	>70 dB @ Rated Output
Minimum Impedance load	4Ω	4Ω	4Ω
Consumption	400W Class I	450W Class I	1070W Class I

Specifications are subject to change without notice.

MAX-G SERIES

MAXG SERIES IS THE MOST PROFESSIONAL OPTION FOR THE SOUNDS SYSTEMS DESIGN.


MAXG Series offers the most high quality amplification in his three models of power amps equipped to satisfy any requirement in sound reinforcement. It's a superior amp with Class AB technology that provides maximum power controlled by thermal cut and DC fault protection.



DETAILS

INTERIOR VIEW


1. HIGH PERFORMANCE TOROIDAL TRANSFORMER
2. ALUMINIUM HEAT SINK
3. 3 WAY CROSSOVER
4. 4 VARIABLE SPEED FAN
5. BALANCED XLR-TRS INPUT
6. INTELLIGENT DISTORTION ELIMINATOR APPLIANCE
7. OVERLOAD AND THERMAL PROTECTION
8. SPEAKON OUTPUT

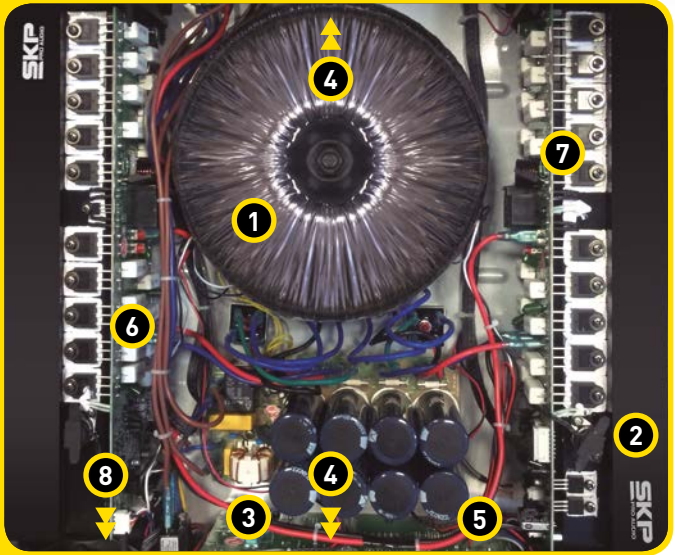

SPEED FAN

COOLING SYSTEM

MAXIMUM POWER CONTROLLED BY QUAD VARIABLE SPEED FAN.

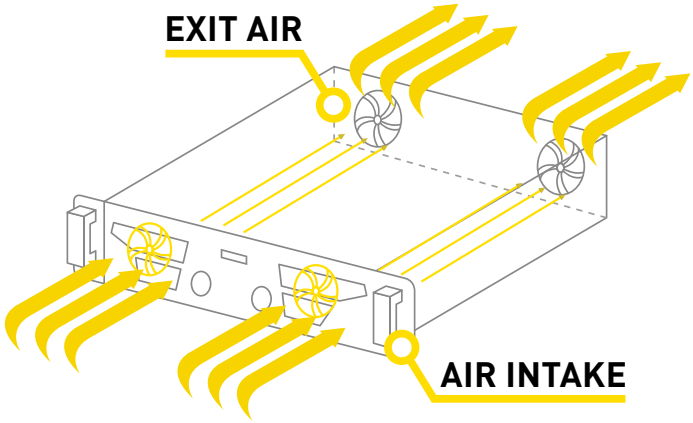

POWER & PERFECTION WITH TONS OF EXTRAS

It has Soft Start and I.D.E.A. Intelligent Distortion Eliminator Appliance for best performance. Among its many modifiable parameters amplification are highlighted high/mid/low frequencies selectable crossover for precise filtering. Standard outputs Speakon type.

MAX G -1220X

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
650 x 580 x 170 mm 25,6 x 22,8 x 6,7 In	16,45 Kg / 36,3 Lb	1u

RMS POWER 1200W

MAX G -1820X

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
650 x 580 x 170 mm 25,6 x 22,8 x 6,7 In	17,63 Kg / 38,9 Lb	1u

RMS POWER 1800W

MAX G -3620X

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
650 x 580 x 170 mm 25,6 x 22,8 x 6,7 In	26 Kg / 57,3 Lb	1u

RMS POWER 3600W

BUILT IN **CROSSOVER**



HOT FEATURES

- MOSFETS CREATE GREATER DYNAMIC SIGNAL OVER TRADITIONAL SOLID-STATE DESIGNS
- LARGE CAPACITORS PROVIDE STORAGE OF BASS
- INTELLIGENT DISTORTION ELIMINATOR APPLIANCE
- READY TO GO! 3 WAY CROSSOVER INCLUDED
- STEREO/BRIDGE-MONO MODE

SPECIFICATIONS

	MAX G-1220X COD. 5102933	MAX G-1820X COD. 5102934	MAX G-3620X COD. 5102935
Stereo Output RMS Power (8Ω)	300W + 300W	450W + 450W	900W + 900W
Stereo Output RMS Power (4Ω)	600W + 600W	900W + 900W	1800W + 1800W
Bridge Output RMS Power (8Ω)	1200W	1800W	3600W
Amplifier type	Class AB	Class AB	Class AB
Frequency Response	20Hz-20kHz ± 1.5dB	20Hz-20kHz ± 1.5dB	20Hz-20kHz ± 1.5dB
Input sensitivity	1V	1V	1V
Input impedance	20kΩ - Balanced / 10kΩ – Unbalanced	20kΩ - Balanced / 10kΩ – Unbalanced	20kΩ - Balanced / 10kΩ – Unbalanced
S/N Ratio	>83dB	>83dB	>85dB
Crosstalk	>45dB @ Rated Output	>45dB @ Rated Output	>55dB @ Rated Output
Damping Factor	>200	>200	>400
Minimum Impedance load	4Ω	4Ω	4Ω
Consumption	1150W Class I	1960W Class I	3730W Class I

Specifications are subject to change without notice.

MAX-D SERIES

"**LEGENDARY** FOR THEIR POWER, SOUND QUALITY, AND ROCK - SOLID CONTRUCTION..."


SKP MAXD Series provides maximum power in a lightweight construction. Soft start, Auto-Limiter offers high gain output signals without distortion and I.D.E.A. ("Intelligent Distortion Eliminator Appliance"). Cooler system with variable speed fan and thermal cut.



DETAILS

INTERIOR VIEW

1. HIGH FREQUENCY TRANSFORMER
2. ALUMINIUM HEAT SINK
3. ROBUST POWER SUPPLY
4. VARIABLE SPEED FAN
5. BALANCED XLR INPUT/OUTPUT
6. INTELLIGENT DISTORTION ELIMINATOR APPLIANCE
7. OVERLOAD AND THERMAL PROTECTION
8. SPEAKON AND BINDING OUTPUT

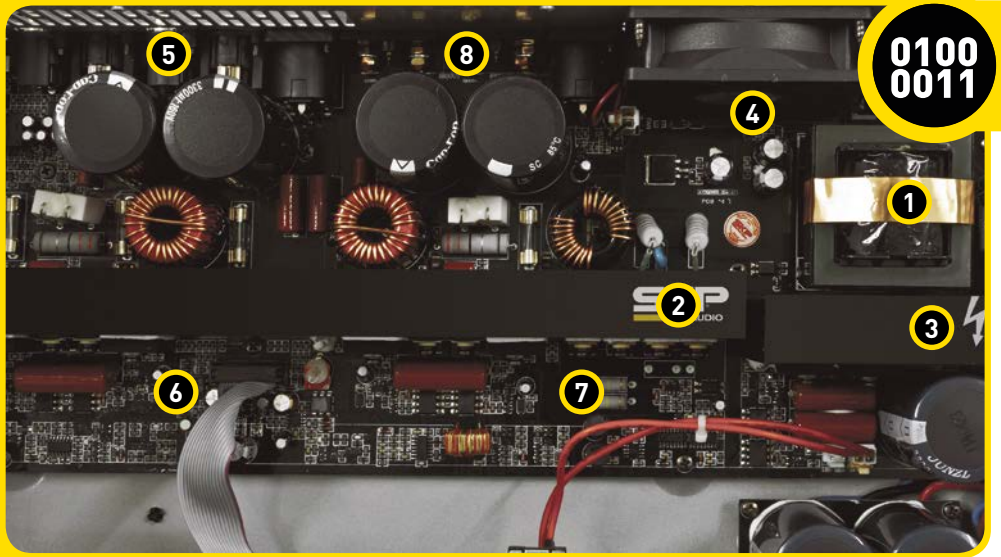

0100
0011

CLASS D AMPLIFIER

HOT FEATURES

- MOSFETS CREATE GREATER DYNAMIC SIGNAL OVER TRADITIONAL SOLID-STATE DESIGNS
- THERMAL PROTECTION, DC OUTPUT PROTECTION AND SHORT CIRCUIT PROTECTION
- VARIABLE SPEED FAN KEEPS THE UNIT RUNNING COOL EVEN UNDER THE MOST STRESSFUL CONDITIONS
- STEREO/BRIDGE-MONO MODE

MAX D FORCE -1320

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
520 x 400 x 160 mm 20,5 x 15,7 x 6,3 In	5,71 Kg / 12,6 Lb	1u

RMS POWER **1300W**

MAX D FORCE -2220

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
530 x 360 x 170 mm 20,9 x 14,2 x 6,7 In	6,12 Kg / 13,5 Lb	1u

RMS POWER **2200W**

MAX D FORCE -4220

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
530 x 360 x 170 mm 20,9 x 14,2 x 6,7 In	6,25 Kg / 13,8 Lb	1u


RMS POWER **4200W**

MAX D FORCE -7220

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
530 x 360 x 170 mm 20,9 x 14,2 x 6,7 In	6,25 Kg / 13,8 Lb	1u

RMS POWER **7200W**

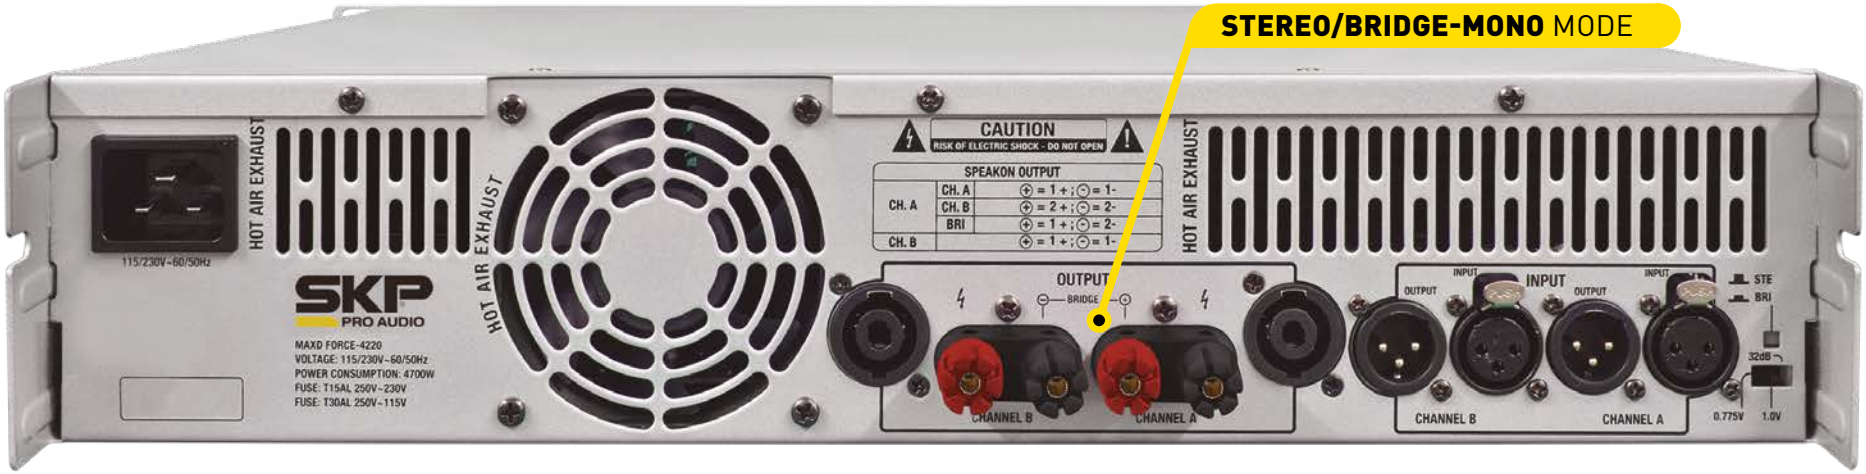

	WEIGHT 5,71 Kg / 12,6 Lb COD. 5102937	WEIGHT 6,12 Kg / 13,5 Lb COD. 5102938	WEIGHT 6,25 Kg / 13,8 Lb COD. 5102936	WEIGHT 6,25 Kg / 13,8 Lb COD. 5102939
SPECIFICATIONS	**MAX D FORCE -1320**	**MAX D FORCE -2220**	**MAX D FORCE -4220**	**MAX D FORCE -7220**
Stereo Output Power (8Ω)	325W + 325W	550W + 550W	1050W + 1050W	1800W + 1800W
Stereo Output Power (4Ω)	650W + 650W	1100W + 1100W	2100W + 2100W	3600W + 3600W
Bridge Output Power (8Ω)	1300W	2200W	4200W	7200W
Amplifier type	Class D	Class D	Class D	Class D
Frequency Response	20Hz-20KHz ± 1dB	5Hz - 30KHz ± 1dB	5Hz - 30KHz ± 1dB	5Hz - 30KHz ± 1dB
Input sensitivity	0.77V / 26dB / 1.4V	0.775V / 1V/ 32dB	0.775V / 1V/ 32dB	0.775V / 1V/ 32dB
Input impedance	20kΩ - Balanced , 10kΩ un-Balanced	20kΩ - Balanced , 10kΩ un-Balanced	20kΩ - Balanced , 10kΩ un-Balanced	20kΩ - Balanced , 10kΩ un-Balanced
THD	≤0.07%	≤0.03%	≤0.03%	≤0.03%
S/N Ratio	≥95dB	100dB	100dB	100dB
Damping Factor	>220 @ 8Ω/1KHz	1000 @ 8Ω/1KHz	1000 @ 8Ω/1KHz	1000 @ 8Ω/1KHz
Slew Rate	15 V/uS	20 V/uS	20 V/uS	20 V/uS
Crosstalk	>62 dB @ Rated Output	80 dB @ Rated Output	80 dB @ Rated Output	80 dB @ Rated Output
Minimum Impedance load	4Ω	4Ω	4Ω	4Ω
Consumption	1625W	2750W	4700W	8000W

Specifications are subject to change without notice.

MAX-D SERIES

LET THE POWER MAGNIFY YOUR SOUND.


9KW is the series of amplifiers with higher power and availability for up to four output channels. Specially developed for large audio distribution systems with high power handling and lofty SPL in the audience.



DETAILS

INTERIOR VIEW

1. HIGH FREQUENCY TRANSFORMER
2. ALUMINIUM HEAT SINK
3. ROBUST POWER SUPPLY
4. VARIABLE SPEED FAN
5. BALANCED XLR INPUT
6. INTELLIGENT DISTORTION ELIMINATOR APPLIANCE
7. OVERLOAD AND THERMAL PROTECTION
8. SPEAKON AND BINDING OUTPUT

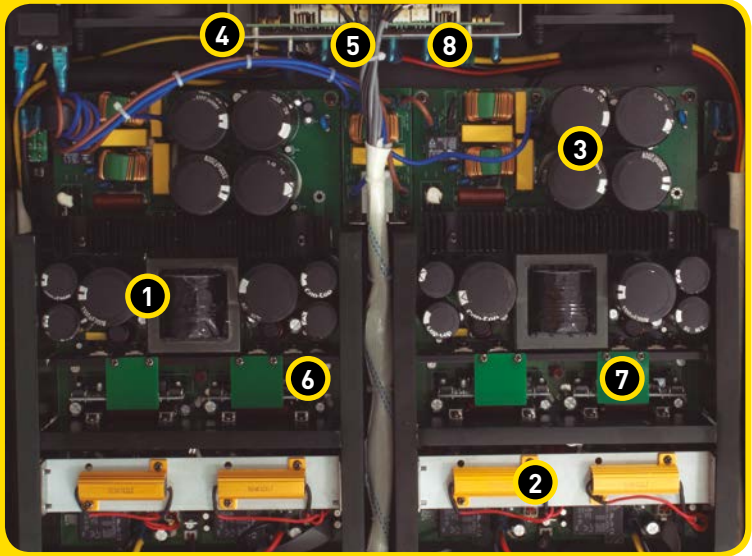

High performance through the latest technology Class D amplification.
Soft start, Auto-Limiter offers high gain output signals without distortion and I.D.E.A. ("Intelligent Distortion Eliminator Appliance"). Cooler system with double variable speed fan and thermal cut.

HOT FEATURES

- LARGE CAPACITORS PROVIDE STORAGE OF BASS
- THERMAL PROTECTION, DC OUTPUT PROTECTION AND SHORT CIRCUIT PROTECTION
- INTELLIGENT DISTORTION ELIMINATOR APPLIANCE
- CLASS D AMPLIFIER
- VARIABLE SPEED FAN

0100
0011

MAXD-9KW
CLASS D AMPLIFIER

MAX D -9KW

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
560x510x170mm 22x20x6.7in	30.5 kg/ 67.24 lb	

IMPEDANCE LOAD **4Ω**



SPECIFICATIONS | **MAX D**-9KW COD. 5102941

Stereo Output Power (8 Ω)	4 x 1400W
Stereo Output Power (4 Ω)	4 x 2480W
Bridge Output Power (8 Ω)	2 x 4960W
Amplifier type	Class D
Frequency Response	10Hz - 30kHz ± 1dB
Input sensitivity	0.775V / 1.4V/ 26dB
Input impedance	20KΩ - Balanced , 10KΩ un-Balanced
THD	≤0.01%
S/N Ratio	100dB
Damping Factor	2000 @ 8Ω/1kHz
Slew Rate	20 V/uS
Crosstalk	90dB @ Rated Output
Minimum Impedance load	4Ω
Output Mode	Stereo/Parallel/Bridge
Consumption	3300W



9920W | **RMS** POWER **4X 2480W**

Specifications are subject to change without notice.

MAXD-DSP SERIES

REFINE YOUR SOUND WITH THE LATEST GENERATION OF DIGITAL AMPLIFIERS!


MAXD-DSP Series is the most advanced technologies for live and touring amplifications systems. Maximum power that providing high and advanced performance with Class D amplification technology.



DETAILS

INTERIOR VIEW

1. HIGH FREQUENCY TRANSFORMER
2. ROBUST POWER SUPPLY
3. CUTTING EDGE DIGITAL AUDIO PROCESSOR
4. VARIABLE SPEED FAN
5. BALANCED XLR INPUT
6. INTELLIGENT DISTORTION ELIMINATOR APPLIANCE
7. OVERLOAD AND THERMAL PROTECTION
8. SPEAKON AND BINDING OUTPUT

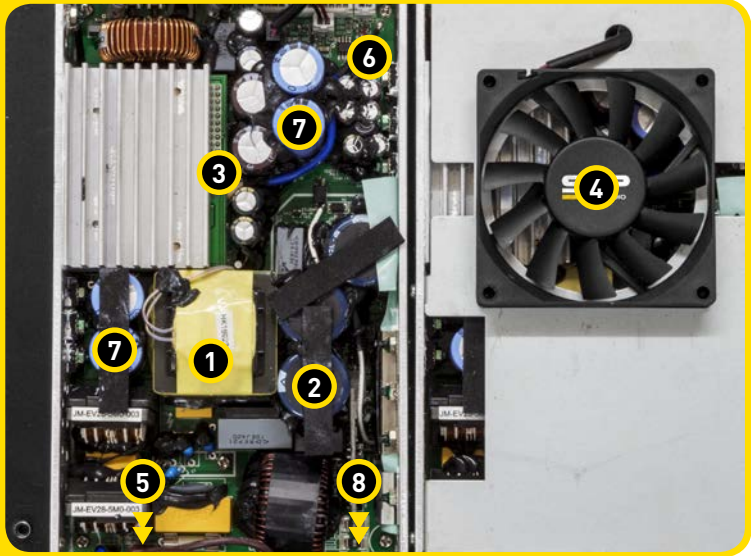

As its name indicates incorporates a Digital Signal Processor exclusively developed to explore the best performance of the amplifier according to the configuration required by the system design.

DSP parameters can be modified and set remotely by the IP connection port.

HOT FEATURES

- BIG LCD DISPLAY WITH BACKLIGHT
- STEREO/BRIDGE-MONO MODE
- 8 BAND EQ
- CLASS D AMPLIFIER
- DIGITAL COMPRESSOR

COOLING SYSTEM WITH VARIABLE FAN, THAT KEEPING A CONTROLLED UNIT TEMPERATURE UNDER THE MOST STRESSFUL CONDITIONS.

MAX D -3620DSP

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
520 x 400 x 160 mm 20,5 x 15,7 x 6,3 In	5,71 Kg / 12,6 Lb	1u

RMS POWER **1300W**

MAX D -1820DSP

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
530 x 360 x 170 mm 20,9 x 14,2 x 6,7 In	6,12 Kg / 13,5 Lb	1u

RMS POWER **2200W**



DSP SOFTWARE
3620DSP / 2120DSP

- 8-BAND PARAMETRIC EQ
- HIGH AND LOW PASS SELECTIONABLE FILTER
- COMPRESSOR/LIMITER
- DELAY (0ms/1200ms)
- POLARITY



SPECIFICATIONS

	COD. 5102944 **MAX D**-3620DSP	COD. 5102943 **MAX D**-1820DSP
Stereo Output Power (8Ω)	600W + 600W	350W + 350W
Stereo Output Power (4Ω)	1200W + 1200W	700W + 700W
Bridge Output Power (8Ω)	2400W	1400W
Input Sensitivity	0.9-1.1V (0±1dBV)	0.9-1.1V (0±1dBV)
Input Impedance	20KΩ balanced or 10KΩ Unbalanced	20KΩ balanced or 10KΩ Unbalanced
Frequency Response	20 Hz-20 KHz (0±1 dB)	20 Hz-20 KHz (0±1 dB)
Voltage Gain	37±0.5dB	34±0.5dB
THD+N(Ref.1K 1/8 Rated Power, A-Weighted)	<0.1%	<0.1%
S/N rate(Ref. Rated Power, A-Weighted)	>100dB	>96dB
Crosstalk(Below Rated Power)	>70dB	>70dB
Damping factor(1K 8Ω)	>200	>200

Specifications are subject to change without notice.

PA AMPLIFIER 70/100V TRANSFORMERLESS

PA -2800.4

HOT FEATURES


- 70V 100V — TRANSFORMERLESS OUTPUT STAGE
- 24V — DC 24V EMERGENCY INPUT SUPPLY
- 0100 0011 — SMART CLASS D POWER AMPLIFIER

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
560x510x170mm 22x20x6.7in	30.5 kg / 67.24 lb	1u



700W x4 POWER RATING

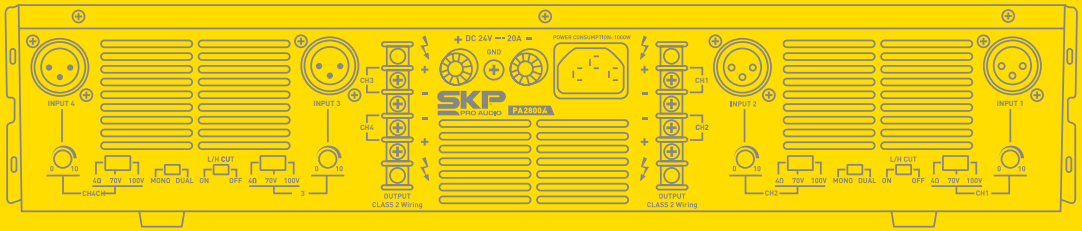

- 4V/70V/100V without output transformer
- I.D.E.A Intelligent Distortion Eliminator Appliance
- MONO or DUAL output mode / User selectable output mode
- Temperature protection / overload protection / DC protection
- Balanced XLR input
- User selectable LPF+HPF
- Full frontal indicators
- Variable speed fan

PA-2800.4 COD. 5102941

RMS Power	350W x4 (AC) / 100W x4 (DC 24V)
Power rating(20Hz-20Khz)	700W x4 (AC) / 140W x4 (DC 24V)
Outputs	4V / 70V / 100V switchable
Output connectors	2 two-pole touch-proof terminal strip
Frequency Response	20Hz-20KHz (±1dB) / 200Hz-10KHz (±1dB) LPF+HPF ON
Power Supply	AC 115V / 230V 50Hz/60Hz-24V DC
Maximum Input (balanced/1KHz)	12dBu
Input Impedance(Bal/Unbal)	20KΩ / 10KΩ
THD+N	<0.1%
S/N Ratio	>98dB
CMRR(balance/1KHz)	>70dB
Crosstalk (1KHz)	>70dB
Dimension (WxDxH)	434 x 353 x 88.5 mm (17.1" x 13.9" x 3.5")
Weight (Approx.)	10.25 Kg

Specifications are subject to change without notice.

HOT FEATURES

- 70V 100V — TRANSFORMERLESS OUTPUT STAGE
- 24V — DC 24V EMERGENCY INPUT SUPPLY
- 0100 0011 — SMART CLASS D POWER AMPLIFIER

PA -3000.2

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
560x510x170mm 22x20x6.7in	30.5 kg / 67.24 lb	1u




PA-3000.2

COD. 5102941

RMS Power	750W x2 (AC)
Power rating(20Hz-20Khz)	1500W x2 (AC)
Outputs	4V / 70V / 100V switchable
Frequency Response	20Hz-20KHz (±1dB)
	200Hz-10KHz (±1dB) LPF+HPF ON
Power Supply	AC 115V / 230V 50Hz/60Hz-24V DC
Maximum Input	12dBu
THD+N	<0.1%
S/N Ratio	>98dB
CMRR(balance/1KHz)	>70dB
Crosstalk (1KHz)	>70dB
Dimension (WxDxH)	434 x 353 x 88.5 mm (17.1" x 13.9" x 3.5")
Weight (Approx.)	10.6 Kg

1500W x2 POWER RATING

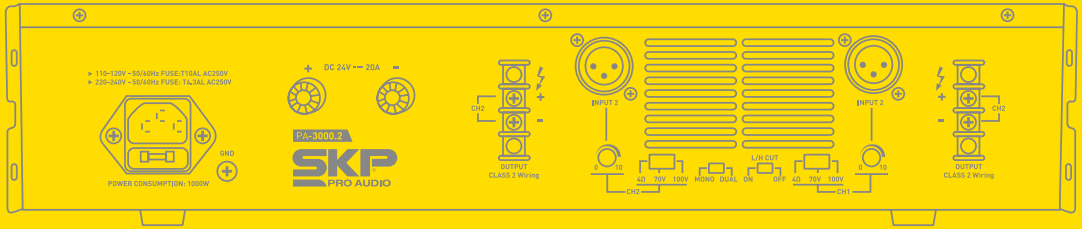

- 4V/70V/100V without output transformer
- I.D.E.A Intelligent Distortion Eliminator Appliance
- MONO or DUAL output mode / User selectable output mode
- Temperature protection / overload protection / DC protection
- Balanced XLR input
- User selectable LPF+HPF
- Full frontal indicators
- Variable speed fan

Specifications are subject to change without notice.

PA AMPLIFIER PROFESSIONAL SERIES



4 INDEPENDENT ZONES

4Ω - 8Ω - 25V - 70V - 100V OUTPUT

MAX POWER **3600W**

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
682x475x355 mm 24.4 x 47.5 x 14 in	30.5 kg / 67.24 lb	5u

5 INPUT **CHANNELS**



HOT FEATURES

- 4 ZONES
- COMBO INPUT CONNECTOR
- BALANCED XLR & 1/4" JACK INPUTS
- 2 BAND EQUALIZER
- 48V PHANTOM POWER

- 5 sets of gain, treble, bass and volume controls
- 5 groups VU meter for output and 2 RCA inputs
- Priority of Input 1. VOX mute function
- Power Output RMS 225W x 4 @ 4Ω
- 4 XLR+1/4 TRS combo input and 1 RCA input
- Telephone paging function, and monitor output
- 19" Rack mount type (3U size)

PA-900.4

COD. 4400434

Inputs	CH1-4:MIC. / Phantom: -50dBv; Line:-10dBv balance;
CH 5:	-10dB unbalance;
Telephone paging:	-10dBV
Frequency Response	60Hz-17KHz-3dB
Tone Control	Treble:±10dB at 10KHz; Bass:±10dB at 100Hz
T.H.D.	<0.1%
S/N Ratio	MIC >70dB;Line>80dB; Tell.>70dB
Priority for Input 1	MUTE CH2-5
Output Impedance	4Ω, 8Ω
Output Constant Voltage	25V, 70V, 100V
RMS Power Output	4 x 225W @4Ω
Program Power Output	4 x 450W @4Ω
Peak Power Output	4 x 900W @4Ω
Monitor Output	1W RMS
Phone Output	0.5W into 47Ω
Power Supply	AC 115V/230V 50Hz/60Hz switchable

Specifications are subject to change without notice.



PA-360.6 COD. 4400435

4Ω - 70V - 100V OUTPUT

REAR PANEL

- Telephone ringer & input
- RMS Power Output 6 x 60W @4Ω
- Program Power Output 6 x 120W @4Ω
- Peak Power Output 6 x 240 W @4Ω
- 1 rec output, 1 pre output, 1 AMP input
- PA-1M input and 24V DC output
- PA-6M input
- FM antenna terminal
- USB port and switch, external control connection for signal input
- 6 zone outputs, 4Ω output
- 24V DC input, power remote control
- AC power input

FRONT PANEL

- 4 Mic input gain / treble / bass controls / phantom power switches (XLR+1/4 TRS combo)
- 2 Line input gain / treble / bass controls
- 1 chime gain control, 1 chime switch (RCA)
- 1 telephone ringer, 1 telephone gain control,
- 1 telephone switch
- 1 siren gain control, 2 siren selector switches
- 1 master control
- 6 zone gain controls, 6 zone selector switches, 1 all zone selector switch
- MP3 + FM player with recording priority setting.

HOT FEATURES


- CHIMES AND SIRENS
- MP3 RECORDER AND PLAYER
- TELEPHONE DIRECT CONNECTION
- 6 ZONES OUTPUT
- READY TO PA-1M AND PA-6M
- DC 24V EMERGENCY INPUT SUPPLY

6 ZONES | **MAX** POWER **1440W** | **9** INPUT **CHANNELS**

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
682x475x355 mm 24.4 x 47.5 x 14 in	30.5 kg / 67.24 lb	5u

PA AMPLIFIER PROFESSIONAL SERIES

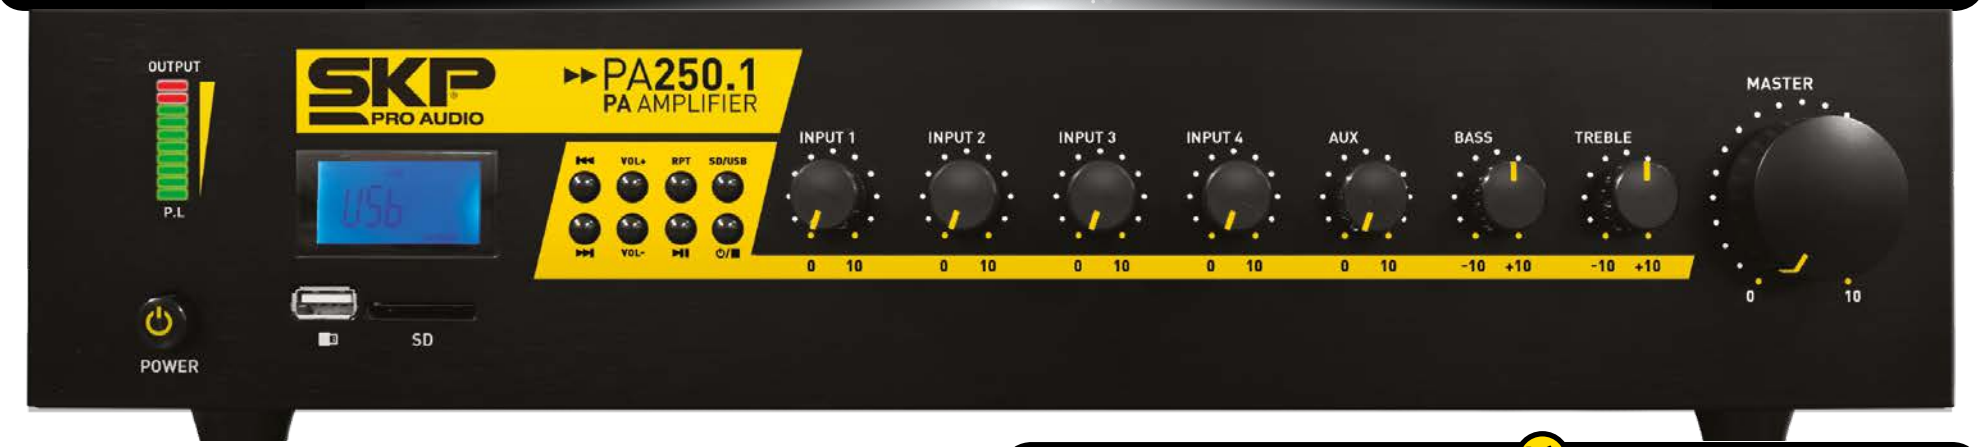

HOT FEATURES

- 70V AND 100V OUTPUT
- USB / SD MP3 PLAYER
- COMBO INPUT CONNECTOR
- DC 24V EMERGENCY INPUT SUPPLY

5 INPUT CHANNELS

4Ω - 70V - 100V OUTPUT

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
682x475x355 mm 24.4 x 47.5 x 14 in	30.5 kg / 67.24 lb	5u

MAX POWER 1000W



- Power Output RMS 250W @ 8Ω
- 4 Balanced combo inputs
- MIC sensitivity selectable
- 24V DC phantom supply
- 1 Aux (RCA) stereo input
- Priority function of input 1 over other inputs
- Treble and bass controls
- Outputs for low impedance and constant voltage speaker
- Power supply in AC 115V / 230V switchable, DC 24V
- LED output level indicator

PA-250.1

COD. 4400433

Inputs	4 Balanced combo inputs, 1 Aux/CD/Line
Output	Pre Output / Rec output
Frequency Response	80Hz-15KHz (±3dB); AUX:40Hz-18KHz
Media player	USB/SD MP3 player
RMS Power Output	250W
Program Power Output	500W
Peak Power Output	1000W
Output Impedance	Com 8Ω
Output Voltage	70V, 100V
Controls	5 volume controls, master volume, treble / bass
Total Harmonic Distortion	<1%
S/N ratio (Input 1-4)	>65dB
Power Supply	AC 115V/230V 50Hz/60Hz switchable; DC24V

Specifications are subject to change without notice.

PA AMPLIFIER COMMERCIAL SERIES



Bluetooth®

4 INPUT CHANNELS

70/100V CONSTANT VOLTAGE

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
410X395X316mm 15.6x15x12.4 in	13.2 Kg / 28.6 Lb	1u

MAX POWER **320W**

PW-070BT

COD. **14400431**

RMS Output power 80W	Digital Preset EQ	Emergency mode 12V DC
4 Channel	Speaker Output 4ohm, 8ohm, 16ohm	External Battery
2 Mic Inputs	Line output 70V, 100V	Power supply
Input sensitivity-42dB	Frecuency Response	110/220V~60/50Hz
1 Aux Input	20Hz-20Khz	Siren Function
Input sensitivity-20dB	T.H.D 0.8%	Remote control
MP3 player system with USB and SD slot	S/N Ratio <75dB	



Bluetooth®

3 INPUT CHANNELS

DC 12V BATTERY INPUT

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
395X380X316mm 15.6x15x12.4 in	11.5 Kg / 25.4 Lb	2u

MAX POWER **180W**

PW-045BT

COD. **4400431**

RMS Output power 45W	Stereo Speaker Output 8ohm, 16ohm
2 Channel	Frecuency Response 20Hz-20Khz
1 Aux Input 1/8" JACK	T.H.D 0.7%
1 Stereo RCA Input	S/N Ratio <80dB
MP3 player system	Emergency mode 12V DC External Battery
USB PORT	Power supply 110/220V~60/50Hz
SD PORT	Remote control

Specifications are subject to change without notice.

LOUDSPEAKERS MANAGEMENT SYSTEM



24-BIT LOUDSPEAKER MANAGEMENT SYSTEM

- Feedback Elimination
- 2.7 Seconds of Alignment and Zone Delay
- RS-232 PC GUI control
- Classic dbx Compression and Limiting
- Graphic and Parametric EQ
- Auto-EQ Function
- Full Bandpass, Crossover, and Routing Configurations
- Auto Gain Control
- Pink Noise Generator and fulltime RTA
- Setup Wizard with JBL speaker and Crown Power Amplifier Tunings
- Security Lockout
- Wall Panel Control Inputs

HOT FEATURES

- 48KHZ ADC/DAC
- 6 OUTPUTS AND 2 INPUTS
- BALANCED XLR & AND OUTPUTS

DSP 8 SOFTWARE



LOGISTICS INFORMATION

MASTER DIMENSIONS
515 x 225 x 100 mm
20,3 x 8,9 x 3,9 In

GROSS WEIGHT
2,7 Kg / 6 Lb

MASTER PIECES
1u

DSP-8 COD. 14400431

Input: (2) line inputs. (1) RTA Mic input	Mic Preamp Phantom Power: +15VDC	Max Output:+22dBu	D/A Dynamic Range: 112 dB A-weighted, 109dB unweighted
Input Connectors: (2) Female XLR line inputs. XLR	Mic Preamp Equivalent Input Noise (EIN): 110dB,	A/D Converter: dbx Type IV™ Conversion System	Dynamic Range: >110 dB A-weighted, >107dB unweighted
RTA Mic input	22Hz-22KHz, 150KHz Ω	A/D Dynamic Range: (line) >113 dB, A-weighted, >110	THD+Noise: 0.003%
Input Type: Electronically balanced /RF filtered	Output: 6 total	dB unweighted	Frequency Response: 20Hz – 20KHz, ± 0.5dB
Input Impedance: >40KΩ	Output Connectors: Male XLR	Type IV Dynamic Range : >119dB, A-weighted, 22KHz	Interchannel Crosstalk: >110dB, 120dB typical, (input-to-
Max Input: +30dBu with input jumpers in +30 position	Output Type: Electronically balanced, RF filtered	BW; >117 dB, A-weighted, 22KHz BW	output: >100dB)
CMRR:> 45dB	Output Impedance: 120Ω	Sample Rate: 48KHz	

Specifications are subject to change without notice.



24-BIT LOUDSPEAKER MANAGEMENT SYSTEM



DSP 4 SOFTWARE

LOGISTICS INFORMATION

MASTER DIMENSIONS
515 x 225 x 100 mm
20,3 x 8,9 x 3,9 In

GROSS WEIGHT
2,7 Kg / 6 Lb

MASTER PIECES
1u

- 24-bit Σ-Δ A/D, D/A,48KHz sampling rate
- Internal 32-bit DSP processing
- A flexible 2 inputs, 4 outputs multi-mode crossover format
- 2×2 way crossover - 1×2 way crossover + 2 sub crossover
- 1×3 way crossover + 1 aux crossover - 4 way crossover
- Each parametric section provides Limit control
- Each channel max 8ms delay with parameters adjustable
- Low pass crossover range: 20Hz-20KHz, 377 positions
- High pass crossover range: 10Hz-16KHz, 380 positions
- Lock function
- USB control (with PC software)
- 6×8 LED inputs/outputs accurate level meters
- 2×16 LCD display with backlight
- Frequency response: 20Hz-20KHz
- 10 user memories

DSP-4

COD. **5110167**


Inputs: Two electronically balanced	Distortion: 0.06%	Filtres: 1 of each per output
Outputs: Four electronically balanced	Output gain: Adjustable -40dB to +6dB in 1dB steps	Frequency (HPF): 20Hz-20KHz, 377 positions
Impedance: 10KΩ	and mute	Frequency (LPF): 20Hz-20KHz, 377 positions
CMRR: 50dB 50Hz-10KHz	Parametric Equalization: 3 Sections per output.	Response: Butterworth 12/18/24dB per octave
Source Imp: 60Ω	Filters: -12dB to +12dB in 1dB steps.	Display: 2x16 character backlit LCD.
Frequency Response: 20Hz-20KHz, 1dB.	Center frequency: 100Hz-20KHz, ISO Frequency	Input meter: 2x8 point, -36dB to digital clip.
Dynamic Range: 100dB 20Hz-20KHz	Filter Q: 0.5, 1, 2, 3, 4, 5, 6, 7, 8, 9, 10	Output meter: 4x8 point, -36dB to digital clip, mute indication.

HOT FEATURES

- 24 BIT DSP
- 48KHZ ADC/DAC
- ULTRA LOW DISTORTION

Specifications are subject to change without notice.

GRAPHIC EQUALIZER

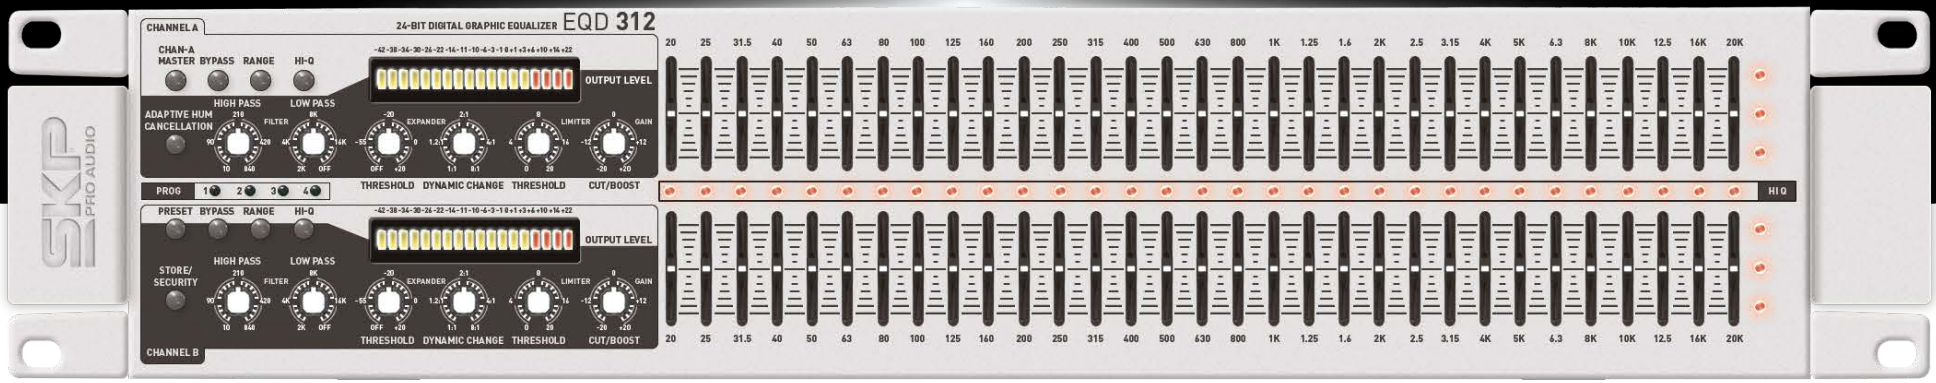

DIGITAL GRAPHIC EQUALIZER



LOGISTICS INFORMATION

MASTER DIMENSIONS
550 x 300 x 340 mm
21,7 x 11,8 x 13,4 In

GROSS WEIGHT
5,75 Kg / 12,7 Lb

MASTER PIECES
2u

HOT FEATURES

- **BALANCED XLR & UNBALANCED 1/4"(6.5MM) JACK INPUTS**
- **GRAPHIC INTERFACE, 24-BIT DIGITAL PROCESS**
- **48KHZ ADC/DAC**
- **COMPRESSOR**
- **EXPANSOR**

- Graphic interface, 24-Bit digital process, simple operation
- Separate High Pass & Low Pass Filter for each channel through different combinations, you can set up you 2-way, 3-way, 4-way system with ease; due to being digital, frequency division is more accurate.
- Dynamic expansion and able to setup threshold control for system noise.
- Limiter - the standalone "brickwall" limiter for each channel carries threshold control to prevent transient shift, keeping the system from being damaged.
- HI Q selection - Under normal Q and HI Q, center point is unchanged; however HI Q place less influence over adjacent frequencies.
- Storage - EQD-312 can store 4 User-Programmable Presets; can be summoned under specific circumstances with ease.
- AHC-Adaptive Hum Cancellation. Unique feature of EQD-312. As long as under AHC, the annoying 50Hz/60Hz system noise due to grounding will be greatly reduced.

EQD-312

COD. **5100739**

Number of Channels: Two
Dynamic Range: > 105dB
Signal to Noise: >90dB
Headroom: +20dBu
Frequency Response: 10Hz-20KHz 0.5dB
Channel Gain: -20dB / +20dB
THD+N (Un-weighted): 0.005%
Input Impedance: 10KΩ
Input Connectors: XLR, 1/4" TRS
Output Impedance: 51Ω
Metering: -24dBu / +20dBu
Power Supply Input: AC115/230V 60Hz-50Hz
Power: 20W
Dimensions: 17 1/8" x 11" x 3 ½" (483 x 280 x 88mm)

Specifications are subject to change without notice.

HOT FEATURES

BALANCED XLR & AND OUTPUTS · 0.01 %THD ULTRA LOW DISTORTION · HIGH PASS FILTER · PHASE SWITCH





LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
550 x 300 x 340 mm 21,7 x 11,8 x 13,4 In	5,75 Kg / 12,7 Lb	2u

2X15 STANDARD **1/3 OCTAVES**

EQ-231


COD.5100725

Graphic Equalizer

- 2x31 standard 1/3 octaves
- Output level indicator
- 4-segments LED
- EQ/Bypass
- Frequency response: 20Hz – 20kHz (±1dB)
- S/N ratio: ⩾ 80dB
- Input Gain control: - 12dB to + 12dB
- Low cut frequency: 45Hz
- Boost & cut filter: ±12dB
- Power Supply: AC 100 - 240V 50/60Hz

HOT FEATURES

BALANCED XLR & AND OUTPUTS · 0.05 %THD ULTRA LOW DISTORTION · HIGH PASS FILTER · 6dB 12dB SWITCHABLE GAIN

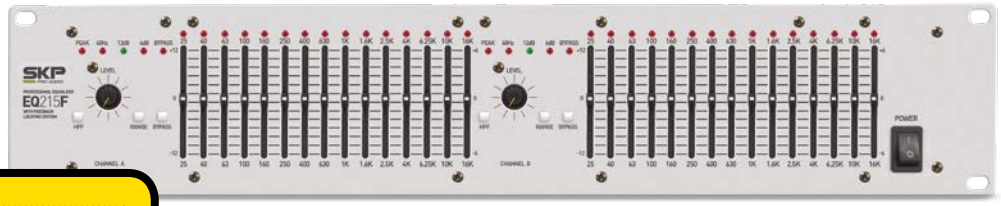



LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
550 x 300 x 340 mm 21,7 x 11,8 x 13,4 In	5,75 Kg / 12,7 Lb	2u

2X15 STANDARD **1/3 OCTAVES**

EQ-1215F

COD. 5100723

Graphic Equalizer

- 2x15 standard 1/3 octaves
- Output level indicator
- Peak LED
- EQ/Bypass
- Frequency response: 20Hz – 20KHz (±1dB)
- Output impedance: 330Ω
- Maximum input level: +21dBu
- Maximum output level: +21dBu
- Boost & cut filter: ±12dB
- Power Supply: AC 115 - 230V 50/60Hz

HOT FEATURES

BALANCED XLR & AND OUTPUTS · 15 BAND GRAPHIC EQUALIZER · 0.05 %THD ULTRA LOW DISTORTION · AJUSTABLE LOW CUT





LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
550 x 350 x 340 mm 21,7 x 13,8 x 13,4 In	3,74 Kg / 8,2 Lb	5u

2X15 STANDARD **1/3 OCTAVES**

EQ-152

COD. 5100748

Graphic Equalizer

- 2x15 standard 1/3 octaves
- Input level
- EQ/Bypass
- EQ control range
- Output impedance: 330Ω
- Maximum input level: +21dBu
- Maximum output level: +21dBu
- 4KHz, 6.3KHz, 10KHz, and 16KHz
- Boost & cut filter: ±12dB
- Power Supply: AC 100 - 240V 50/60Hz

Specifications are subject to change without notice.

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
530 x 260 x 340 mm 20,9 x 10,2 x 13,4 In	2,9 Kg / 6,4 Lb	5u



HOT FEATURES

- BALANCED XLR INPUT
- BALANCED XLR OUTPUT
- 2 WAY STEREO CROSSOVER
- 3 WAY MONO CROSSOVER

VX-02

COD. 5100670

THD: >0.004%

S/N ratio: <90dB
Input impedance: 50K ohms (balanced)
Output impedance: 220Ω, balanced
Max. input level: +21dBu
Max. output level: +21dBu
Power: AC 115 - 230V 50/60Hz

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
530 x 260 x 340 mm 20,9 x 10,2 x 13,4 In	2,84 Kg / 6,3 Lb	5u



HOT FEATURES

- BALANCED XLR INPUT
- BALANCED XLR OUTPUT
- 3 WAY STEREO CROSSOVER
- 4 WAY MONO CROSSOVER

VX-03

COD. 5100670

THD: <0.006%

S/N ratio: <90dB
Input impedance: 40KΩ (balanced)
Output impedance: 102Ω
Max. input level: +21dBu
Max. output level: +21dBu
Power: AC 115 - 230V 50/60Hz



LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
530 x 300 x 340 mm 20,9 x 11,8 x 13,4 In	2,94 Kg / 6,5 Lb	5u

HOT FEATURES

- EXPANDER / GATE
- EXPANDER AND COMPRESSOR THRESHOLD LEDS
- XLR AND TRS BALANCED INPUT AND OUTPUT
- +4dBU/-10dBV SWITCH

COMPRESSOR IV

COD. 5100698

Frequency response: Flat 20Hz – 20KHz (+/-0.5dB)
Bandwidth 0.35Hz – 90KHz (-3dB)
Distortion + Noise: 0.2% any amount of compression at 1KHz
Inter-modulation distortion: -99dB unweighted (20Hz - 20 KHz)
Input impedance: 40KΩ (balanced)
Maximum input level: +22dBu
Maximum output level:+21dBu
Dynamic range: 114dB unweighted
Inter-channel crosstalk: -95dB (20Hz - 20 KHz)
Stereo coupling: True RMS power summing
Threshold: Compressor: Over Easy @ or hard-knee: -40 to +20dBu
Expander/gate: -60 to +10dBu
Ratio: Compressor: 1:1 to infinity:1
Expander/gate: 1:1 to 4:1
Attack time: Compressor: scalable program-dependent auto dynamic
Expander/gate: <100M
Power consumption: AC 115 - 230V 50/60Hz

Specifications are subject to change without notice.

HOT FEATURES

- XLR AND TRS BALANCED INPUT AND OUTPUT
- 0.005 %THD — ULTRA LOW DISTORTION
- CLASSIC/POP HARMONIC BLEND CONTROL
- BASS PROCESSOR

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
530 x 320 x 340 mm 20,9 x 12,6 x 13,4 In	2,93 Kg / 6,5 Lb	5u



EXCITTER II

COD. 5100174

Input impedance: 40KΩ (balanced)

- Normal operating level: -40dB to –2dB
- Maximum input level: +20dBu (unbalanced)
- Maximum output level: +21dBu (balanced)
- Output: DC-decoupled balanced output stage
- Output impedance: 40Ω (balanced)
- Common mode rejection: better than 40dB
- Fr. Response: 10Hz to 50 KHz (±1dB)
- SW ratio: > 90dB
- Multi-band sound enhancer
- Mono bass output
- 100Hz-250Hz sub output
- Power: AC 115 - 230V 50/60Hz

HOT FEATURES

- 32b DSP — 32 BIT DIGITAL SIGNAL PROCESSOR
- 48 KHZ — 48KHZ ADC/DAC
- PRE — 2 CRYSTAL CLEAR MICROPHONE PREAMP
- REVERB, DELAY AND MODULATION EFFECTS

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
530 x 320 x 340 mm 20,9 x 12,6 x 13,4 In	2,93 Kg / 6,5 Lb	5u



PROCESSOR II

COD. 5100180

32-Bit

- 48KHz Sampling
- 2 Mic input and 1 group stereo line
- Digital LED Display
- 3 Memory Functions
- Frequency response: 20Hz - 20KHz (±1.5dB)
- THD: 0.02% (0dB, 1kHz output)
- SW ratio: 98dB
- Power Supply: AC 115 - 230V 50/60Hz

Specifications are subject to change without notice.







PASSIVE STEREO DIRECT BOX

HOT FEATURES

- HIZ INPUTS
- THRU OUTPUTS
- SIGNAL ATTENUATOR PAD
- BALANCED LOW-Z OUTPUTS
- GROUND LOOP ELIMINATOR

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
44 x 32 x 25 mm / 17,3 x 12,6 x 9,8 In	4 Kg / 8,8 Lb	60u

DI-S2

COD. 5100184

- Stereo passive direct box
- Extreme signal levels without distortion
- Ultra linear frequency response
- Eliminates hum and buzz
- Easy and quick adjustements
- Rugged contruction
- No need external power supply
- Isolation transformers
- Balanced XLR outputs (600)

USB/SD PRO PLAYER

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
357 x 320 x 592 mm 14,1 x 12,6 x 23,3 In	10,7 Kg / 23,6 Lb	4u

MEDIA PLAYER

- This innovative product gives the modern DJ lots of possibilities to work without CD, The only thing you need is the USD-2010, a USB or SD card.





HOT FEATURES

- PITCH CONTROL
- BIG LCD DISPLAY WITH BACKLIGHT
- USB AND DUAL SD
- FAST TRACK SEARCH

USD-2010


COD. 4370632

USB and Dual SD Professional Player	Max. Number of Folders: 999	Output Level: 2V ± 0.5dB
Full Functional MP3 Playback	Max. Number of files: 999	Channel Balance: Within 0.5dB Kbps
Seamless loop	Big LCD Display with Backlight	S/N Ratio: 98dB
Tempo look	MP3 Format: MPEG 1 Layer 3/MPEG 2 Layer 3/MPEG 2.5 Layer 3	L/R Separation: 98dB
ID3 Tag	MPEG 1 Layer 3: 320 Kbps Xing/VBRI- VBR	Dynamic Range: 93dB
Break Function (+/-100%)	MPEG 1 Layer 3 Sampling Rates: 48 kHz (mono & stereo)	Frequency Response: 17-18 KHz ± 0.2dB
Fast Track Search	MPEG 2 Layer 3: 160 Kbps	Power Source: DC 6V, 2A
Pitch control range: Within +/-4%, +/-8%, +/-16%	MPEG 2 Layer 3 Sampling Rates: 24 KHz	Dimensions: 482(W) x 88(D) x 120.4(H) mm
Pitch bend: +/-4%, +/-8%, +/-16%	MPEG 2.5 Layer 3: 160 Kbps	
Pitch accuracy: +/-0.15 %	MPEG 2.5 Layer 3 Sampling Rates: 12 KHz	

Specifications are subject to change without notice.

PERFORMANCE DJ CONTROLLER



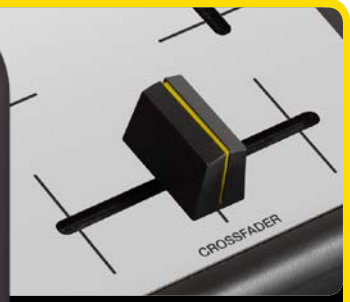

CROSSFADER ACCESORIES

HOT FEATURES

- VIRTUAL DJ LE INCLUDED
- 0.003 %THD — ULTRA LOW DISTORTION
- USB POWERED
- HEADPHONES OUTPUT

SMX-800

COD. 4370639

Headphones output

- Built-in high quality sound card
- Three-band EQ
- Bundle with Virtual DJ LE
- Low latency ASIO driver ready
- S/N ratio: >80dB
- THD+N:<0.003%
- USB powered
- Crosstalk: 80dB

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
385 x 268 x 250 mm 15,2 x 10,6 x 9,8 In	3,6 Kg / 7,9 Lb	2u

BAG INCLUDED





Specifications are subject to change without notice.

PERFORMANCE DJ CONTROLLER





CROSSFADER ACCESORIES

SMX 2200

ALL-IN-ONE PERFORMANCE DJ CONTROLLER.

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
725 x 543 x 284 mm 28,5 x 21,4 x 11,2 In	15,64 Kg / 34,5 Lb	4u



DIGITAL MIDI CONTROLLER

VIRTUALDJ LE INCLUDED



HOT FEATURES

- 4X — 4 DECKS CONTROL
- BALANCED TRS OUTPUTS
- TRS, RCA AND 1/8" INPUTS
- 2X — DUAL HEADPHONES OUTPUT
- TOUCH SENSITIVE JOG WHEELS

COD. 4370609

Inputs: Line/Phone x 2 (RCA), MIC x2 (6.3mm), Aux x1, USB type B x 1	Headphone with level control and cue mixing	Jog wheels sensor adjust knobs for each wheel
Outputs: Master x 2 (balanced and RCA)	Dual headphone jack 6.3mm and 3.5mm	Durable large-size Cue, PLAY and Cue Play buttons
Headphone x 2 (3.5mm and 6.3mm)	Dual 10 LED vu monitor display	Dual functions cross fader for VirtualDJ (Audio/Video Cross fader)
Buit-in high quality sound card	DVS direct mode for timecode "DJing" software	Dual FX units control with 4 knobs and 4 buttons for each unit
Matrix inputs select for diversity inputs	Bundle with VirtualDJ LE	Independent 8 samples buttons for sample deck or sample bank
Three-band EQ with Full output kill function for each channel	Low latency ASIO driver ready	108 control elements included 76 buttons, 19 knobs, 6 encoders,
MP3 player and Tablet pad friendly Aux input	Intuitive layout design and 4 Decks control	5 faders and 2 jog wheels
MIC with level control	Touch-sensitive jog wheels	Control Video transition and video effect for video DJing software



Specifications are subject to change without notice.

DJ MIXERS



LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
160x510x185mm 6.3x20x7.3 in	7.98 Kg / 15 Lb	2u

5 INPUT CHANNELS

HOT FEATURES

- **USB CONECTION TO PC, DIRECT PLAY AND RECORD**
- **BALANCED XLR AND STEREO RCA INPUTS**
- **BIG LCD DISPLAY WITH BACKLIGHT**
- **USB/SD MP3 PLAYER**
- **BALANCED XLR OUTPUT**

SMR-5USD

COD. **12100140**

CH 1 CH2: Application Line/Phone Selectable
- Controls Trim/ Fader Volume/CUE
- HI EQ: +12dB -24dB / MID EQ: +12dB -24dB / LOW EQ:+12dB
- LED METER:Peak & Level

CH 3: Application Line/PC-USB Selectable
- Controls:Trim/ Fader Volume/CUE
- HI EQ: +12dB -24dB / MID EQ: +12dB -24dB / LOW EQ:+12dB
- LED METER:Peak & Level

CH 4: Application Line/SD-USB Selectable
- Controls:Trim/ Fader Volume/CUE
- HI EQ: +12dB -24dB / MID EQ: +12dB -24dB / LOW EQ:+12dB
- LED METER:Peak & Level

CH 5: Application Main XLR Microphone
- Controls:Level/Rotary Volume/TALK OVER
- HI EQ: +12dB -12dB - LOW EQ: +12dB -12dB
- LED METER:Peak & Level

Master Controls
- Crossfader with adjustable curve for all mixing styles / Master Fader Volume / Mixing Rotary Control between CUE & Master / Crossfader Assign A for Channels 1,2,3,4 / Crossfader Assign B for Channels 1,2,3,4 / Brake / Reverse / Reloop / Tap
- Back lighted LCD display
- Functions are displayed in a Big Screen:
- SD CARD /USB indicator / Track number/ Operating Mode / Time Mode:Elapsed- Total remaining - Remaining / Minute, Second & Frame / BPM of the track displayed / Folder / Program / Play Mode / Loop / Pepeat inidcato / Pitch / ID3 communication / Cue indicator

Outputs
- Booth: Left & Right RCA to connect the mixer to monitor
- Record: Left & Right RCA
- Master: XLR Left & Right - RCA Left & Right
- Phones: Headphones Cue Level

Specifications are subject to change without notice.



SM-65U

COD. 5100624

3 Ch. Dj Mixer

- 3 STEREO CHANNELS
- USB input
- MP3 player
- Crossfader
- Headphones output- Talkover
- 2 Mic inputs
- 3-CH CUE Send
- 5-Segment level meter

Specifications are subject to change without notice.

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
348 x 305 x 365 mm 13,7 x 12 x 14,4 In	11,1 Kg / 24,5 Lb	10u

3 INPUT CHANNELS

HOT FEATURES

- MP3 PLAYER
- SD CARD SLOT
- HEADPHONES OUTPUT



LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
384 x 310 x 280 mm 15,1 x 12,2 x 11 In	7,95 Kg / 17,5 Lb	4u

2 INPUT CHANNELS



SM-95

COD. 5100141

2 Ch. Dj Mixer

- 1-Mic Input (1.5mv/600 Ω)
- 2-Phono Input (3mv/56k Ω)
- 2-Line Input (150mv/47k Ω)
- 1-Master Output (1v/600 Ω)
- 1-Record Output (0.5v/600 Ω)
- 1-Phones Output (150mw/32 Ω)
- Frequency Response: 20-20.000 Hz (+-1dB)
- THD: < 0.05%
- S/N Ratio Line: 80dB
- 2- Eq.p/ch: Bass +12dB 60hz – Treble +12dB 10khz
- Talkover: -16dB
- Level Indicator: 2x7 LED
- Power Supply: 16V~250mA

DIMENSIONS:

6 7/16"X 8 9/16"X 3 15/16"
(164x 218x 100mm)

Specifications are subject to change without notice.

DJ MIXERS



SM-1450UI

COD. 12100140

USB in/out recording computer.

- DSP Effect: (Flanger, Flange-Verb, Phaser, Robot-Flange, Random-Pitch, Soft Scratch, Delay, Trans, Small hall, Large hall, Small Room, Medium Room, Thin Plate, Plate, Spring verb, Gate Reverb)
- Headphone Monitor Split.
- Three types of Cross Fader Curve
- Talk Over
- Peak Level Meter
- Trim: Track input level composition is available.
- Independent Monitor Switch
- Long Life Line fader (60mm) with adjustable curve, reversible.
- Extra LED display per channel for pre-listening signal.
- Gain control with 3-fold sound control (+12/-26dB) per channel.
- Mic channel 1 with 3-fold sound control (+12/-12dB), Gain, Cue & talk-over.
- Mic channel 2 with 3-fold sound control (+12/-26dB), Gain & Cue.
- 2 adjustable master outputs with balancing function
- Outputs: 2 Master (Master 1: XLR, Master 2: RCA), 1 REC: RCA, Booth Output: RCA.
- Inputs: 2 phono: RCA,4 Line:RCA, 2 MIC (MIC 1:Combi, MIC 2: 6.3 mm jack).
- Frequency range: 20Hz - 20KHz
- S7N Ratio: 80dB
- Distortion: 0.05%
- Dimensions: (W)320 x (D)350 x (H)75mm

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
160x510x185mm 6.3x20x7.3 in	7.98 Kg / 15 Lb	2u

5 INPUT CHANNELS

HOT FEATURES

- BALANCED XLR & UNBALANCED 1/4"(6.5MM) JACK INPUTS
- 0.05 %THD ULTRA LOW DISTORTION
- DSP DIGITAL EFFECTS

Specifications are subject to change without notice.





LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
348 x 305 x 365 mm 13,7 x 12 x 14,4 In	11,1 Kg / 24,5 Lb	10u

3 INPUT CHANNELS

SM-1350UI

COD. **5100140**

DJ MP3 mixer player

- Headphone Monitor Split
- Three types of Cross Fader
- Talk Over
- Peak Level Meter
- Trim: Track input level composition available
- Independent Monitor Switch
- Outputs: 2 Master (L/R), 2 Booth (L/R), 2 Rec (L/R)
- Inputs: 2 phono: RCA, 3 Line: RCA, 3 Mic: Jack
- Frequency range: 20Hz - 20KHz
- S/N ratio: 80dB
- Dimensions: (W)300x(D)255x(H)87mm

Specifications are subject to change without notice.

HOT FEATURES

- USB MP3 PLAYER
- BALANCED XLR OUTPUT
- HEADPHONES OUTPUT

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
384 x 310 x 280 mm 15,1 x 12,2 x 11 In	7,95 Kg / 17,5 Lb	10u

2 INPUT CHANNELS





SM-1250UI


COD. **5100141**

USB Mp3 player

- Headphone Monitor Split
- Three types of Cross Fader
- Talk Over
- Peak Level Meter
- Trim: Track input level composition available
- Independent Monitor Switch
- Outputs: 2 Master (1 XLR, 1 RCA), 1 Booth (RCA), 1 Rec (RCA)
- Inputs: 1 phono: RCA, 3 Line: RCA, 3 Mic: Jack, USB
- Frequency range: 20Hz - 20KHz
- S/N ratio: 80dB
- Dimensions: (W)290x(D)226x(H)117mm

Specifications are subject to change without notice.

DJ MIXERS

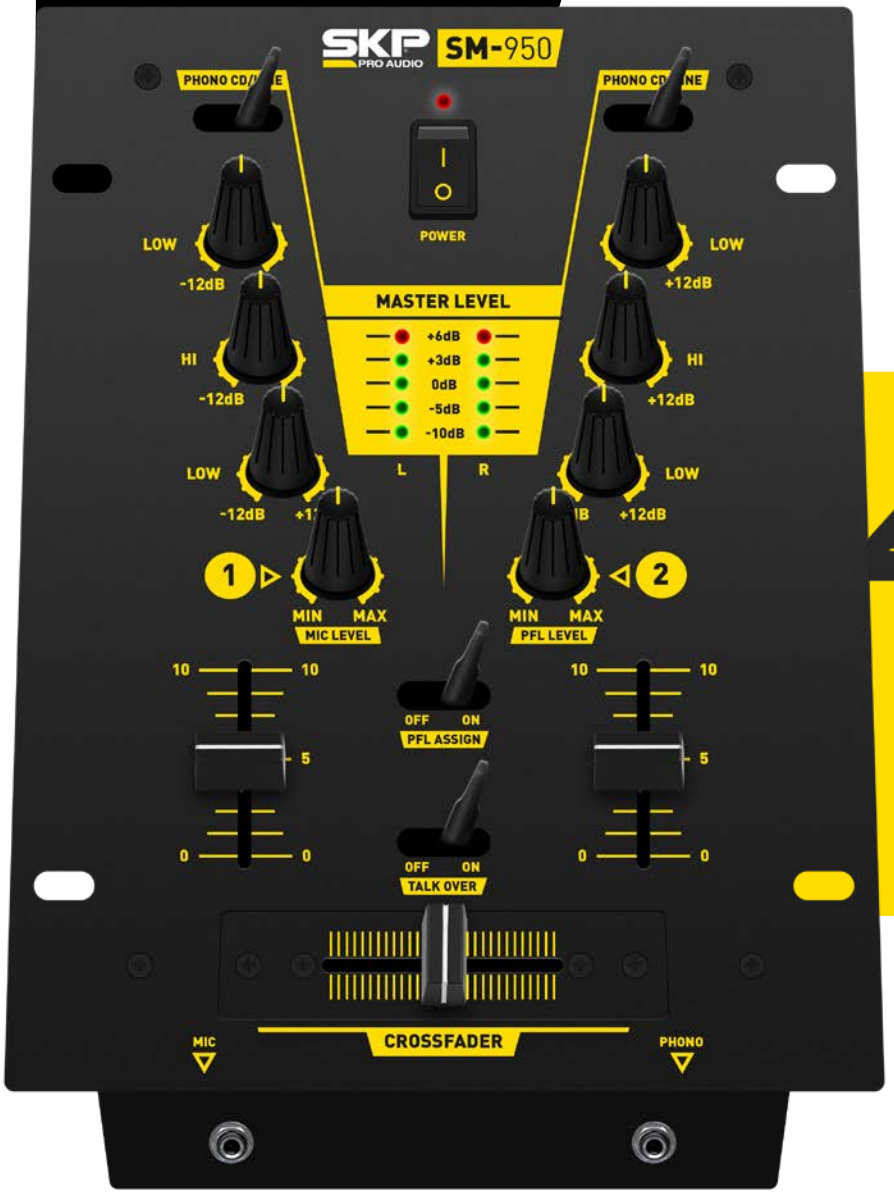

SM-950

COD. 12100140

2 Stereo input channels, with 2-way equalizer

DJ microphone channel

PFL to the stereo input channels- Replaceable crossfader for input channels


Especially easy sliding HQ faders

LED Display

HOT FEATURES

- USB POWERED
- HEADPHONES OUTPUT
- 0.003 %THD ULTRA LOW DISTORTION

Specifications are subject to change without notice.

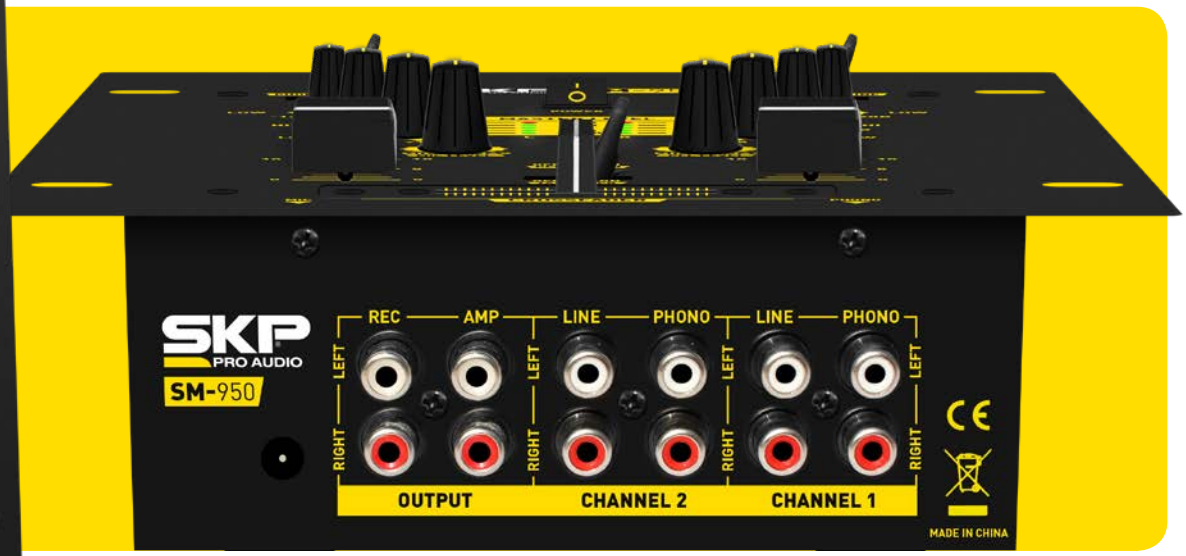

- Inputs: Mic mono 1.5v; Phone stereo 3mV; Line stereo 150mV
- Outputs: Master stereo 1V/600Ω; Record stereo 0.5V/600Ω
- Frequency range 20 - 20KHz
- S/N ratio: 61dB
- Equalizer: Bass ± 12dB/50Hz; Treble 12dB/10kHz; Talk over 16dB
- Power Supply: 12V DC - 700mA

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
160x510x185mm 6.3x20x7.3 in	7.98 Kg / 15 Lb	2u

4 INPUT CHANNELS





LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
384 x 310 x 280 mm 15,1 x 12,2 x 11 In	7,95 Kg / 17,5 Lb	4u

2 INPUT CHANNELS

SM-350MP

COD. 5100140

USB in/out

- 1 USB input/output for Playing and Recording
- 2+1 channel professional mixer.
- Headphone monitor auditioning.
- Reinforced headphone 1*1/4 jack & 1*1/8 jack output.
- Independent Monitor Switch
- Inputs: 2 RCA Line inputs, 2 RCA Turntable inputs, 1
- Mic:1/4JACK, 1 type B USB-PORT
- Outputs:2 RCA Master, 2 RCA Rec
- Freuency range :20 Hz-20 KHz
- S/N ratio: 80dB
- Dimensions:(L)150*(W)129*(H)50mm

Specifications are subject to change without notice.

HOT FEATURES

- USB POWERED
- HEADPHONES OUTPUT
- 0.003 %THD ULTRA LOW DISTORTION

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
160x510x185mm 6.3x20x7.3 in	7.98 Kg / 15 Lb	2u

5 INPUT CHANNELS

HOT FEATURES

- VIRTUAL DJ LE INCLUDED
- USB POWERED

SM-350MP

COD. 5100140

4 Mono 6.35mm microphone inputs with volume control

- Up to 50dB gain of each channel
- Digital Delay
- Mp3 Player
- Power supply: 9V Baterry or External 9V DC

Specifications are subject to change without notice.



VZ LIGHTWEIGHT SERIES

PURITY PREAMPS

- QUICK ACCESS TO ALL FUNCTIONS AND POSSIBLE CONNECTIONS. QUALITY MATERIALS AND COMPONENTS ENSURE ROBUSTNESS AND RELIABILITY WITH NEW FUNCTIONS OF DIRECT RECORDING TO USB PORT, MP3 PLAYER WITH INDIVIDUAL CONTROLS, DSP 24 BITS.

- HIGH PERFORMANCE MIC PREAMPS, CLEAR SIGNALS WITHOUT UNWANTED NOISE



6 INPUT CHANNELS

LOGISTICS INFORMATION

MASTER DIMENSIONS
411 x 511 x 618 mm
16,2 x 20,1 x 24,3 In

GROSS WEIGHT
20,09 Kg / 44,3 Lb

MASTER PIECES
8u

HOT FEATURES

- USB MEDIA PLAYER
- UP TO 6 INPUT CHANNELS
- ULTRA LIGHTWEIGHT AND PORTABLE



8 INPUT CHANNELS

LOGISTICS INFORMATION

MASTER DIMENSIONS
596 x 328 x 487 mm
23,5 x 12,9 x 19,2 In

GROSS WEIGHT
23,5 x 12,9 x 19,2 In

MASTER PIECES
4u

HOT FEATURES

- BUILT IN COMPRESSOR
- UP TO 8 INPUT CHANNELS
- 16 EFFECTS 24 BIT DSP

VZ-6.2 COD. 5100674

2 balanced XLR with phantom power (+48V)	USB Port
Ultra-low noise discrete Mic preamplifiers	Mp3 player
2 stereo channels	AUX send for monitoring/effects (post-fader)
1 stereo balance return channel	Control room and phones outputs
3-band equalizer on mono channel	Peak LEDs and stereo panning in all the channels
2-band equalizer on stereo channel	

VZ-8.2 COD. 5100675

4 balanced XLR channels with Phantom Power(+48V)	Insert I/O and built-in compressor for channels 1-2
Ultra-low noise discrete Mic preamplifiers	USB Port
Low Cut for each Mic input	MP3 Player
3 stereo channels	Aux Sends for monitoring/effects (post-fader)
1 stereo return channel	24-bits DSP with 16 internal effects
3-band Equalizer on Mic channels	Control room and phones out
2-band Equalizer on stereo channels	Peak LEDs and stereo panning in all the channels

Specifications are subject to change without notice.

VZ-12.4 / VZ-16.4

DIRECT MP3 USB RECORDING



12 INPUT CHANNELS

LOGISTICS INFORMATION

MASTER DIMENSIONS
756 x 461 x 504 mm
29,8 x 18,1 x 19,8 In

GROSS WEIGHT
21,28 Kg / 46,9 Lb

MASTER PIECES
4u

VZ-12.4 / VZ-16.4

HOT FEATURES

- **BUILT IN COMPRESSO**
- **PRE/POST SELECTABLE AUX**
- **100 EFFECTS 24 BIT DSP**
- **BIG LCD DISPLAY WITH BACKLIGHT**



16 INPUT CHANNELS

LOGISTICS INFORMATION

MASTER DIMENSIONS
756 x 561 x 504 mm
29,8 x 22,1 x 19,8 In

GROSS WEIGHT
31.2 Kg / 68 Lb

MASTER PIECES
4u

VZ-12.4

COD. 5100676

6 balanced XLR channels with Phantom Power(+48V)	Direct recording to USB/SD, without connecting a PC
Ultra-low noise discrete Mic preamplifiers	MP3 Player
Low Cut for each Mic input	24-bits DSP with 100 internal effects
4 stereo channels	Balanced XLR and TRS Output for Main Mix
1 stereo return channel	Stereo bus out (GR 1-2)
3-band Equalizer on Mic channels	Control room and phones out
2-band Equalizer on stereo channels	Peak LEDs and stereo panning in all channels
Insert I/O and built-in compressor for channels 1-4	Stereo pining in all the channels
Aux Sends for monitoring/effects (post-fader)	

VZ-16.4

COD. 5100676

8 balanced XLR channels with Phantom Power(+48V)	Direct recording to USB/SD, without connecting a PC
Ultra-low noise discrete Mic preamplifiers	MP3 Player
Low Cut for each Mic input	24-bits DSP with 100 internal effects
6 stereo channels	Balanced XLR and TRS Output for Main Mix
1 stereo return channel	Stereo bus out (GR 1-2)
3-band Equalizer on Mic channels	Control room and phones out
2-band Equalizer on stereo channels	Peak LEDs and stereo panning in all the channels
Insert I/O and built-in compressor for channels 1-4	Stereo pining in all the channels
Aux Sends for monitoring/effects (post-fader)	

Specifications are subject to change without notice.

MIX CONNECT

PURITY PREAMPS

HIGH PERFORMANCE MIC PREAMPS, CLEAR SIGNALS WITHOUT UNWANTED NOISE





LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
220x385x575mm 8.6x15x22.6in	7kg/15lb	4u

THE MIX BESIDE YOU

10 INPUT CHANNELS



HOT FEATURES

- ULTRA LIGHTWEIGHT AND PORTABLE
- 2 BAND EQUALIZER
- AUX SEND





MIX CONNECT 10

COD. 5100140

Ready to mount on a stand	2-band EQ per channel
4 balanced XLR Microphone input	4 Segment Level Indicator
48V Phantom Power	PC Interface
2 Stereo channels	1 Aux Send
5 Mono Line Inputs	Stereo Main Output
2 TK RCA Stereo Input	2TK Stereo Output
Aux Input	Phones Output

Specifications are subject to change without notice.



MIX CONNECT 8

COD. 5100640

Ready to mount on a stand	2-band EQ per channel
2 balanced XLR Microphone input	4 Segment Level Indicator
channels with 48V Phantom Power	1 Aux Send
2 Stereo channels	Stereo Main Output
4 Mono Line Inputs	2TK Stereo Output
2 TK RCA Stereo Input	Phones Output
Aux Input	









LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
215x325x575mm 8.5x12.8x22.6in	5kg/11lb	4u

8 INPUT CHANNELS





LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
225x240x575mm 8.9x9.4x22.6in	5kg/11lb	4u

6 INPUT CHANNELS

MIX CONNECT 6


COD. 5100640

2 balanced XLR Microphone input	2-band EQ per channel
channels	4 Segment Level Indicator
48V Phantom Power	Stereo Main Output
2 Stereo channels	REC Stereo Output
3 Mono Line Inputs	Phones Output
2 TK RCA Stereo Input	

Specifications are subject to change without notice.


LIVE THE MIX
EXPERIENCE
SKP
PRO AUDIO
MAIN

DIGITAL MIXING CONSOLE

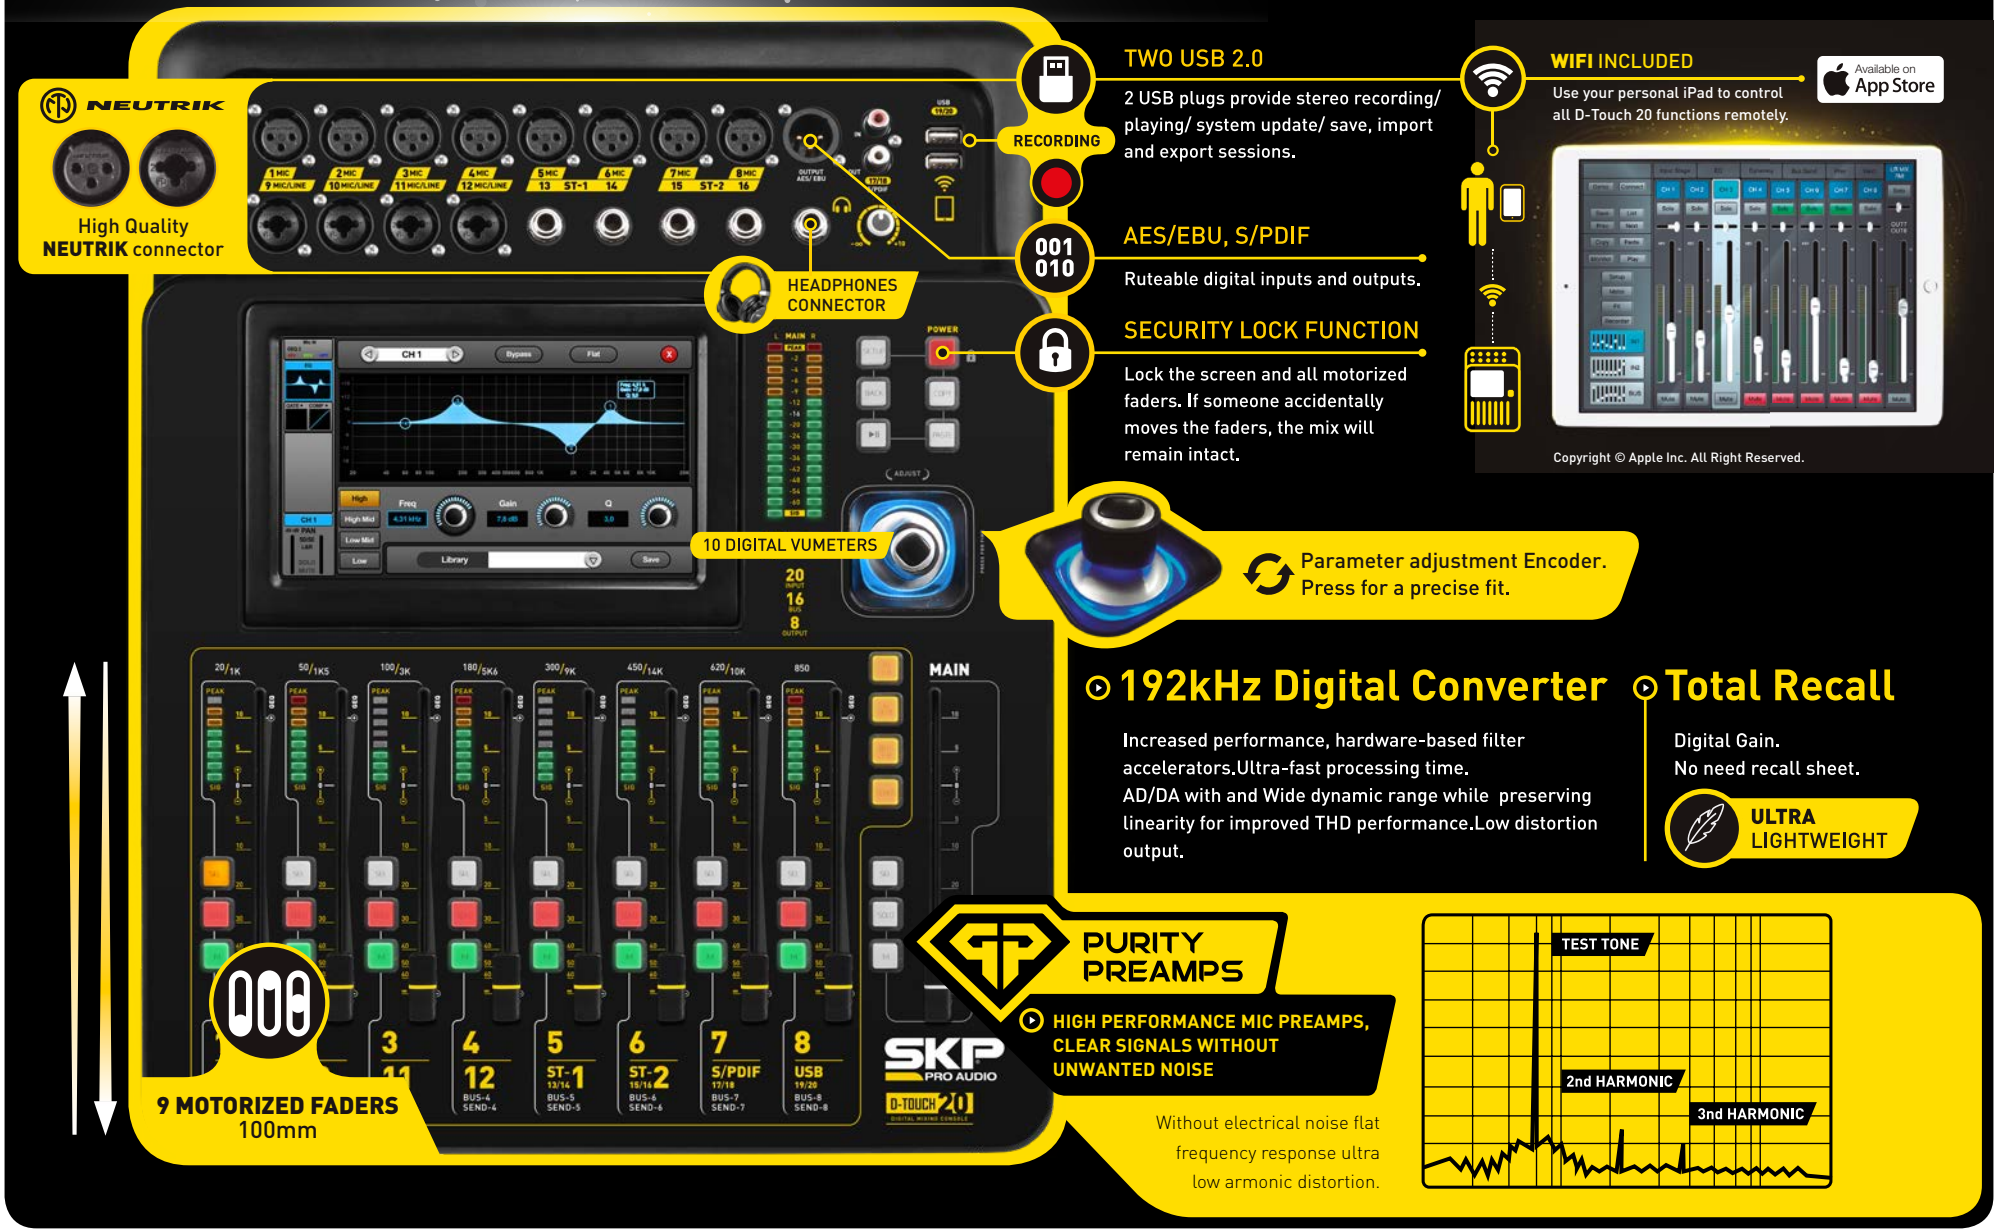

TWO USB 2.0

2 USB plugs provide stereo recording/ playing/ system update/ save, import and export sessions.

AES/EBU, S/PDIF

Ruteable digital inputs and outputs.

SECURITY LOCK FUNCTION

Lock the screen and all motorized faders. If someone accidentally moves the faders, the mix will remain intact.

WIFI INCLUDED

Use your personal iPad to control all D-Touch 20 functions remotely.

Available on App Store

Copyright © Apple Inc. All Right Reserved.

Parameter adjustment Encoder. Press for a precise fit.

192kHz Digital Converter

Increased performance, hardware-based filter accelerators.Ultra-fast processing time.
AD/DA with and Wide dynamic range while preserving linearity for improved THD performance.Low distortion output.

Total Recall

Digital Gain.
No need recall sheet.

ULTRA LIGHTWEIGHT

PURITY PREAMPS

HIGH PERFORMANCE MIC PREAMPS, CLEAR SIGNALS WITHOUT UNWANTED NOISE

Without electrical noise flat frequency response ultra low armonic distortion.


7” Touch screen built in

- FULL COLOR
- TRUE TONE DISPLAY
- HIGH DEFINITION



LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
682x475x355 mm 24.4 x 47.5 x 14 inch	30.5 kg / 67.24 lb	5u

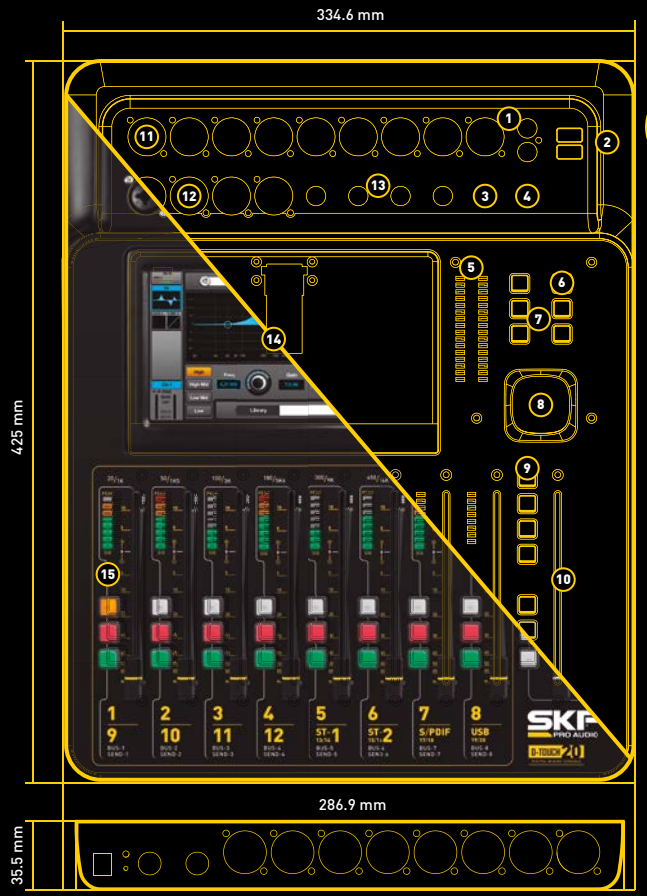

WIFI INCLUDED

20-INPUT/16-BUS/8-OUTS

1. S/PDIF IN/OUT - AES/EBU OUT
2. Two USB 2.0 interface
3. Headphone level
4. Headphone connector
5. Master out 16 band level meter
6. ON/OFF/Lock
7. Software control buttons
8. Parameter adjustment encoder
9. Layer buttons
10. Main Mix control
11. 8 channel XLR mic in Neutrik(R) connector
12. 4 channel Combo in Neutrik(R) connector
13. 2 Jack stereo in
14. 7 inch touch screen
15. Channels/buses/sends control surface



1 INTERNAL FX MODULES 4 EFFECT ENGINES

Up to 8 powerfull FX available with multiple adjustment parameters.






2 PATCH



8 assignable XLR balanced outputs

D-Touch 20 offers 16 internal buses that can be patched to the physical XLR outputs of the rear panel that the user chooses.



BUS	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Out 1	○															○
Out 2		○													○	
Out 3			○											○		
Out 4				○									○			
Out 5					○							○				
Out 6						○					○					
Out 7							○			○						
Out 8								○	○							




3 BUSES

8 output buses. Setup the output bus, D-Touch 20 allows to use EQ, FX's, Delay on each of its 4 mono buses and 4 stereo buses.
Pre/Post fader configuration.
Quick assignment, you can see in each channel the active sends and theis respective level.

DIGITAL MIXING CONSOLE

D-TOUCH 20
DIGITAL MIXING CONSOLE

- LIVE THE **EXPERIENCE** -

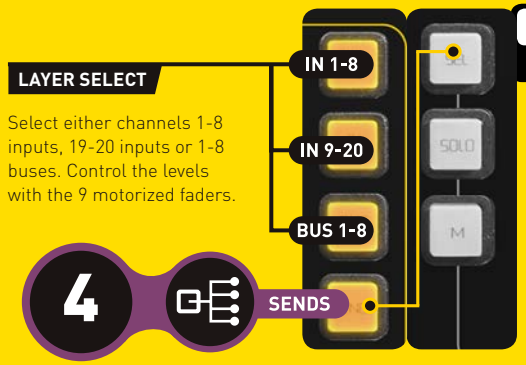

Select either channels 1-8 inputs, 19-20 inputs or 1-8 buses. Control the levels with the 9 motorized faders.

MAIN MIX CONTROL
SENDS ON FADERS

Touch and slide. Quicly send any channel to all the busses you need. Use the faders to afjust the send levels.

▸ LED color specifications





Select between 4 frequency bands, you can set any frequency, modify its amplitude +/- 18dB and vary the Q factor according to your need. Load and store EQ Presets.









INTERNAL FX MODULES

Up to 8 effect modules Modulations, reverbs, delays and graphic EQ.



PATCH

Full-configurable and customized patch way for any situation.



BUSES

Direct the signals wherever you need with 4 mono / 4 stereio Buses.



SENDS

Touch and slide. Quickly send any channel to all the busses you need



EQUALIZER

Customized equalization curve. Total frequency range control.





DYNAMIC PROCESSORS

Full-configurable Compressor and Gate. All analog inputs with dynamic processors.



In a live mix it is very important to control the dynamics of each signal D-Touch 20 allows to use Compressors, and Gates with full-configurable parameters.



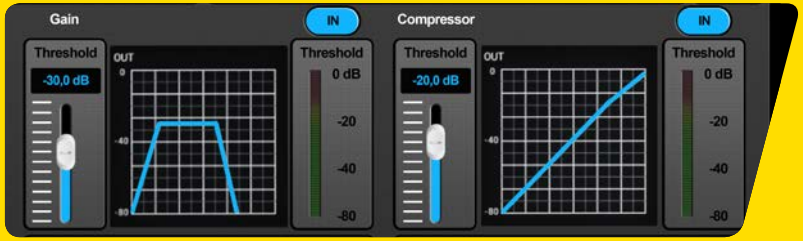

- 12 mic input with Purity Preamps and +48V Phantom Power
- 2 Stereo TRS input
- S/PDIF I/O - AES/EBU output
- USB Stereo Input/ USB Stereo Recording
- Digital Gain. Total Recall
- High Qualiy Professional Neutrik® Connectors
- 16 buses
- 8 assignable XLR output connectors
- Stereo monitor output connector/ Headphone output
- AD/DA up to 192kHz
- 7" 1024px IPS Touchscreen
- Screen adjustable angle/ Capacitive display
- Total Lock Security Function
- 9 Motorized faders 100mm/ Send on Fader
- 10 Digital Vumeter
- 8 internal effect modules Modulation/Delay/ Reverb/ Graphic EQ
- Phase Inverter/Input Delay
- Compressor/ Side Chain/ Gate/ Full-Parametric EQ
- Wifi USB / iPad remote control



LET THE MUSIC SPEAK

LEGACY SERIES



SET THE MIX IN A RUGGED WAY

PURITY PREAMPS
HIGH PERFORMANCE MIC PREAMPS, CLEAR SIGNALS WITHOUT UNWANTED NOISE

Bluetooth®

32 INPUT CHANNELS

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
756 x 561 x 504 mm 29,8 x 22,1 x 19,8 In	31.2 Kg / 68 Lb	4u

LEGACY 32

COD. 5100676

Heavy duty aluminium construction	2 Selectable Hi Z electric guitar input	Dual 16 DSP Effects with display
30 balanced XLR Microphone input channels with 48V	PFL and Mute function per channel	10 Segment LED level indicator
Phantom Power	Direct USB REC	5 Aux Send
2 Stereo channels	PC Interface	2 Subgroup
3-band Semi Parametric EQ per channel	Lamp USB Port	Balanced Stereo Main Output
7-band Graphic EQ on Master	MP3 Player Assignable to Stereo Channel	Subgroup Output

HOT FEATURES

- MP3 — USB MP3 PLAYER
- DUAL DSP — DUAL DIGITAL SIGNAL PROCESSOR
- AUX — PRE/POST AUX
- 48V PH — 48V PHANTOM PHANTOM POWER

Specifications are subject to change without notice.

MIXER FX

PURITY PREAMPS

HIGH PERFORMANCE MIC PREAMPS, CLEAR SIGNALS WITHOUT UNWANTED NOISE



HOT FEATURES

- USB MP3 PLAYER
- DUAL DIGITAL SIGNAL PROCES
- SOR
- PRE/POST AUX
- 48V PHANTOM PHANTOM POW
- ER
- Bluetooth®





MULTITRACK 24 INPUT CHANNELS

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
756 x 561 x 504 mm 29,8 x 22,1 x 19,8 In	31.2 Kg / 68 Lb	4u

LEGACY 24

COD. 5100676

Heavy duty aluminium construction	2 Selectable Hi Z electric guitar input	MP3 Player Assignable to Stereo Channel
20 balanced XLR Microphone input channels with 48V	PFL and Mute function per channel	Dual 16 DSP Effects with display
Phantom Power	USB	10 Segment LED level indicator
2 Stereo channels	Direct USB REC	5 Aux Send
3-band Semi Parametric EQ per channel	PC Interface	2 Subgroup
7-band Graphic EQ on Master	Lamp USB Port	Balanced Stereo Main Output

Specifications are subject to change without notice.

MIXER FX

PURITY PREAMPS

HIGH PERFORMANCE MIC PREAMPS, CLEAR SIGNALS WITHOUT UNWANTED NOISE



HOT FEATURES

- USB MP3 PLAYER
- DUAL DIGITAL SIGNAL PROCESSOR
- PRE/POST AUX
- 48V PHANTOM PHANTOM POWER

Bluetooth®





DIRECT MP3 USB RECORDING

20 INPUT CHANNELS

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
756 x 561 x 504 mm 29,8 x 22,1 x 19,8 In	31.2 Kg / 68 Lb	4u

LEGACY 20

COD. 5100676

Heavy duty aluminium construction	2 Selectable Hi Z electric guitar input	MP3 Player Assignable to Stereo Channel
16 balanced XLR Microphone input channels with 48V	PFL and Mute function per channel	Dual 16 DSP Effects with display
Phantom Power	USB	10 Segment LED level indicator
2 Stereo channels	Direct USB REC	4 Aux Send
3-band Semi Parametric EQ per channel	PC Interface	2 Subgroup
7-band Graphic EQ on Master	Lamp USB Port	Balanced Stereo Main Output

Specifications are subject to change without notice.

MIXER PRO

PURITY PREAMPS

HIGH PERFORMANCE MIC PREAMPS, CLEAR SIGNALS WITHOUT UNWANTED NOISE




HOT FEATURES

- LARGE CAPACITORS PROVIDE STORAGE OF BASS
- DIRECT MP3 USB RECORDING
- SPEAKON POWERED OUTPUT
- 24 BIT DSP

Bluetooth®



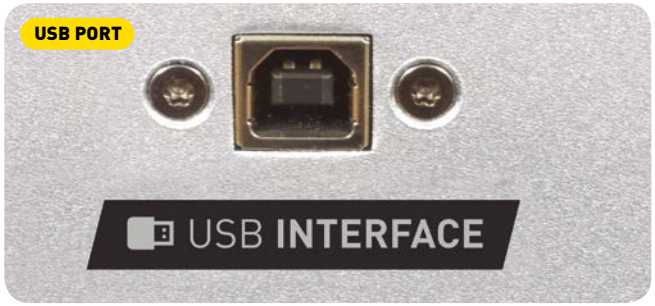

DIRECT MP3 USB RECORDING

16 INPUT CHANNELS

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
756 x 561 x 504 mm 29,8 x 22,1 x 19,8 In	31.2 Kg / 68 Lb	4u

LEGACY 16

COD. 5100676

Heavy duty aluminium construction	2 Selectable Hi Z electric guitar input	MP3 Player Assignable to Stereo Channel
12 balanced XLR Microphone input channels with 48V	PFL and Mute function per channel	Dual 16 DSP Effects with display
Phantom Power	USB	10 Segment LED level indicator
2 Stereo channels	Direct USB REC	4 Aux Send
3-band Semi Parametric EQ per channel	PC Interface	2 Subgroup
7-band Graphic EQ on Master	Lamp USB Port	Balanced Stereo Main Output

Specifications are subject to change without notice.

Bluetooth®



MULTITRACK

12 INPUT CHANNELS

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
756 x 561 x 504 mm 29,8 x 22,1 x 19,8 In	31.2 Kg / 68 Lb	4u

LEGACY 12

COD. 5100676

Heavy duty aluminium construction	2 Selectable Hi Z electric guitar input	MP3 Player Assignable to Stereo Channel
8 balanced XLR Microphone input channels with 48V	PFL and Mute function per channel	16 DSP Effects with display
Phantom Power	USB	10 Segment LED level indicator
2 Stereo channels	Direct USB REC	2 Aux Send
4-band EQ per channel	PC Interface	Balanced Stereo Main Output
7-band Graphic EQ on Master	Lamp USB Port	Phones Out

Specifications are subject to change without notice.

DIRECT MP3 USB RECORDING



Bluetooth®

DIRECT MP3 USB RECORDING

10 INPUT CHANNELS

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
756 x 561 x 504 mm 29,8 x 22,1 x 19,8 In	31.2 Kg / 68 Lb	4u

LEGACY 10

COD. 5100676

Heavy duty aluminium construction	2 Selectable Hi Z electric guitar input	MP3 Player Assignable to Stereo Channel
6 balanced XLR Microphone input channels with 48V	PFL and Mute function per channel	16 DSP Effects with display
Phantom Power	USB	10 Segment LED level indicator
2 Stereo channels	Direct USB REC	2 Aux Send
4-band EQ per channel	PC Interface	Balanced Stereo Main Output
7-band Graphic EQ on Master	Lamp USB Port	Subgroup Output

Specifications are subject to change without notice.


POWERED MIXER

MAX POWER
2000W

PURITY PREAMPS

HIGH PERFORMANCE MIC PREAMPS, CLEAR SIGNALS WITHOUT UNWANTED NOISE

USB INTERFACE

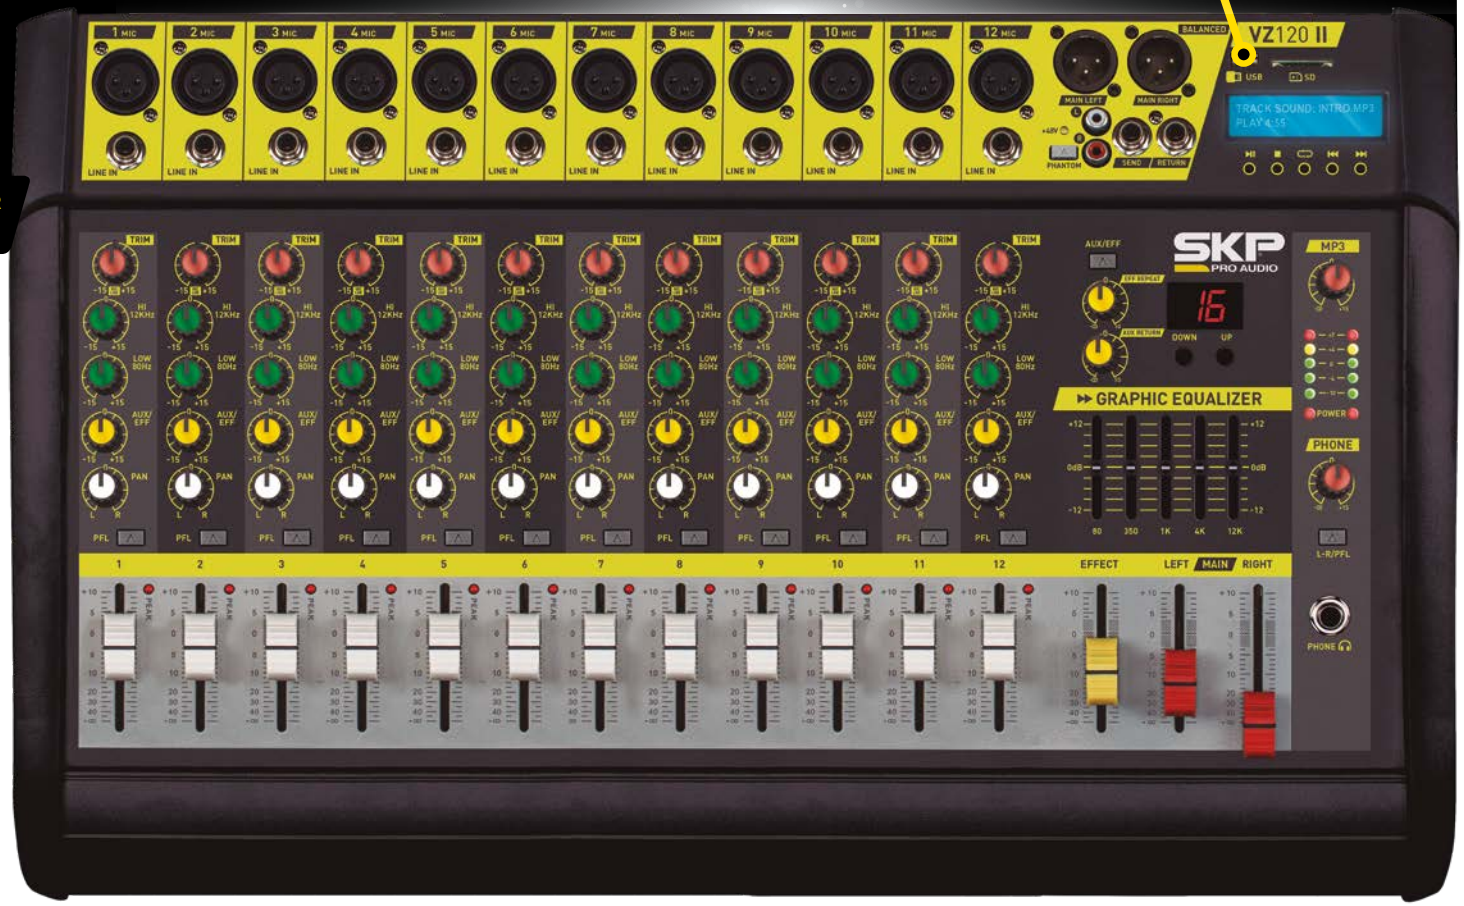

DIRECT MP3 USB RECORDING

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
600x425x435 mm 23.6x 16.7x17.1 in	23 kg 50 lb	2u

12 XLR INPUT CHANNELS

Bluetooth®

HOT FEATURES

- LARGE CAPACITORS PROVIDE STORAGE OF BASS
- SPEAKON POWERED OUTPUT
- DIRECT MP3 USB RECORDING
- 24 BIT DSP

VZ 120 II

COD. 5100623

RMS Stereo power Output 250W + 250W @ 4Ω	2-band EQ on all Channels	Highly accurate 5 segment Bar-graph Meters
12 Mono Input Channels with gold XLR and balanced Line Inputs	Peak LED all Channels	Separate Master Mix Outputs
Ultra-low noise discrete Mic Preamps with +48V Phantom Power	PFL Function	5-Band Graphic Equalizer
Extremely high headroom – offering more dynamic range	Aux Send per Channel for external effects and monitoring	AC 110/220V 60-50Hz
Balanced inputs for Highest signal integrity	16-Digital Delay System inside	

Specifications are subject to change without notice.



DIRECT MP3 USB RECORDING



LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
410*356*435 mm / 16.1x14x17.1 in	16 kg / 35 lb	2u

MAX POWER **1600W** | **4 INPUT** CHANNELS

VZ-40 II

COD. 5100620

RMS Stereo power Output 200W + 200W @ 4Ω.

- 4 Mono Input Channels with XLR and balanced Line Inputs
- Ultra-low noise discrete Mic Preamps with +48V Phantom Power
- Extremely high headroom – offering more dynamic range
- Balanced inputs for Highest signal integrity
- 2-band EQ on all Channels
- Peak LED all Channels
- PFL function
- Aux Send per Channel for external effects and monitoring
- 16-Digital Delay System inside
- Highly accurate 5 segment Bar-graph Meters
- Separate Master Mix Outputs
- 5-Band Graphic Equalizer



DIRECT MP3 USB RECORDING



LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
420x425x435 kg / 16.5x16.7x17.1 in	17 kg / 37 lb	2u

MAX POWER **1600W** | **6 INPUT** CHANNELS

VZ-60 II

COD. 5100621

RMS Stereo power Output 200W + 200W @ 4Ω.

- 6 Mono Input Channels with gold XLR and balanced Line Inputs
- Ultra-low noise discrete Mic Preamps with +48V Phantom Power
- Extremely high headroom – offering more dynamic range
- Balanced inputs for Highest signal integrity
- 2-band EQ on all channels
- Peak LED all Channels
- PFL function
- Aux Send per channel for external effects and monitoring
- 16-Digital Delay System inside
- Highly accurate 5 segment Bar-graph Meters
- Separate Master Mix Outputs
- 5-Band Graphic Equalizer



DIRECT MP3 USB RECORDING

Bluetooth®



LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
540x425x435 mm / 21.3x16.7x17.1 in	21 kg / 46 lb	2u

MAX POWER **2000W** | **10 INPUT** CHANNELS

VZ-1000 II


COD. 5100622

RMS Stereo power Output 250W + 250W @ 4Ω.

- 10 Mono Input Channels with gold XLR and balanced Line Inputs
- Ultra-low noise discrete Mic Preamps with +48V Phantom Power
- Extremely high headroom – offering more dynamic range
- Balanced inputs for Highest signal integrity
- 2-band EQ on all channels
- Peak LED all Channels
- PFL function
- Aux Send per Channel for external effects and monitoring
- 16-Digital Delay System inside
- Highly accurate 5 segment Bar-graph Meters
- Separate Master Mix Outputs
- 5-Band Graphic Equalizer

Specifications are subject to change without notice.

POWERED MIXER

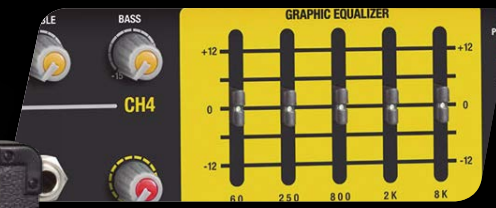





HOT FEATURES

- USB/SD MP3 PLAYER
- 5 BAND GRAPHIC EQUALIZER
- DIGITAL EFFECTS



CRX 825 USB

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
580 x 495 x 700 mm 22,8 x 19,5 x 27,6 In	27,5 Kg / 60,6 Lb	1u

MAX POWER **1000W**

CRX 825 USB

COD. **5101003**

Microphone Input	Balanced XLR
Microphone input impedance	1KΩ (balanced)
Line input	Type ¼¨ TRS balanced
Line input impedance	10KΩ (balanced)
Main Output	Type ¼¨ TRS balanced
Frequency response	20Hz - 20KHz ± 3dB
EQ by channel	Bass 80Hz ±15dB
	Treble 12KHz ±15dB
EQ Master	±12dB centered in the bands of 60Hz, 250Hz, 800Hz, 2kHz y 8kHz
MP3 Player	
Compatible audio formats	MP3, WAV, WMA
Peak power	1000W
RMS power	250W @ 4Ω
Min. Charge Impedance per channel	4 Ω
Power supply	110V/220V ~ 60Hz/50Hz
Energy Consumption	500W



Bluetooth®

CRX SERIES **POWERED MIXERS**

These powered mixers with built in amplifier, are very versatile and can be used conveniently in places like live halls, places of worship, clubs, conferences halls, bars, schools, churches, etc

Specifications are subject to change without notice.



CRX 415 USB

COD. 5101001

Microphone Input	Balanced XLR
Microphone input impedance	1 kΩ (balanced)
Line input	Type ¼¨ TRS balanced
Line input impedance	10kΩ (balanced)
Main Output	Type ¼¨ TRS balanced
Frequency response	20Hz- 20kHz ± 3dB
EQ by channel	Bass 80 Hz ±15dB
	Treble 12kHz ±15dB
MP3 Player	
Compatible audio formats	MP3, WAV, WMA
Peak power	600 W
RMS power	150W @ 4 Ω
Min. Charge Impedance per channel	4 Ω
Power supply	110V/220V ~ 60Hz/50 Hz
Energy Consumption	300 W



CRX 620 USB

COD. 5101002

Microphone Input	Balanced XLR
Microphone input impedance	1KΩ (balanced)
Line input	Type ¼¨ TRS balanced
Line input impedance	10KΩ (balanced)
Main Output	Type ¼¨ TRS balanced
Frequency response	20Hz- 20KHz ±3dB
EQ by channel	Bass 80Hz ±15dB
	Treble 12KHz ±15dB
EQ Master	±12dB centered in the bands of 60Hz
	250Hz, 800Hz, 2KHz y 8KHz
MP3 Player	
Compatible audio formats	MP3, WAV, WMA
Peak power	800W
RMS power	200W @ 4Ω
Min. Charge Impedance per channel	4Ω
Power supply	110V/220V ~ 60Hz/50Hz
Energy Consumption	400W

Specifications are subject to change without notice.



YOUR SOUND EVERYWHERE

PORTABLE SOUND SYSTEM

SYSTEM INCLUDEDS

2 SPEAKERS 1 POWERED MIXER

MAX POWER 1600W



DETACHABLE POWERED MIXER

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
540 x 480 x 1155 mm 21,3 x 18,9 x 45,5 In	37 Kg / 81,6 Lb	1u

8 INPUT CHANNELS

HOT FEATURES

- 8 CHANNELS INPUT
- CLASS D AMPLIFIER
- USB MP3 PLAYER
- LIGHTWEIGHT AND PORTABLE

SK 210MA

COD. 5110099

MIXER	
MONO inputs	(4) 2x line/mic in (xlr) + 2x line/mic in (combo)
STEREO inputs	(2) 1x line in (2x jack/rca) + 1x line in (2x rca)
EQ	High 10khz (±15db), low 100hz (±15db)
PHANTOM power	+15v ch1-2
Internal Effect	Reverb (ch1-4)
Outputs	Monitor out (2x jack), sub out (1x jack),
Speaker Out	(2x jack)
Main	EQ speech/music selector
Metering	6 led vu-meter
MULTIMEDIA	
Player Type	USB player
Compatible Files	WAV, MP3, WMA
AMPLIFIER	
Amplifier Type	CLASS D
RMS Power	2x200W @4Ω
Frequency Response	MUSIC: 20Hz - 20KHz, SPEECH: 80Hz - 20KHz
LOUDSPEAKER	
Loudspeaker System	2-way system vented
High Frequency Device	1" compression driver 1.35" VC – horn loaded
Low Frequency Device	10"woofer with 2" VC
Angular Coverage	90° H x 60° V
Impedance	4Ω
Frequency Response	65Hz - 20KHz, (±10dB)
Construction	Black Polypropylene, Metal Grille
GENERAL	
Power Supply	110/220V~60/50Hz

Specifications are subject to change without notice.

PORTABLE SOUND SYSTEM

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
540 x 480 x 1155 mm 21,3 x 18,9 x 45,5 In	37 Kg / 81,6 Lb	1u

MAX POWER 700W

SYSTEM INCLUDEDS

2 SPEAKERS
1 POWERED MIXER



HOT FEATURES

- 6 CHANNELS INPUT
- CLASS D AMPLIFIER
- LIGHTWEIGHT AND PORTABLE
- 2 BAND EQUALIZER

Bluetooth®



SK 207

COD. 5110099

MIXER AMPLIFIER

Inputs	6 channels
	2 mic/line (XLR/TRS)
	2 stereo selectable front AUX inputs (1/8" / 1/4" / RCA)
	1 stereo preamp input
Outputs	Powered (L/R) / FX passive output
Power Output	175W RMS
EQ	Bass and treble EQ per channel
AUX	AUX level control per channel
Power Supply	115/230V 60/50Hz
Features	Class D amplifier and switching power design
	LED power / signal / clip

SPEAKER

Type	2 way vented design
Frequency response	90Hz - 20Khz
Sensitivity	92dB/m/W
Impedance	8Ω
Driver	2x3"Mid-Hi driver
	6.5" Bass woofer driver
Connector	1/4" jack
Cabinet	Molded Black Polypropylene cabinet whit handle
Grill	steel whit foam inside
Pole	35mm stand pole

Specifications are subject to change without notice.

POWERED MIXER

SYSTEM INCLUDES
2 SPEAKERS 1 POWERED MIXER

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
700 x 395 x 570 mm 27,6 x 15,6 x 22,4 In	22 Kg / 48,5 Lb	1u

600 PEAK POWER



COMBO IV USB

COD. 5100980

RMS Power 150W @ 4Ω

- Internal effects (Delay / Reverb)
- Built-in MP3 Player
- Compatible with MP3, WAV and WMA files
- 2 bands Equalizer per channel
- 4 XLR channels with Phantom Power (+15V)
- 2 Auxiliar Inputs
- Effect Loop
- Powered to connect directly to the speakers
- 2 x 2-way 10¨ speakers

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
520 x 475 x 775 mm 20,5 x 18,7 x 30,5 In	22 Kg / 48,5 Lb	1u

600 PEAK POWER



COMBO VI USB

COD. 5100981

RMS Power 200W @ 4Ω

- Internal effects (Delay / Reverb)
- Built in MP3 player with display
- Compatible with MP3, WAV and WMA files
- 2 bands Equalizer per channel
- 5 bands Graphic Equalizer for the Master
- 6 XLR channels with Phantom Power (+15V)
- 2 stereo balanced channels
- 2 Auxiliar Inputs
- Effect Loop
- Powered to connect directly to the speakers
- 2 x 2-way 12¨ speakers

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
520 x 475 x 775 mm 20,5 x 18,7 x 30,5 In	22 Kg / 48,5 Lb	1u

600 PEAK POWER



COMBO VIII USB

COD. 5100982

RMS Power 250W @ 4Ω

- Internal effects (Delay / Reverb)
- Built in MP3 player with display
- Compatible with MP3, WAV and WMA files
- 2 bands Equalizer per channel
- 5 bands Graphic Equalizer for the Master
- 8 XLR channels with Phantom Power (+15V)
- 2 stereo balanced channels
- 2 Auxiliar Inputs
- Effect Loop
- Powered to connect directly to the speakers
- 2 x 2-way 15¨ speakers

Specifications are subject to change without notice.


YOUR VOICE
IN ITS MAXIMUM
EXPRESSION



BAG INCLUDED

HOT FEATURES

- CARDIOID POLAR PATTERN
- DYNAMIC MICROPHONE

LOGISTICS INFORMATION

MASTER DIMENSIONS
525 x 270 x 440 mm
20,7 x 10,6 x 17,3 In

GROSS WEIGHT
13,3 Kg / 29,3 Lb

MASTER PIECES
20u



HOT FEATURES

- CARDIOID POLAR PATTERN
- DYNAMIC MICROPHONE
- ON/OFF SWITCH

LOGISTICS INFORMATION

MASTER DIMENSIONS
485 x 295 x 360 mm
19,1 x 11,6 x 14,2 In

GROSS WEIGHT
17,6 Kg / 38,8 Lb

MASTER PIECES
20u







BOX INCLUDED

HOT FEATURES

- SUPER CARDIOID POLAR PATTERN
- DYNAMIC MICROPHONE
- ON/OFF SWITCH

LOGISTICS INFORMATION

MASTER DIMENSIONS
420 x 265 x 390 mm
16,5 x 10,4 x 15,4 In

GROSS WEIGHT
11 Kg / 24,3 Lb

MASTER PIECES
10u



COD. **5102376**
WHITE





BOX INCLUDED

HOT FEATURES

- SUPER CARDIOID POLAR PATTERN
- DYNAMIC MICROPHONE

LOGISTICS INFORMATION

MASTER DIMENSIONS
420 x 265 x 390 mm
16,5 x 10,4 x 15,4 In

GROSS WEIGHT
11 Kg / 24,3 Lb

MASTER PIECES
10u



PRO-57XLR COD. **5102352**	**PRO**-58XLR COD. **5102356**	**PRO**-92XLR COD. **5102375**	**PRO**-100XLR COD. **5102373**
Professional Instrument Microphone	Professional Microphone	Professional Microphone	Professional Microphone
Type: Dynamic	Type: Dynamic	Type: Dynamic	Type: Dynamic
Polar pattern: Cardioid	Polar pattern: Cardioid	Polar pattern: Supercardioid	Polar pattern: Supercardioid
Frequency reponse: 60Hz to 16KHz	Frequency response: 60Hz to 16KHz	Frequency response: 50Hz to 16KHz	Frequency response: 50Hz to 16KHz.
Output Impedance: 600Ω	Output Impedance: 600Ω	Output Impedance: 600Ω	Output Impedance: 300Ω
Sensitivity: -77dB	Sensitivity: -77dB	Sensitivity: -72dB	Sensitivity: -49dB
Cable:17 t (5M) XLR to TS	Ouput: Balanced	Ouput: Balanced	Ouput: Balanced
Packaging: Cardboard box	Cable: 17ft (5m) XLR to XLR	Cable: 17ft (5m) XLR to XLR	Cable: 20ft (6m) XLR to XLR
Body: Metallic	Packaging: Cardboard box	Packaging: Plastic and rigid case	Packaging: Case
	Body: Metallic	Body: Metallic	Body: Metallic

Specifications are subject to change without notice.

MICROPHONES

A COMPLETE FAMILY OF PROFESSIONAL DYNAMIC MICROPHONES

EVERY SINGER OR BAND WANTS TO SOUND **THEIR BEST ON STAGE**



XLR TO TS 1/4" INCLUDED

(PRO-20, PRO-40)



(PRO-35XLR,PRO-57XLR, PRO-58XLR,PRO-90XLR, PRO-100XLR)



PRO-20 COD. 5102349	**PRO**-35XLR COD. 5102377	**PRO**-40 COD. 5102378
Professional Microphone	Professional Microphone	Professional Microphone
Type: Dynamic	Type: Dynamic	Type: Dynamic
Polar pattern: Cardioid	Polar pattern: Cardioid	Polar pattern: Cardioid
Frequency response: 50Hz to 16KHz	Frequency response: 50Hz to 16KHz	Frequency response: 50Hz to 16KHz
Output Impedance:600Ω ±30% (at 1KHz)	Output Impedance: 600Ω	Output Impedance:600Ω ±30% (at 1KHz)
Sensitivity: -75dB (at 1KHz)	Sensitivity: -75dB (at 1KHz)	Sensitivity: -75dB (at 1KHz)
Cable: 17ft (5m) XLR to TS	Ouput: Balanced	Cable: 17ft (5m) XLR to TS
Connector: XLR	Cable: 17ft (5m) XLR to XLR	Connector: XLR
Packaging: Plastic box	Packaging: Plastic and rigid case	Packaging: Plastic box
Body: Metallic	Body: Metallic	Body: Metallic

Specifications are subject to change without notice.

- Style and proffesional performance for legislative chambers, houses of praise & worship and conference rom.





INTERIOR CAPSULE

SCREW ADAPTER



PRO-33K

COD. 5102349

Professional Microphone

Type: Dynamic
Polar pattern: Cardioid
Frequency response: 50 Hz to 16 KHz
Output Impedance:600 Ohm ±30% (at 1KHz)
Packaging: Plastic box
Body: Metallic

Specifications are subject to change without notice.

HOT FEATURES

- CARDIOID POLAR PATTERN
- DYNAMIC MICROPHONE

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
500x440x380mm 19.7x17.3x15in	11.5 kg / 25.4 lb	25u

CASE INCLUDED

STUDIO MICROPHONES

TRUE SOUND

FOR RECORDING STUDIO
AND STAGE PERFORMANCE

SKS -420

COD. 5102516

The SKS 420, a microphone designed for the most exigent musicians and sound engineers. Meant to professional recording studios and home studio, the SKS 420 becomes essential by high sensitivity and flat frequency response for recording voices and multiple instruments thanks to its multiple polar pattern, omnidirectional, figure 8 and cardioid. For larger signals at 130dB SPL has an attenuator - 10dB and low cut at 80Hz.

- Transducer Principle: Dual, True Condenser
- Diaghragm: Gold-plating
- Directivity: Cardioid, 20Hz-20KHz
- Sensitivity: -33/-39/-38dB (0dB=1V/Pa at 1 KHz)
- Equivalent Noise Level: <12dBA
- Max. Input SPL: 130dB (THD <1%at 1KHz)
- Sensitivity Attenuation: -10dB
- Output Impedance: 58Ω
- Power Requirements: 48V DC Phantom Power
- Bass Filter: 10dB/octave at 80Hz



SH1

INCLUDED

The SH-1 Super Shock Mount is a heavy-duty elastic suspension system. This mounting basket fits the SK-220 and SK-420, and many other condenser microphones. It features excellent stand and noise/vibration reduction.

HOT FEATURES

- DUAL LARGE DIAPHRAGM TRUE CONDENSER
- SWITCHABLE HIGH PASS FILTER
- THREE SELECTABLE POLAR PATTERNS
- 12 dBA LOW NOISE ELECTRONICS FOR HIGH DYNAMIC RANGE

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
345 x 525 x 495 mm 13,6 x 20,7 x 19,5 In	16,9 Kg / 37,3 Lb	8u

TRUE CONDENSER

LARGE-DIAPHRAGM

TRUE CONDENSER MICROPHONE FOR PROFESSIONAL STUDIO RECORDINGS. EXCEPTIONAL FLAT FREQUENCY RESPONSE AND ULTRA-HIGH SOUND RESOLUTION.

SKS-220 COD. 5102515

Large-diaphragm condenser microphone.

High sensitivity and a flat frequency response make that microphone be an essential tool for the studio recording and home studio. Supports 135dB maximum sound pressure level and it's a versatile microphone for recording both vocals and instruments.
Built-in high resistant material.

- Frequency Response: 20Hz-20KHz
- Sensitivity: -35dB
- Directivity: Cardioid
- Equivalent Noise Level: <24dB (IEC 581-5)
- Maximum SPL Input: 135dB (at 1KHz THD < 1%)
- Output Impedance: <100Ω
- Load Impedance: >1000Ω
- Phantom Power Requirements: 48V DC





HOT FEATURES

- LARGE DIAPHRAGM TRUE CONDENSER
- CARDIOID POLAR PATTERN
- 24 dBA LOW NOISE ELECTRONICS FOR HIGH DYNAMIC RANGE

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
452 x 535 x 418 mm 17,8 x 21,1 x 16,5 In	19,5 Kg / 43 Lb	20u

DIRECTIVITY **CARDIOID**



RF-30 STUDIO COD. 5110220

REFLEXION FILTER

Absorption surface	High density acoustic foam
Costruction	Aluminum
Dimensions	(W)10" (H)12" (D)3"
Weight	1.9lb

Specifications are subject to change without notice.

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
500x440x380mm 19.7x17.3x15in	11.5 kg / 25.4 lb	25u



RF-20 PRO COD. 5110220

REFLEXION FILTER

Absorption surface	High density acoustic foam
Costruction	Aluminum
Dimensions	(W)10" (H)12" (D)3"
Weight	1.9lb

Specifications are subject to change without notice.

LOGISTICS INFORMATION


MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
500x440x380mm 19.7x17.3x15in	11.5 kg / 25.4 lb	25u



YOUR ACOUSTIC SOUND

LIMITLESS CONNECTIVITY

STEP 1
INSTRUMENT

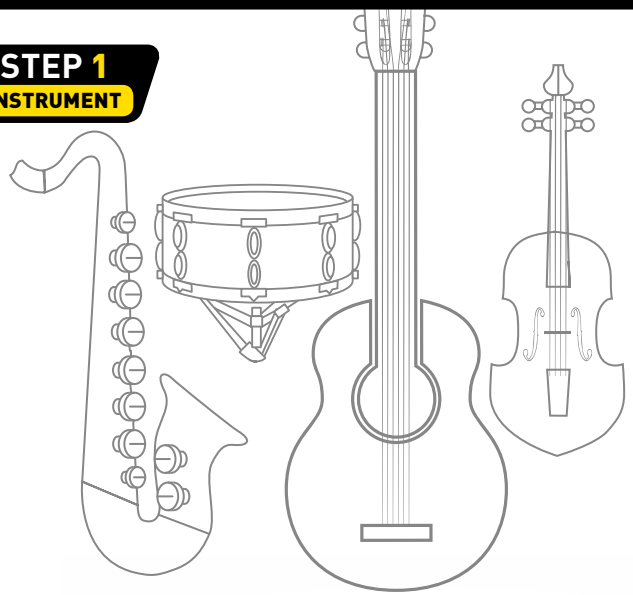

STEP 2
MICROPHONE



STEP 3
ADAPTATOR



LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
500 x 440 x 380 mm / 19,7 x 17,3 x 15 In	7,5 Kg / 16,8 Lb	50u



PPS 48
COD. 5110080
MASTER PIECES 50U

MICROPHONE **PREAMPS AND POWER SUPPLY.**

STANDARD **XLR** / MINI **XLR**

SKP / **A1** SHU / **A2** SEN / **A3** AKG

LIMITLESS CONNECTIVITY

Adapters that fulfill the function to make the connection possible to other such marks like Shure, Sennheiser and AKG.

INSTRUMENT MICROPHONES



LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
500x440x380mm 19.7x17.3x15in	11.5 kg / 25.4 lb	25u

PRO 518D

COD. 5102381

Element:	Condenser
Polar pattern:	Super-cardioid
Cartridge size:	Φ9.7*5.0mm
Sensitivity:	- 47dB
Frequency response:	50Hzto - 2KHz
Output impedance:	≤680KΩ
Working voltage:	Phantom 48V or DC 1.5V- 10V
Signal-to-noise ratio:	>58dB
Cable length:	5m
Connector:	3.5mm screw plug

Miniature supercardioid condenser microphone is designed for percussion, snares, toms and surdos in both stage and studio applications.









LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
500x440x380mm 19.7x17.3x15in	8.5 kg / 18.7 lb	50u

PRO 519W


COD. 5102382

Element:	Condenser
Polar pattern:	Cardioid
Sensitivity:	- 45db
Frequency response:	20Hz to 20KHz
Output impedance:	≤680 K Ω
Working voltage:	DC 1.5V- 10V
Signal-to-noise ratio:	78dB
Cable length:	3m
Connector:	3.5mm screw plug

Specifications are subject to change without notice.

Clip and cartridge connection have vibration protection, prevent the mechanical noise. The gooseneck neck position can be adjusted as needed.



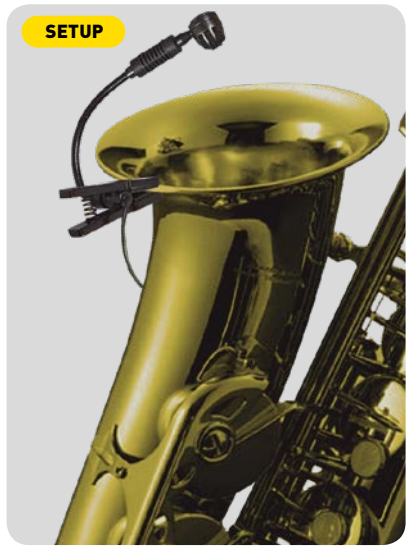

INSTRUMENT MICROPHONES



LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
500x440x380mm 19.7x17.3x15in	9.5 kg / 21.4 lb	25u

PRO 517G

COD. **51023810**

Element:	Condenser
Polar pattern:	Cardioid
Cartridge size:	Φ9.7*5.0mm
Sensitivity:	- 47dB
Frequency response:	40 to 18KHz
Output impedance:	≤680KΩ
Working voltage:	vDC 1V- 10V
S/N ratio:	≥60dB
Weight:	89g
Cable Length:	3m

Designed for (70mm-93mm) thickness acoustic guitar. High quality condenser microphone. Vibration protection, prevent the mechanical noise.







LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
500x440x380mm 19.7x17.3x15in	7 kg / 15.4 lb	50u

PRO 516V

COD. **5102380**

Element:	Condenser
Polar pattern:	Omnidirectional
Cartridge size:	Φ 6.0 * 2.7 mm
Sensitivity:	- 38 dB
Frequency response:	20 to 2KHz
Output impedance:	≤2.2KΩ
Working voltage:	DC 2V-10V
Signal-to-noise ratio:	more than 58dB
cable length:	1.5m

Specifications are subject to change without notice.


Hang on the violin string to pick up the sound. Soft plastic clip for vibration protection, prevent the mechanical noise.







INSTRUMENT MICROPHONES

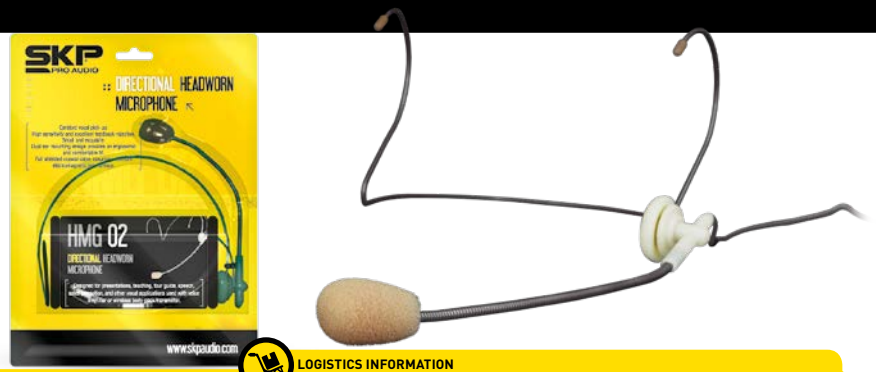

HMG 02

COD. 5102520

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
368 x 470 x 427 mm / 14,5 x 18,5 x 16,8 In	4,62 Kg / 10,2 Lb	40u

Element Condenser	Output impedance: 2.2KΩ a (1kHz)	
Polar pattern: Cardioid	Max. Operating voltage: 10V	
Frequency Response: 100Hz-12.5 KHz	Power requirement: 2.0V	
Sensitivity: -45dB (0dB=1V/Pa a 1kHz)		



1mm DIAMETER | **BAG** INCLUDED

HSP 2

COD. 5102702

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
550 x 410 x 180 mm / 21,7 x 16,1 x 7,1 In	9,5 Kg / 20,9 Lb	50u

Element: Condenser	Output impedance: 2KΩ±	Wight: 13g
Polar pattern: Omni-directional	SPL max: 140dB	Mic.Dimension: Φ3mm
Frequency Response: 20Hz-20KHz	Operating votage: 0.8-5V	Output connector: 3.5mm plug
Sensitivity: -35± 1V/Pa	Cable: Φ1.0mm*1.2m	Accessory: Windscreen



HSP 4

COD. 5102703

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
410 x 320 x 330 mm / 16,1 x 12,6 x 13 In	4,5 Kg / 9,9 Lb	20u

Element: Back electrets condenser	Output impedance: 2KΩ±	Mic.Dimension: Φ3.5mm
Polar pattern: Omni-directional	SPL max: 140dB	Output connector: 3.5 plug
Frequency Response: 20Hz~20KHz	Power Supply: 1.5-12V D.C.	Accessories: Windscreen
Sensitivity: -45± (1V/Pa at 1KHz)	Cable: Φ1.4mm*1.2m	



HMB 3

COD. 5102701

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
410 x 320 x 330 mm / 16,1 x 12,6 x 13 In	4,5 Kg / 9,9 Lb	20u

Element: Condenser	Output impedance: 650Ω	Wight: 42g
Polar pattern: Cardioid	SPL max: 120dB	Mic.Dimension: Φ15mm
Frequency Response: 50Hz~18KHz	Power Supply: 1.5-10V D.C.	Output connector: 3.5mm plug
Sensitivity: -47±	Cable: Φ2mm*1.2m	Accessory: Windscreen

Specifications are subject to change without notice.

HC1 SHU

COD. 1407313



HC2 SEN

COD. 1407314



HC3 AKG

COD. 1407315



STUDIO/ PODCASTING MICROPHONES





LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
278x482x395 mm 10.9 x 19 x 15,6 in	14.5 kg / 32 lb	30u

PODCAST 300 COD. 5102535

- Type Dynamic
- Polar Pattern Cardioid
- Frequency Response 50-15.000Hz
- Sensitivity -40dB
- S/n Ratio 68dB
- Equivalent Noise Level ≤22dB
- Max Spl 130dB
- Power Requirements USB Power (5V DC)
- Bit Depth 16 Bit
- Sample Rate 44.1 kHz/48 kHz
- Control On/Off Switch
- Output Connector USB-type A
- Accessories Included Table Stand - Mic

HOT FEATURES

- PLUG & PLAY
- USB CONNECTOR
- CARDIOID POLAR PATTERN

MOBILE RECORDING



HOT FEATURES

- MICROPHONE MOUNT AND TABLE STAND FOR CONVENIENT USE
- HIGH SENSITIVITY AND CLEAR SOUND QUALITY
- PLUG AND PLAY, NO NEED 48V PHANTOM POWER SUPPLY
- CARDIOID POLAR PATTERN

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
423x502x476 mm 16,7 x 19,8 x 18,7 in	17,6 kg / 38,8 lb	20u

PODCAST 200 COD. 5102528

AVAILABLE IN: PURPLE

- Transducer Principle: Condenser
- Polar Pattern: Cardioid
- Frequency Response: 80Hz-16KHz
- Sensitivity; -46dB (0dB=1V/Pa at 1KHz)
- Operating Voltage: MOC Socket intelligent power supply or 12-52V phantom power supply



HOT FEATURES

- MICROPHONE MOUNT AND TABLE STAND FOR CONVENIENT USE
- HIGH SENSITIVITY AND CLEAR SOUND QUALITY
- PLUG AND PLAY, NO NEED 48V PHANTOM POWER SUPPLY
- CARDIOID POLAR PATTERN

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
278x482x395 mm 10.9 x 19 x 15,6 in	14.5 kg / 32 lb	30u

PODCAST 100 COD. 5102527

- Transducer Principle: Condenser
- Polar Pattern: Cardioid
- Frequency Response: 80Hz-15KHz
- Sensitivity; -32dB (0dB=1V/Pa at 1KHz)
- Power Requirement: Intelligent power supply by MIC socket
- Dimension: 40x40x138mm (1.6x1.6x5.4")

DRUMSET MICROPHONES

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
310 x 590 x 410 mm 12,2 x 23,2 x 16,1 In	17,2 Kg / 37,9 Lb	5u

DMS 7II

COD. **5102519**

- The DMD-701 is especially for kick drums, bass amps and other low frequency instruments. Dynamic - Cardioid
- DMD-702 and DMD-703 are designed to respond in the best way for TOM-TOM and snares. Dynamic-Cardioid.
- The condensers microphones DMC-704 with flat response and extended in high frequencies is essential to give clarity and sizzle to cymbals and other instruments such as pianos and acoustic guitars.
- XLR connectors
- Anchors fixation with standard thread
- Wind Protector
- Carrying and protection case



DMS 7II INCLUDED

- DMS-701 x1 **KICK DRUMS**
- DMS-702 x3 **TOM**
- DMS-703 x1 **SNARE DRUM**
- DMS-704 x2 **CYMBALS**
- DMS-704 MIC CLIPS x2
- Windshield x2
- SDM-8 x4 **(INCLUDED)**

SDM -8




MICROPHONE CLAMP

DRUM RIM MICROPHONE CLAMP

This microphone clamp offers you the ability to perfectly position your microphones on your drums.

Unit is designed to work with 5/8"-27 standard thread mic clips.



LOGISTICS INFORMATION

COD. **3300203**

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
195 x 390 x 310 mm 7,7 x 15,4 x 12,2 In	4,1 Kg / 9 Lb	50u

VIDEO MICROPHONE

PRO-VC MIC / PROFESSIONAL CAMERA MICROPHONE

FEATURES

- Super Cardioid directivity characteristic can effectively reduce the ambient noise
- Windshield included
- Shock proof design can reduce the mechanical noise of cameras and other vibration noise
- Rugged aluminum mic housing features effective EMI and RF rejection.
- Powered by 1.5V AA alkaline battery (100hrs)
- Designed for ENG, film, broadcast and more.

SPECIFICATION

- Element: Condenser
- Polar Pattern: super cardioid
- Frequency Response: 50Hz-18KHz
- Sensitivity: -32dB(0dB=1V/Pa at 1KHz)
- Sensitivity boost: +10dB
- Bass Filter: 60Hz 10dB/octave
- Output Impedance: 2KΩ
- Power Requirement: 1.5V AA battery

HOT FEATURES

- SUPER CARDIOID POLAR PATTERN
- SWITCHABLE HIGH PASS FILTER
- OVER 100 HOURS USE
- CAMERA SHOE MOUNT

COD. 5102384

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
452 x 535 x 418 mm 17,8 x 21,1 x 16,5 In	19,5 Kg / 43 Lb	20u

SUPER **CARDIOID**

The PRO-VC MIC is a true shotgun microphone designed for use with camcorders, DSLR cameras and portable audio recorders as a source of primary and reference audio.
At the heart of the PRO-VC MIC is a high resolution condenser capsule that provides broadcast-quality audio via a 3.5mm connector (outputting the mono signal to both left and right channels).
A super-cardioid polar pattern ensures that surrounding audio is minimized, and your recording is focused on the subject in front of the camera.






SHOTGUN MICROPHONES

HOT FEATURES

- CARDIOID POLAR PATTERN
- HYPER CARDIOID POLAR PATTERN
- ON/OFF SWITCH
- 1 AA BATTERY



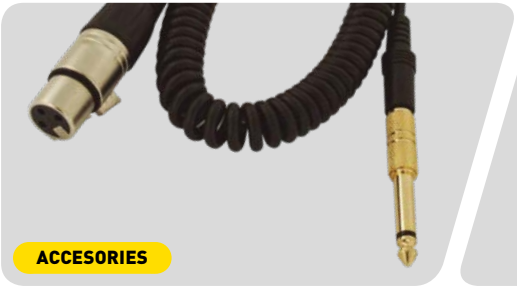



PRO SG2

COD. 5102532

Element: Condenser
Polar Pattern: Cardioid/Hyper-cardioid
Frequency Response: 50Hz-20KHz(C) / 80Hz-16KHz(H-C)
Sensitivity: -45dB C) / -30dB (H-C) (0dB=1V/Pa at 1kHz)
Output Impedance: 500Ω(C) / 1600Ω(H-C) (at 1kHz)
Load Impedance: ⩾1000Ω
Power Requirements: 1.5V AA battery
Body Dimensions: Ø22 x 278mm

Specifications are subject to change without notice.

COD. 5102384

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
452 x 535 x 418 mm 17,8 x 21,1 x 16,5 In	19,5 Kg / 43 Lb	20u

HYPER CARDIOID

- Optional cardioid or hyper-cardioid directivity
- Distinct and clear vocal pick up
- Powered by batteries
- High sensitivity, wide dynamic range and low distortion
- Built-in pre-amplifier
- Spring cable ensures flexible in-field performance

HOT FEATURES

- 1 AA BATTERY
- HYPER CARDIOID POLAR PATTERN
- ON/OFF SWITCH



COD. 5102384

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
452 x 535 x 418 mm 17,8 x 21,1 x 16,5 In	19,5 Kg / 43 Lb	20u

HYPER CARDIOID

- Hyper-cardioid directivity
- Distinct and clear vocal pick up
- Low inherent self-noise
- High sensitivity, wide dynamic range and low distortion
- Wide frequency response
- Spring cable ensures flexible in-field performance

PRO SG4

COD. 5102533

Element: Condenser
Polar Pattern: Hyper-cardioid
Frequency Response: 40Hz-22KHz
Sensitivity: -30dB (0dB=1V/Pa at 1kHz)
Output Impedance: 500Ω(C) / 1600Ω(H-C) (at 1kHz)
Load Impedance: ⩾1000Ω
Power Requirements: 1.5V AA battery
Body Dimensions: Ø22 x 278mm

Specifications are subject to change without notice.

A MUSIC STUDIO IN YOUR POCKET



SMART TRACK 2

COD. 5100022

MOBILE AUDIO INTERFACE


LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
525 x 270 x 440 mm 20,7 x 10,6 x 17,3 In	13,3 Kg / 29,3 Lb	20u

2XAA BATTERY

HOT FEATURES

- STUDIO RECORDING
- XLR MIC INPUT
- DYNAMIC & CONDENSER MIC
- PHANTOM POWER
- 1/8" PLUG IN/OUT
- INSTRUMENT INPUT

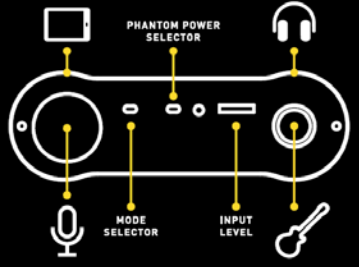

GOOSENECK MICROPHONES

- Style and proffesional performance for legislative chambers, houses of praise & worship and conference rom.



HOT FEATURES

- CARDIOID POLAR PATTERN
- DYNAMIC MICROPHONE

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
330 x 510 x 510 mm 13 x 20,1 x 20,1 In	17,2 Kg / 37,9 Lb	40u

CARDIOID

GM 9

COD. 5102518

Element	Dynamic
Polar Pattern	Cardioid
Frequency	60Hz - 15KHz
Sensitivity	-54dB (0dB=1V/Pa at 1KHz)
Output Impedance	500Ω
Output connector	XLR
Net weight	310g
Power	Not required
Total height	40CM/15.75"
Cable	Direct connection
Switch	ON/OFF



HOT FEATURES

- CARDIOID POLAR PATTERN
- ON/OFF SWITCH
- CONDENSER MICROPHONE
- LIGHT RING

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
330 x 510 x 510 mm 13 x 20,1 x 20,1 In	17,2 Kg / 37,9 Lb	40u

INCLUDED **XLR to TS**

SLENDER STYLING

PRO 6K PODIUM

COD. 5102351

Flexible stem and Light Ring

Type:	Condenser
Polar pattern:	Cardioid
Frequency Response:	60Hz-18KHz
Output Impedance:	680Ω
Sensitivity:	-46dB
Switch:	Push Control ON/OFF
Battery Power:	3V DC(AA1,5Vx2)
Cable:	5 m (16ft)
Output connector:	XLR



Light ring at goose neck top.

HOT FEATURES

- CARDIOID POLAR PATTERN
- ON/OFF SWITCH
- CONDENSER MICROPHONE
- LIGHT RING

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
480 x 300 x 430 mm 18,9 x 11,8 x 16,9 In	14,6 Kg / 32,2 Lb	10u

INCLUDED **XLR to TS**

TYPE CONDENSER

PRO 7K PARLIAMENT

COD. 5102345

Flexible stem and Light Ring

Type:	Condenser
Polar pattern:	Cardioid
Frequency Response:	60Hz-18KHz
Output Impedance:	680Ω
Sensitivity:	-46dB
Switch:	Push Control ON/OFF
Battery Power:	9V DC
Cable:	5 m (16ft)
Output connector:	XLR- Balanced

Specifications are subject to change without notice.



LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
330 x 510 x 510 mm 13 x 20,1 x 20,1 In	17,2 Kg / 37,9 Lb	40u

PRO 9K PARLIAMENT

COD. 5102384

HOT FEATURES

- HYPER CARDIOID POLAR PATTERN
- CONDENSER MICROPHONE
- LIGHT RING

- Polar Pattern: Hyper Cardioid
- Frequency Response: 40Hz-16KHz
- Output impedance: 200Ω
- Sensitivity: -38dB
- Power: 9-52 volts phantom power or 2 pieces 1,5V AAA batteries
- Cable: 5m (16ft), XRL male to XLR female
- Output: Balanced



LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
330 x 510 x 510 mm 13 x 20,1 x 20,1 In	17,2 Kg / 37,9 Lb	40u

PA 1M

COD. 5102384

HOT FEATURES

- CARDIOID POLAR PATTERN
- CONDENSER MICROPHONE
- ON/OFF SWITCH

- Push-to-talk switch
- 2 Bus connections for link/output
- 2P Dip swtich for priority/chime switch
- Master/Slave selection switch
- Element: Condenser
- Polar Pattern: Cardioid



LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
330 x 510 x 510 mm 13 x 20,1 x 20,1 In	17,2 Kg / 37,9 Lb	40u

PA 6M

COD. 5102384

HOT FEATURES

- CARDIOID POLAR PATTERN
- CHIMES AND MESSAGE BANK
- CONDENSER MICROPHONE
- 6 INDEPENDENT ZONES

- Push-to-talk switch
- Paging: 6 zone selectors
- 6 zone message buttons
- Mic sensitivity adjust
- RCA auxiliary input
- 2 bus connections
- 2P dip switch
- USB port for chime



PRO 8K

COD. 000211542

- Element: Condenser
- Polar Pattern: Hyper-cardioid
- Frequency Response: 60Hz-16KHz
- Sensitivity: -36dB
- Bass Filter: 12dB/octave at 100Hz
- Output Impedance: 200Ω
- Power Requirements: 9-52V Phantom Power

MINI XLR TO XLR CABLE
INCLUDED



MINI XLR PLUG





SHARE YOUR KNOWLEDGE

WIRELESS CONFERENCE MICROPHONE



HOT FEATURES

- UHF RADIO FREQUENCY
- CARDIOID POLAR PATTERN
- SET ON AND

PARLIAMENT 904U

- UHF 700-870 MHz
- Four channels
- 99 non-interfered channels
- Adjustable 560 free frequencies
- LCD display on receiver and transmitter
- Led light ring power indicator

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
330 x 510 x 510 mm 13 x 20,1 x 20,1 In	17,2 Kg / 37,9 Lb	40u

UHF 700-870 MHz



PARLIAMENT 904U

COD. 5102386

Power Supply:Transmitter:3V(2x1.5V AA Battery)
Receiver: DC 15-17V
Microphone Battery Consumption:85mA(3V)
Carrier Frequency: UHF700-870MHz
Frequency Stabilization:±0.002%
Signal/Noise Ratio: >98dB
Border Upon Channel Rejection:>80dB
Dynamic Range: >90dB
Total Harmonic Distortion: <0.8%
Type: Condenser
Polar Pattern: Cardioid
Frequency Response: 60Hz-16KHz
Microphone Sensibility: -47dB
Receiving Sensitivity: 10dBuV(Sinad>30dB)
Audio Output Level: Unbalanced:±400mV
Balanced:±300mV

Specifications are subject to change without notice.

VHF WIRELESS MICROPHONES

GO WIRELESS AND SOUND LIKE A PRO!

In a world of wireless experience each SKP wireless system is backed by the experience of engineers and professionals whose passion for sonic excellence is matched only by their commitment to ensure exceptionally long-range signal, reliability, interruption-free performance and freedom of movement

SKP wireless Systems are manufactured to the highest quality standards, and all the premium features and flexibility that you need to give you many years of trouble free use.

SHOW MUST GOES ON... FREE OF INTERRUPTION

- Sophisticated digital control electronics make this whole system work at its best in multiple situations and in the simplest manner.
- Auto-mute function automatically eliminates noise and feedback
- Lockout function to protect receiver settings against undesired changes.
- This wireless system provides access to a total of 100 different frequencies.
- You can run up to 24 units on stage without cross interference.
- Control menu navigable via back-illuminated LCD screen.



LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
380 x 325 x 520 mm 15 x 12,8 x 20,5 In	11 Kg / 24,3 Lb	10u

SINGLE CHANNEL

VHF 895

COD. **5102437**

RECEIVER	
Signal/Noise Ratio	More than 90dB
Image & Spurious Rejection	More than 80dB
Receiving Sensitivity	10dBuv (Sinad=30dB)
De-Emphasis	50us
HANDING MICROPHONE	
Transmitter Power	8.5mw
Modulation Type	FM, F3F
Max Deviation	±25Khz
Spurious Emission	More than 40dB (with carrier)
Continuous Using	6 Hours
COMPREHENSIVE PERFORMANCE	
Carrier Frequency	174-240MHz (Depends on the region)
Frequency Stabilization	Less Than ±30ppm



LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
380 x 325 x 520 mm 15 x 12,8 x 20,5 In	11 Kg / 24,3 Lb	10u

SINGLE CHANNEL

VHF 795

COD. **5102446**

RECEIVER	
Signal/Noise Ratio	More than 90dB
Image & Spurious Rejection	More than 80dB
Receiving Sensitivity	10dBuv (Sinad=30dB)
De-Emphasis	50us
HANDING MICROPHONE	
Transmitter Power	8.5mw
Modulation Type	FM, F3F
Max Deviation	±25Khz
Spurious Emission	More than 40dB (with carrier)
Continuous Using	6 Hours
COMPREHENSIVE PERFORMANCE	
Carrier Frequency	174-240MHz (Depends on the region)
Frequency Stabilization	Less Than ±30ppm

Specifications are subject to change without notice.



LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
380 x 325 x 520 mm 15 x 12,8 x 20,5 In	11 Kg / 24,3 Lb	10u

SINGLE CHANNEL

VHF 695

COD. **5102455**

RECEIVER	HANDING MICROPHONE
Signal/Noise Ratio More than 90dB	Transmitter Power 8.5mw
Image & Spurious Rejection More than 80dB	Modulation Type FM, F3F
Receiving Sensitivity 10dBuv (Sinad=30dB)	Max Deviation ±25Khz
De-Emphasis 50us	Spurious Emission More than 40dB (with carrier)
	Continuous Using 6 Hours



LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
358 x 365 x 625 mm 14,1 x 14,4 x 24,6 In	15 Kg / 33,1 Lb	8u

DUAL CHANNEL

VHF 2682

COD. **5102476**

RECEIVER

- Signal/Noise Ratio More than 90dB
- Image & Spurious Rejection More than 80dB
- Receiving Sensitivity 10dBuv (Sinad=30dB)
- De-Emphasis 50us

HANDING MICROPHONE

- Transmitter Power 8.5mw
- Modulation Type FM, F3F
- Max Deviation ±25Khz
- Spurious Emission More than 40dB (with carrier)
- Battery Voltage 1.5V X 2
- Continuous Using 6 Hours

COMPREHENSIVE PERFORMANCE

- Carrier Frequency 174-240MHz (Depends on the region)
- Frequency Stabilization Less Than ±30ppm
- Dynamic Range More Than 90dB
- Total Harmonic Distortion Less Than 0.5%
- Frequency Response 40Hz-15KHz±3dB
- Audio Output Level ±400mV (Mix ±200mV)

Specifications are subject to change without notice.

PORTABLE WIRELESS AMPLIFIER

GO WIRELESS AND SOUND LIKE A PRO!

HOT FEATURES

- BATTERY POWERED
- HIGH PERFORMANCE VHF SYSTEM
- HEADSET/ LAVALIER WIRELESS MICROPHONE







INCLUDED

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
410 x 395 x 655 mm 16,1 x 15,6 x 25,8 In	16 Kg / 35,3 Lb	4u

MAX POWER 140W

COD. **5102512**

TH 211 GLOBETROOTER

Portable Wireless Amplifier

- Lavalier - Headset Microphones
- Carrier Frequency: VHF 180-270MHz
- S/N Ratio: >100dB
- T.H.D.: < 0.5%
- Frequency Response: 100Hz-16KHz
- Transmitter Power: 13m
- Battery Voltage: 9V
- Rx. Power Supply: AC 220V / DC 12V
- Signal Input: wired MICx1 Unbalanced jack
- Output Line: 1 x 3,5mm Unbalanced phone jack
- Speaker: 4Ω 6 ½´
- Output RMS Power: 35W
- 1.2Ah Rechargeable battery
- Working Distance: 30m

Specifications are subject to change without notice.

UHF WIRELESS MICROPHONES

MINI I

COD. 5102521

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
380 x 325 x 520 mm 15 x 12,8 x 20,5 In	12 Kg / 26,5 Lb	10u



MINI III

COD. 5102522

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
380 x 325 x 520 mm 15 x 12,8 x 20,5 In	10 Kg / 22 Lb	10u



MINI V

COD. 5102523

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
380 x 325 x 520 mm 15 x 12,8 x 20,5 In	10 Kg / 22 Lb	10u



SPECIFICATIONS — MINI I - III - V

Carrier frequency	UHF 600-900MHz
Dynamic range:	> 90dB
Total harmonic distortion:	< 0.5%
Frequency response:	40Hz-15KHz
Audio output level:	±400mV
FIXED RECEIVER	
Power supply:	17V DC
Consume power:	4W
Signal/noise ratio:	> 90dB
Image & spurious rejection:	> 80dB
Border upon channel rejection:	> 80dB
Receiving sensitivity:	10dBuV(SINAD=30dB)
De-emphasis:	50uS
MAX Receiving distance:	50m

HANDING MICROPHONE	
Transmitter power:	30mW
Max deviation:	± 25KHz
Spurious emission:	> 40dB(WITH CARRIER)
Battery voltage:	1.5V AA Battery x 2
Continuous using:	4 hours
BODY-PACK	
Transmitter power:	30mW
Modulation type:	FM,F3F
Max deviation:	± 25KHz
Spurious emission:	> 40dB(WITH CARRIER)
Battery voltage:	1.5V AA Battery x 2
Continuous using:	4 hours
MAX Receiving distance:	50m



MINI SERIES

In the MINI line, SKP renews the UHF wireless systems series with SMT technologies doing a compact system with smaller receptors specially designed to be use and carried conveniently to any space and provide secure transmission off-interferences with use highest frequencies. Handheld, headset and lavalier systems.

Specifications are subject to change without notice.

UHF WIRELESS MICROPHONES



LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
358 x 365 x 625 mm 14,1 x 14,4 x 24,6 In	15 Kg / 33,1 Lb	8u

UHF 261

COD. **5102504**

Dual-Channel UHF Wireless	Transmitter Power: 8,5mW
Handheld Microphone System	Audio Output: ±400mV
Carrier Frequency: 480Mhz - 600MHz	Continuous Using: 6 Hours
Dynamic Range: >90dB	Receive Channel: 2 Channels
Total Harmonic Distortion: <0.5%	Receiver Power Supply: DC 17V
Frequency Response: 40Hz-15KHz	Battery Power: 3V DC(AA1,5Vx2)
S/N Ratio: >80dB	Range: 260ft. (80m) open field
Image Disturbing Rate: >80dB	



LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
358 x 365 x 625 mm 14,1 x 14,4 x 24,6 In	15 Kg / 33,1 Lb	8u

UHF 282

COD. **5102511**

RECEIVER	Max Deviation ±25Khz
Signal/Noise Ratio More than 80dB	Spurious Emission More than 40dB
Image & Spurious Rejection More than 80dB	(with carrier)
Receiving Sensitivity 10dBuv (Sinad=30dB)	Battery Voltage 1.5V X 2
De-Emphasis 50us	Continuous Using 8 Hours
HANDING MICROPHONE	**COMPREHENSIVE PERFORMANCE**
Transmitter Power 8.5mw	› Frequency Stabilization Less Than ±30ppm
Modulation Type FM, F3F	› Dynamic Range More Than 90dB

Specifications are subject to change without notice.



LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
370 x 416 x 570 mm 14,6 x 16,4 x 22,4 In	14 Kg / 30,9 Lb	5u

TRUE DIVERSITY SYSTEM

CASE INCLUDED

UHF 295

COD. **5102506**

Single-Channel UHF True Diversity Wireless	Battery status in RX
Hand-Held Microphone System	Digital volume control system
Carrier Frequency: UHF 800MHz	Audio Output: ±400mV
99 UHF channels selectable	Continuous Using: 10 Hours
Dynamic Range: >90dB	Receiver Power Supply: DC 17V 300mA
Total Harmonic Distortion: <0.5%	Battery Power: 3V DC(AA1,5Vx2)
Frequency Response: 35Hz-16KHz	Range: 330ft. (100m) open field
S/N Ratio: >90dB	Anti-Jamming with the UHF band
Image Disturbing Rate: >90dB	Receaving frequencies tunable
LCD Display with Backlight	Menu assistes operation and flexibility
Balanced XLR connecter and no-balanced ¼" audio output	Professional LCD Display for frequency, RF and AF level
Auto scan for channels (ASC)	



LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
520 x 305 x 675 mm 20,5 x 12 x 26,6 In	21 Kg / 46,3 Lb	5u

UHF 471

COD. **5102513**

Dual-Channel UHF Wireless	Receiver Power Supply: DC 17V 300mA
HandHeld Microphones System	Battery Power: 3V DC(AA1,5Vx2)
Carrier Frequency: UHF 800MHz	Range: 330ft. (100m) open field
Dynamic Range: >90dB	
Total Harmonic Distortion: <0.5%	
Frequency Response: 40Hz-15KHz±3dB	
S/N Ratio: >90dB	
Image Disturbing Rate: >80dB	
Transmitter Power: 10mW	
Audio Output: 0dBu	
Continuous Using: 8 Hours	
Receive Channel: 2 Channels	

Specifications are subject to change without notice.

UHF WIRELESS SYSTEM

WIRELESS UHF TRUE DIVERSITY SYSTEM

45° PLUG. SMALL SIZE, SINGLE CHIP CIRCUITS AND SMT TECHNOLOGY.

The UHF wireless transmitters and receiver system designed for the most demanding musicians and sound engineers. The receiving base has true diversity system that ensures exceptional stability of the transmitted signal, achieving a maximum range of 70m (229.66 ft). It adopts single chip circuits and SMT technology.
With designed language compressed circuit which greatly improves signal-to-noise ratio.
Efficient (lithium) battery energy consumption design, transmitter can work for 8 hours.
Latest high frequency dielectric filters which can filter Out-of-band interference signal farthest.
Powered by DC or (AA) batteries.



BOX INCLUDED

IT'S A MULTISET SERIES TRANSMITTER WITH 45º PLUG FOR ENSURE THE PERFECT CONNECTION IN MANY TIPS OF GUITARS AND BASS GUITARS, PROVIDING FREE-WIRE TRANSMISSION WITH WIDE COVERAGE RADIUS.

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
490 x 305 x 552 mm 19,3 x 12 x 21,7 In	12 Kg / 26,5 Lb	10u

HOT FEATURES

- TRUE DIVERSITY SYSTEM
- UHF RADIO FREQUENCY
- BATTERY POWERED RECEIVER

PRECISION GUITAR PREAMP, ENSURES THAT ANY GUITARIST'S TONE STAYS "PURE AS THE WIRE" WITH NO UNWANTED COLOR OR DISTORTION.

INCLUDES TWO TRANSMITTERS, HANDHELD AND

GUITAR (NO SIMULTANEOUS USE)



- Manual ACT IR frequency pairing
- SMT technology, more reliable performance
- Using UHF 600-999 MHz brand which can avoid interference frequencies
- With PLL frequency stabilizing system, multiple well-selected channels
- Maximum operating distance 70m /229,66 ft
- Efficient (lithium) battery energy consumption design, transmitter can work for 8 Hours
- Latest high frequency dielectric filters which can filter Out-of-band interference signal farthest



LOGISTICS INFORMATION

MASTER DIMENSIONS
395 x 285 x 450 mm
15,6 x 11,2 x 17,7 In

GROSS WEIGHT
0,2 Kg / 0.4 Lb

MASTER PIECES
50u

MSIII-45

COD. 5102529

TRANSMITTER POWER:	10mW(Max)
MODULATION TYPE:	FM
MAX DEVIATION:	±40KHz
SPURIOUS EMISSIONS	>40dB
BATTERY VOLTAGE:	Lithium Battery
CONTINUOUS USE:	8 Hours

MULTISET III

COD. 5102526

TECHNICAL SPECIFICATIONS

Carrier frequency:	UHF 600-999MHz
Modulation type :	FM
Frequency stabilization:	< ±30ppm
Dynamic range:	> 90dB
Total harmonic distortion:	<0.5%
Frequency response:	40Hz-15KHz
Audio output level:	0--±400mV

FIXED RECEIVER

Power supply:	DC 10V /4 X 1.5VAA Battery
Consume power:	4W
Signal/noise ratio:	>90dB
Image & spurious rejection:	>80dB
Border upon channel rejection:	>80dB
Receiving sensitivity:	<10dBuV(SINAD=30dB)
De-emphasis:	50us

HANDHELD MICROPHONE

Transmitter power:	30mW
Modulation type :	FM
Max deviation:	±40KHz
Spurious emission:	>40dB
Battery voltage:	1.5VAA X2
Continuous using:	6 HOURS

GUITAR TRANSMITTER

Transmitter power:	10mW
Modulation type:	FM
Max deviation:	±40KHz
Spurious emissions	>40dB
Battery voltage:	Lithium Battery
Continuous use:	8 HOURS

Specifications are subject to change without notice.

DIGITAL WIRELESS MICROPHONES

DIGIMOD I



LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
358 x 365 x 625 mm 14,1 x 14,4 x 24,6 In	14 Kg / 30,9 Lb	10u

HOT FEATURES

- CARDIOID POLAR PATTERN
- AUTOMATICALLY FILTERS OUT RADIO INTERFERENCE
- 2.4GHZ DIGITAL WIRELESS SYSTEM
- NOISE FREE TRANSMISSION

In the wireless transmission SKP offers professional solutions with advanced technologies that ensures excellent reception loss absent, multiple channels, reliability in freedom to move.

DIGIMOD I

COD. **5102524**

TECHNICAL SPECIFICATIONS

Carrier Frequency	2.404-2.474GHz
Available CH	16 CHANNELS
Brand Range	2MHz
Dynamic Range	85dB
Total Harmonic Distortion	<0.1%
Max Receiving Distance	80m Receiver
Power Supply	DC17V
Consumption Power	2W
Signal to Noise Ratio	>95dB
Receiving Sensitivity	-80dBm
Hand Mic Transmitter Power	MAX 30mW
Modulation Type	GFSK
Ultraharmonics	-20dBm
Battery Voltage	2* 1.5V AA BATTERY
Continuous Using	>5 HOURS



Specifications are subject to change without notice.

DIGIMOD II

HOT FEATURES

- CARDIOID POLAR PATTERN
- AUTOMATICALLY FILTERS OUT RADIO INTERFERENCE
- 2.4GHZ DIGITAL WIRELESS SYSTEM
- NOISE FREE TRANSMISSION

The DIGIMOD line is the most recommended option to ensure the best quality transmission with a wireless digital system with GSFK modulation using ISM 2.4 GHz band reducing the possibility of interference, and 16 selectable channels.

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
540 x 270 x 640 mm 21,3 x 10,6 x 25,2 In	15 Kg / 33,1 Lb	5u

REAR PANEL



DIGIMOD II

COD. **5102525**

TECHNICAL SPECIFICATIONS

Carrier Frequency	2.404-2.474GHz
Available CH	16 CHANNELS
Brand Range	2MHz
Dynamic Range	85dB
Total Harmonic Distortion	<0.1%
Max Receiving Distance	80m Receiver
Power Supply	DC17V
Consumption Power	2W
Signal to Noise Ratio	>95dB
Receiving Sensitivity	-80dBm
Hand Mic Transmitter Power	MAX 30mW
Modulation Type	GFSK
Ultraharmonics	-20dBm
Battery Voltage	2* 1.5V AA BATTERY
Continuous Using	>5 HOURS

Specifications are subject to change without notice.


LISTEN
FROM ANOTHER
ANGLE

WIRELESS MONITORING SYSTEM



HOT FEATURES

- TRUE DIVERSITY SYSTEM
- WORKING TIME 10HS
- UHF RADIO FREQUENCY
- IN EAR HEADPHONES INCLUDED



LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
575x520x265mm 22.6x22.5x10.4in	19kg/41lb	10u

MAX POWER **100mW**

- UHF 600-928MHz frequency range
- Four levels RF output selectable
- True Diversity receiver for maximum range and dropout protection
- Illuminated graphic display
- PLL Synthesized circuit
- 100 pre-set selectable channels
- Wireless synchronization of receiver parameter from transmitter
- Increased range for audio sensitivity
- LCD display shows the RF level, AF level, channel and frequency.
- EIA standard 1/2U rack-mountable metal chassis
- Up to 80m line-of-sight operating range (without electromagnetic interference)
- Designed for professional stage performance applications

STAGE IN EAR

COD. **5102530**

TRANSMITTER (MAIN UNIT)	RECEIVER (BELT-PACK)
Frequency Range: 600-952MHz (Region dependent)	Frequency Preparation: PLL Synthesized Control
Frequency Type: F3E	Type of reception: True Diversity
Channels: 100	Receive Sensitivity: -11dBm (sinad≥30dB)
RF Output Power: 10mW/ 20mW/ 50mW/ 100mW	Earphone output: 3.5mmφ/ 16ohms 105mW
Frequency Response 30Hz-18KHz	Synchronization: Infrared
S/N Ratio: ≥105dB	Antenna: 1/4 wave Length Wire Type
T.H.D: <0.5% at 1KHz	Power Supply: 2*AA battery
Dynamic Range: >100dB	Operating time: 10h (depending on batteries)
Audio Input: 2x XLR/6.35mm Jack	Dimensions(L*W*H): 110*63*21mm
Antenna: TNC	
Power Supply: DC12V/600mA	
Dimensions(L*W*H): 210*170*44mm	

Specifications are subject to change without notice.

UHF WIRELESS MICROPHONES



GUITAR WIRELESS SYSTEM

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
395 x 285 x 450 mm 15,6 x 11,2 x 17,7 In	11 Kg / 24,3 Lb	10u

UHF 2000G

COD. 5102508

Guitar Wireless System	Transmitter Power: 5mW
PLL Synthesized Control-Channel UHF	Type of Reception: Single Super heterodyne
Carrier Frequency: UHF600-870MHz	16 Switchable Channels
Maximum Input Level: +2dBV	Modulation Type: Variable Reactance Modulation
Input Impedance: 2KΩ	Continuous Using: 8 Hours
T.H.D.: <0.8% (1KHz 100mV)	Tx. Consumption Power: 1,5V 60mA (1AAA Battery)
Frequency Response: 50Hz – 15 KHz	Rx. Consumption Power: 3V (2AA Batteries) or 60mA 9V DC
Output: 6.3mm / ¼ in, Mono Jack	Range: 330ft.(100m) open field



SAXOPHONE WIRELESS SYSTEM

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
395 x 285 x 450 mm 15,6 x 11,2 x 17,7 In	11 Kg / 24,3 Lb	10u

UHF 4000S

COD. 5102510

Saxophone Wireless System	Transmitter Power: 5mW
PLL Synthesized Control-Channel UHF	Type of Reception: Single Super heterodyne
Carrier Frequency: UHF600-870MHz	16 Switchable Channels
Maximum Input Level: +2 dBV	Modulation Type: Variable Reactance Modulation
Input Impedance: 2KΩ	Continuous Using: 8 Hours
T.H.D.: <0.8% (1KHz 100mV)	Tx. Consumption Power: 1,5V 60mA (1AAA Battery)
Frequency Response: 50Hz – 15 KHz	Rx. Consumption Power: 3V (2AA Batteries) or 60mA 9VDC
Output: 6.3mm / ¼ in, Mono Jack	Range: 330ft.(100m) open field

Specifications are subject to change without notice.

DIGITAL WIRELESS AUDIO NETWORK

GO WIRELESS
AND SOUND LIKE A PRO!

HOT FEATURES

- 2.4GHZ DIGITAL WIRELESS SYSTEM
- INTELLIGENT FREQUENCY HOPPING
- MULTI-RECEIVER

- Operating Band: ISM 2.4GHz free band
- One transmitter with one receiver or multi-receiver
- GFSK digital modulation / demodulation
- External antenna can help to increase the transmit distance
- Intelligent Frequency Hopping can help to avoid interference effectively and ensure the channel quality.
- Automatic mute in bad channel quality or high error code rate
- More than 30 meters transmit distance in open place.



SPECIFICATIONS	RADIUM RX88 COD. 5102388	RADIUM TX88 COD. 5102387
Power Supply	AC 9V	AC 9V
Consumption Current	200mA	200mA
Operating Temperature	0~55°C	0~55°C
Storage Temperature	-20~80°C	-20~55°C
Frequency	2404~2476MHz	2404~2476MHz
Channel	25	25
Modulation	GFSK	GFSK
Receive Sensitivity	-84dBm (Min) /Transmit Power	6dBm
Output/Input Level	+8dBu	+3dBu(Mix)
Bandwidth	>= 1.8MHz	>= 1.8MHz
Frequency Response	20~20KHz,±3dB	20~20KHz,±3dB
S/N	>95dB	>95dB
Dynamic Range@1KHz	>90dB	>90dB
Crosstalk@1KHz	>90dB	>90dB
Distortion THD	<0.3%	<0.1%
Latency	20ms	20ms

RADIUM RX88

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
530 x 360 x 170 mm 20,9 x 14,2 x 6,7 In	6,25 Kg / 13,8 Lb	1u

MULTI RECEIVER

RADIUM TX88

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
530 x 360 x 170 mm 20,9 x 14,2 x 6,7 In	6,25 Kg / 13,8 Lb	1u

MULTI RECEIVER

Specifications are subject to change without notice.


ENJOY
THE SILENCE

WIRELESS TOUR GUIDE SYSTEM

Digital GFSK modulation; 16-bit / 8KHz sampling rate UHF 600-900MHz, Pre-set 1000 groups ID codes; support tour-guide and intercom function. OLED display shows the channel, frequency and battery life.
Unilateral ear hanging type headset with microphone function.
Powered by high capacity lithium-ion battery, playtime is more than 20hs.
Designed for tourist, hotel, training, simultaneous interpretation applications.

TRAVELER SYSTEM

TRAVELER **RX**	TRAVELER **TX**
Receiver sensitivity: -110dBm	Audio input: 3.5mm Mic / Line
Audio output: 3.5mm Earphone output	Max. input level : Mic: -30dBV / Line:0dBV
Battery: Li-Polymer(3.7V / 600mAH)	Battery: Li-Polymer(3.7V / 600mAH)
Battery life : > 20Hs	Battery life : > 15Hs

Specifications are subject to change without notice.



HOT FEATURES

- DIGITAL UHF RADIO FREQUENCY
- WORKING TIME 15HS
- 96 CHANNELS
- ULTRA LIGHTWEIGHT AND PORTABLE

TRAVELER TX — COD. 5102392

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
358 x 365 x 625 mm 14,1 x 14,4 x 24,6 In	14 Kg / 30,9 Lb	50u

TRAVELER RX — COD. 5102393

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
358 x 365 x 625 mm 14,1 x 14,4 x 24,6 In	14 Kg / 30,9 Lb	50u

TRAVELER CH — COD. 5102394

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
682x475x355 mm 24.4 x 47.5 x 14 inch	30.5 kg / 67.24 lb	4u

PROFESSIONAL HEADPHONES

WE MAKE HEADPHONES WITH SUPERIOR SOUND, CLARITY, CONFORT AND RUGGED DESIGN THAT THE MODERN DJ NEEDS.

Crafted from premium components, each SKP headphone, is designed to capture and control the detailed sonic to meet any professional audio need.

BECAUSE HOW YOU HEAR THE MIX
IS WHAT MATTERS THE MOST...

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
558 x 480 x 458 mm 22 x 18,9 x 18 In	15,34 Kg / 33,8 Lb	20u

MAX POWER 2000W



HOT FEATURES

- 2000 mW MAX. INPUT POWER
- 50MM DRIVER DIAMETER
- FREQUENCY RESPONSE 10 HZ - 20 KHZ

PH 550

COD. 5102606

Transducer principle: Dynamic	Power Capacity: 1000mW
Driver Diameter: Ø50mm	Cable: Ø4mm x 2.2m
Impedance: 42Ω	Adapter plug: Stereo Ø3.5mm +
Frequency Response: 10Hz-20KHz	Ø6.3mm, gold plated
Sensitivity: 100dB	Net Weight: 310g
Max. Input Power: 2000mW	

Specifications are subject to change without notice.





LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
400 x 510 x 380 mm 15,7 x 20,1 x 15 In	**8,14 Kg / 17,9 Lb** 8,05 Kg / 17,7 Lb	20u

MAX POWER 100/120mW

PH 350 / 450

COD. **5102604**
COD. **5102605**

Professional Headphone

- Extra lightweight and comfort for long time wearing
- Self-adjustable headband for easy comfortable fit
- Closed-type earcups design provide sound isolation
- Driver Unit: 2 x 40mm
- Frequency Response: 20-20KHz
- Impedance: 32Ω
- Sensitivity (at 1 KHz): 102dB / **107dB**
- Maximum Input Power: 100mW / **120mW**
- Plug: 3.5mm with 6.3mm Adapter
- Cord Length: 2,7m

40MM DRIVER DIAMETER

FREQUENCY RESPONSE 20 HZ - 20 KHZ

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
558 x 480 x 458 mm 22 x 18,9 x 18 In	15,34 Kg / 33,8 Lb	20u

MAX POWER 1500mW

HOT FEATURES

50MM DRIVER DIAMETER

FREQUENCY RESPONSE 10 HZ - 20 KHZ

DETACHABLE

PH 500

COD. **5102607**

Professional Headphone

- Extra lightweight and comfort for long time wearing
- Self-adjustable headband for easy comfortable fit
- Transducer
- Principle: Dynamic
- Driver Diameter: Ø50mm
- Impedance: 60Ω
- Sensitivity: 102dB
- Frequency Response: 10Hz-20KHz
- Power Handling Capability: 1500mW
- Cable: Ø4mm x 1.2m Spring Cable (full stretch length approx. 4m)
- Adaptor Plug: Stereo Ø3.5mm + Ø6.3mm

Specifications are subject to change without notice.

4 CHANNEL STEREO HEADPHONES AMPLIFIER

HOT FEATURES

WIDE FREQUENCY RESPONSE

STUDIO GRADE AMPLIFIER



- **4 INDEPENDENT SECTIONS**
- **1/4" STEREO INPUT**
- **FOUR 1/4" STEREO OUTPUTS**
- **GAIN CONTROLS PER CHANNEL**

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
558 x 480 x 458 mm 22 x 18,9 x 18 In	15,34 Kg / 33,8 Lb	20u

98dB S/N RATIO

CEILING SPEAKERS



LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
280 x 275 x 538 mm 11 x 10,8 x 21,2 In	5 Kg / 11 Lb	4u

MAX POWER 60W

SK TRC5

COD. 5110100

Full Range, Two-way, Dual-Cone.	Sensibility: 87dB
LF Section: 5 1/4" Woofer	Mounting Dimensions:
Magnet: 10 Oz	203mm (79/10")
Voice Coil 25mm / Hi-Temperature	Frame & Metal Grille: ABS
ASV coil	Paintable
Power Handling:	Coverage: N145° Conical
60W Peak / 30W Program / 15W RMS	
Frequency Response: 68hz - 18KHz	
Includes the T6 multitap transformer for 70V or 100V systems	
Taps available: 20W, 15W, 10W, 5W.	



LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
302 x 300 x 558 mm 11,9 x 11,8 x 22 In	6,2 Kg / 13,7 Lb	4u

MAX POWER 80W

SK TRC6

COD. 5110101

Full Range, Two-way, Dual-Cone.	Sensibility: 88dB
LF Section: 6 1/2" Woofer	Mounting Dimensions:
Magnet: 15 Oz	230mm (9")
Voice Coil 25mm / Hi-Temperature	Frame & Metal Grille: Frame
ASV coil	& Metal Grille
Power Handling:	Coverage: N135° Conical
80W Peak / 40W Program / 20W RMS	
Frequency Response: 60hz-19KHz	
Includes the T6 multitap transformer for 70V or 100V systems	
Taps available: 20W, 15W, 10W, 5W.	



LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
620x315x445 mm 24.4x12.4x17.5 in	9 kg / 19 lb	4u

MAX POWER 100W

SK TRC8

COD. 5110102

Full Range, Two-way, Dual-Cone.	Sensibility: 88dB
LF Section: 8" Woofer	Mounting Dimensions:
Magnet: 20 Oz	280mm (11")
Voice Coil 25mm / Hi-Temperature	Frame & Metal Grille: Frame
ASV coil	& Metal Grille
Power Handling:	Coverage: N130° Conical
120W / 60W / 30W RMS	
Frequency Response: 50hz-19kHz	
Includes the T6 multitap transformer for 70V or 100V systems	
Taps available: 20W, 15W, 10W, 5W.	

SK-CST6 / LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
420x410x410 mm 16,54x16,14x16,14 in	14.5 kg / 30 lb	20u

CS-65 / LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
475x375x200 mm 18.7x14.76x7.87 in	15 kg / 33 lb	20u

CS-50 / LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
420x410x410 mm 16,54x16,14x16,14 in	14.5 kg / 30 lb	20u



MAX POWER 40W

SK CST6

COD. 5110128

Full Range, Two-way, 120° Conical Coverage

LF Section: 6" Woofer / Magnet: 10 Oz

Voice Coil: 25mm / Hi-Temperature ASV coil

Power: 10W RMS / 20W Prg / 40W Peak

Frequency Response: 70Hz-18KHz

Includes transformer for 70V or 100V systems

Sensibility: 87dB

Mounting Dimensions: 190mm 7.5")

Frame & Metal Grille: ABS Paintable



CS 65

COD. 5110003

Power: 65W

Adjusting: Transformer

CS 65

COD. 5110001

Power: 5W

Adjusting: Potentiometer



Specifications are subject to change without notice.

CEILING SPEAKERS



SK W5

MAX POWER 60W

COD. 5110070

FULL RANGE, **TWO-WAY SYSTEM**

LF Section:	5 1/4" Woofer
Magnet:	8 Oz
Voice Coil:	25mm / Hi-Temperature ASV coil
HF Section:	33mm Mylard Tweeter
Power Handling:	60W Peak / 30W Program / 15W RMS
Frequency Response:	68hz - 20KHz
Sensibility:	87dB
Max Dimensions:	295mm(H) x 197mm(W) / (111/2"x 77/10")
Mounting Dimensions:	275mm(H) x 177mm(W)
Frame & Metal Grille:	ABS Paintable
Bracket:	Mounting Bracket Included



SK W6

MAX POWER 80W

COD. 5110071

FULL RANGE, **TWO-WAY SYSTEM**

LF Section:	6 1/2" Woofer
Magnet:	10 Oz
Voice Coil:	25mm / Hi-Temperature ASV coil
HF Section:	33mm Mylard Tweeter
Power Handling:	80W Peak / 40W Program / 20W RMS
Frequency Response:	60hz-20KHz
Sensibility:	88dB
Max Dimensions:	319mm(H) x 213mm(W) / (122/5"x 83/10")
Mounting Dimensions:	299mm(H) x 193mm(W)
Frame & Metal Grille:	ABS Paintable
Bracket:	Mounting Bracket Included



SK W8

MAX POWER 100W

COD. 5110072

FULL RANGE, **TWO-WAY SYSTEM**

LF Section:	8" Woofer
Magnet:	15 Oz
Voice Coil:	25mm / Hi-Temperature ASV coil
HF Section:	33mm Mylard Tweeter
Power Handling:	100W Peak / 50W Program / 25W RMS
Frequency Response:	58hz - 20KHz
Sensibility:	89dB
Max Dimensions:	379mm(H) x 276mm(W) / (144/5"x 104/5")
Mounting Dimensions:	359mm(H) x 256mm(W)
Frame & Metal Grille:	ABS Paintable
Bracket:	Mounting Bracket Included

Specifications are subject to change without notice.

PA SPEAKERS



LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
302 x 300 x 558 mm 11,9 x 11,8 x 22 In	6,2 Kg / 13,7 Lb	4u

SK C6FRT(EN54-24) COD. 95110165

Built-in speaker: 6.5" full range paper speaker
Rated Noise Power: 20W (70V/100V Line)
Rated 70 V line:1000? (5W) / 500Ω (10W) / 245Ω (20W)
Impedance: 100 V line:2000Ω (5W) / 1000Ω(10W) / 500Ω (20W)
Sensitivity: 92dB



LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
302 x 300 x 558 mm 11,9 x 11,8 x 22 In	6,2 Kg / 13,7 Lb	4u

SK C6FRT COD. 95110265

Speaker: 6.5"-4Ωpaper cone speaker
Input power: RMS 20W
Output power: 5, 10, 20W
Input voltage: 100V
Impedance: 2KΩ / 1KΩ / 500Ω
Frequency response: 100~20KHz
S.P.L: 90dB (1M/ W)



LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
302 x 300 x 558 mm 11,9 x 11,8 x 22 In	6,2 Kg / 13,7 Lb	4u

SK C6SLT COD. 95110365

Speaker: 6.5"-16Ω polypropylene woofer
Output power: 70V-7.5, 15, 30, 60W 100V-15, 30, 60W, COM
Input voltage: 70V/100V
Impedance: 656Ω/ 328Ω / 164Ω /80Ω
Frequency response: 10~20KHz
S.P.L: 92dB (1M/W)



LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
302 x 300 x 558 mm 11,9 x 11,8 x 22 In	6,2 Kg / 13,7 Lb	4u

SK H15 COD. 95110015

Input power (RMS): 15W (100V line)
Input impedance: 670Ω, 1KΩ, 2K?,3.3KΩ, 10KΩ,
Preset impedance: 670Ω
Frequency response: 450HZ~5KHz
Output power: 1, 3, 5, 10, 15W
S.P.L: 105dB (1W/ M)



LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
302 x 300 x 558 mm 11,9 x 11,8 x 22 In	6,2 Kg / 13,7 Lb	4u

SK H30 COD. 95110030

Input power (RMS): 30W (100V line)
Input impedance: 330Ω, 670Ω, 1KΩ, 2KΩ, 3.3KΩ, 10KΩ
Preset impedance: 330Ω
Frequency response: 350HZ~5KHz
Output power: 1, 3, 5, 10, 15, 30W
S.P.L: 107dB (1W/ M)



LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
302 x 300 x 558 mm 11,9 x 11,8 x 22 In	6,2 Kg / 13,7 Lb	4u

SK H35SQ COD. 95110135

Type: Square
Input power (RMS): 35W
Impedance: 8Ω
Frequency response: 300~10KHz
S.P.L: 107dB
Material: Aluminum
Weight (Approx.): 1.05kg (2.31 lb)

Specifications are subject to change without notice.



LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
302 x 300 x 558 mm 11,9 x 11,8 x 22 In	6,2 Kg / 13,7 Lb	4u

SK H44A

COD. 95110044

Type: Round
Material: Aluminum
Weight (Approx.): 3.2kg (7.05 lb)



LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
302 x 300 x 558 mm 11,9 x 11,8 x 22 In	6,2 Kg / 13,7 Lb	4u

SK HD35T

COD. 95110235

Input power (RMS): 35W (with transformer)
Input voltage: 100V
Impedance: (±20%): 290Ω (35W)/ 500Ω (20W)/ 1KΩ (10W)
Frequency response: 150Hz~6KHz
S.P.L: (±3dB): 114dB (1W/M) with TH-20
Material: Aluminum cover / Plastics base
Dimension: Ω130×137.5mm
Weight (Approx.): 1.9kg (4.19 lb)



LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
302 x 300 x 558 mm 11,9 x 11,8 x 22 In	6,2 Kg / 13,7 Lb	4u

SK HD60T

COD. 95110160

Input power (RMS): 60W (with transformer)
Input voltage: 100V
Impedance: (±20%) 170Ω (60W)/ 250Ω (40W)/ 500Ω (20W)
Frequency response: 150Hz~6kHz
S.P.L: (±3dB) 114dB (1W/M) with TH-20
Material: Aluminum cover / Plastics base
Dimension: ?130×137.5mm
Weight (Approx.): 2.50kg (6 lb)



LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
302 x 300 x 558 mm 11,9 x 11,8 x 22 In	6,2 Kg / 13,7 Lb	4u

SK MA43WP

COD. 95110043

Type: Round
Material: Aluminum
Weight (Approx.): 3.2kg (7.05 lb)




LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
302 x 300 x 558 mm 11,9 x 11,8 x 22 In	6,2 Kg / 13,7 Lb	4u

SK MA73WP

COD. 95110073

Input power: RMS 20W/MAX 40W
Output power: 2.5, 5, 10, 20W
Speaker: 7 wide band speakers of 70mm diameter (2.5" plastic cone speaker)

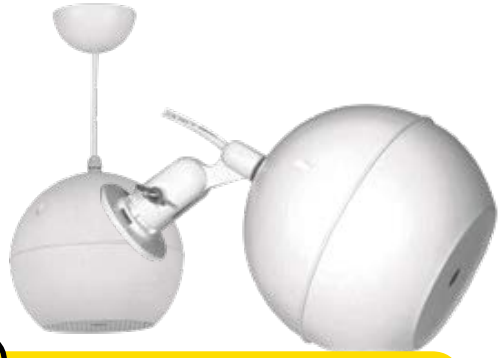

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
302 x 300 x 558 mm 11,9 x 11,8 x 22 In	6,2 Kg / 13,7 Lb	4u

SK SP6Y

COD. 95110260

Input power: RMS 30W / MAX 60W
Output power: 7.5, 15, 30W / 8Ω
Speaker: 6.5" wide band speaker
Input voltage: 70V,100V

Specifications are subject to change without notice.

COMPACT LOUDSPEAKERS







HOT FEATURES WATER PROOF OUT DOORS USE

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
380 x 422 x 508 mm 15 x 16,6 x 20 In	13,7 Kg / 30,2 Lb	4u

MAX POWER **100W**

SK 40

COD. 5110157

2 Way Fullrange System

Bass Speaker Unit	4"
Frequency Response	50Hz-20KHz
Sensivity	84dB (SPL 1w/1m)
RMS Power	25W
Program Power	50W
Peak Power Handling	100W
Coverage	100°H/80°V
Impedance	8Ω
Dimensions (HxWxD)	8.34" x 5.7" x 6.8" 212.3 x 144.6 x 172 mm
Weight	5.73lb. (2.6 kg)

HOT FEATURES WATER PROOF OUT DOORS USE COD. 5110056 WHITE

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
402 x 366 x 562 mm 15,8 x 14,4 x 22,1 In	16,6 Kg / 36,6 Lb	4u

MAX POWER **200W**

SK 50

COD. 5110057

2 Way Fullrange System

Bass Speaker Unit	2 x 4"
Frequency Response	65Hz-20KHz
Sensivity	88dB (SPL 1w/1m)
RMS Power	50W
Program Power	100W
Peak Power Handling	200W
Coverage	100°H/80°V
Impedance	8Ω
Dimensions (HxWxD)	12" x 5 7/8" x 7 " (305 x 150 x 185mm)
Weight	7.93lb. (3.6Kg)

HOT FEATURES WATER PROOF OUT DOORS USE COD. 5110058 WHITE

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
482 x 328 x 483 mm 19 x 12,9 x 19 In	11,8 Kg / 26 Lb	2u

MAX POWER **300W**

SK 60

COD. 5110059

2 Way Fullrange System

Bass Speaker Unit	5.25 "
Frequency Response	50Hz-20KHz
Sensivity	89dB (SPL 1w/1m)
RMS Power	75W
Program Power	150W
Peak Power Handling	300W
Coverage	100°H/80°V
Impedance	8Ω
Dimensions (HxWxD)	16.25" x 7.5" x 10.25" (412 x 189 x 260mm)
Weight	10.14 lb. (4.6Kg)

Specifications are subject to change without notice.


LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
328 x 396 x 440 mm 12,9 x 15,6 x 17,3 In	10,9 Kg / 24 Lb	2u

MAX POWER 300W



COD. 5110074
WHITE



SK 105

COD. 5110062

2 Way Fullrange

- Bass speaker unit: 5.25"
- Frequency Response: 65Hz-20KHz
- Sensitivity: 89dB (SPL 1w/1m)
- RMS Power:75W
- Program Power: 150W
- Peak Power Handling: 300W
- Impedance: 8Ω
- Woofer Cone Material: Mica
- Woofer Magnet Diameter: 80 x 40 x 15 mm
- Woofer Magnet Weight:12oz
- Woofer Voice Coil: 25 mm (1")
- Tweeter Size: 13 mm (1/2")
- Tweeter Cone Material: Mylar Dome
- Tweeter Magnet Diameter: 45 x 22 x 7 mm
- Tweeter Magnet Weight: 2oz
- Box Material: ABS (plastic)
- Mounting Bracket: Included
- Screw: Included


LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
378 x 450 x 546 mm 14,9 x 17,7 x 21,5 In	16,5 Kg / 36,4 Lb	2u

MAX POWER 400W



COD. 5110075
WHITE



SK 106

COD. 5110063

2 Way Fullrange

- Bass speaker unit: 6.5"
- Frequency Response: 50Hz-20KHz
- Sensitivity: 90dB (SPL 1w/1m)
- RMS Power: 100W
- Program Power: 200W
- Peak Power Handling: 400W
- Impedance: 8Ω
- Woofer Cone Material: Mica
- Woofer Magnet Diameter: 100 x 60 x 20 mm
- Woofer Magnet Weight: 20oz
- Woofer Voice Coil: 25 mm (1")
- Tweeter Size: 13 mm (1/2")
- Tweeter Cone Material: Mylar Dome
- Tweeter Magnet Diameter: 45 x 22 x 7 mm
- Tweeter Magnet Weight: 2oz
- Box Material: ABS (plastic)
- Mounting Bracket: Included
- Screw: Included

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
378 x 450 x 546 mm 14,9 x 17,7 x 21,5 In	18,7 Kg / 41,2 Lb	2u

MAX POWER 400W



COD. 5110076
WHITE



SK 106T

COD. 5110064

2 Way Fullrange

- Bass speaker unit:6.5"
- Frequency Response:50Hz-20KHz
- Sensitivity:90dB (SPL 1w/1m)
- RMS Power:100W
- Program Power: 200W
- Peak Power Handling: 400W
- Impedance: 8Ω
- Woofer Magnet Diameter:100 x 60 x 20 mm
- Woofer Magnet Weight: 20oz
- Woofer Voice Coil: 25 mm (1")
- Tweeter: 13 mm (1/2") Mylar Dome
- Tweeter Magnet Diameter: 45 x 22 x 7 mm
- Tweeter Magnet Weight: 2oz
- Box Material: ABS (plastic)
- Mounting Bracket: Included
- Screw: Included
- Autotransformer: 30W-100V-70V–Plus by pass externally switchable


LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
434 x 330 x 552 mm 17,1 x 13 x 21,7 In	13,5 Kg / 29,8 Lb	1u

MAX POWER 500W



COD. 5110077
WHITE



SK 108

COD. 5110065

2 Way Fullrange

- Bass speaker unit:8" (200mm)
- Frequency Response: 40Hz-20KHz
- Sensitivity: 92dB (SPL 1w/1m)
- RMS Power: 125W
- Program Power: 250W
- Peak Power Handling: 500W
- Impedance: 8Ω
- Woofer Cone Material: Mica
- Woofer Magnet Diameter: 110 x 60 x 17
- Woofer Magnet Weight: 25oz
- Woofer Voice Coil: 35 mm (1,4")
- Tweeter Size: 25 mm (1")
- Tweeter Cone Material: Silk Dome
- Tweeter Magnet Diameter: 70 x 32 x 10 mm
- Tweeter Magnet Weight: 6oz
- Box Material: ABS (plastic)
- Mounting Bracket: Included
- Screw: Included

Specifications are subject to change without notice.



EXPAND
THE BOUNDARIES OF SOUND

POWERED COMPACT LOUDSPEAKERS

2 WAY AMPLIFIED STEREO SYSTEM

2 LOUDSPEAKERS INCLUDED / 6”

SK 206A

COD. 5100601

Amplified sound system of 2-way
Maximum power system 360W
System complete range
RCA stereo inputs
6 “ woofer & 1” Tweeter
Two -band equalizer
Wall mount
Bass port

HOT FEATURES

- 2 X 180W MAXIMUM POWER OUTPUT
- 2 BAND EQUALIZER
- WALL MOUNT INCLUDED

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
378 x 450 x 546 mm 14,9 x 17,7 x 21,5 In	18.5 Kg / 40.7 Lb	2u

MAX POWER 360W



2 LOUDSPEAKERS INCLUDED / 8”

SK 208A

COD. 5100602

Amplified sound system of 2-way
Maximum power system 400W
System complete range
RCA stereo inputs
8 “ woofer & 1” Tweeter
Two -band equalizer
Wall mount
Bass port

HOT FEATURES

- 2 X 200W MAXIMUM POWER OUTPUT
- 2 BAND EQUALIZER
- WALL MOUNT INCLUDED

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
418 x 356 x 613 mm 16,5 x 14 x 24,1 In	16.5 Kg / 36.3 Lb	1u

MAX POWER 400W

Specifications are subject to change without notice.

REFERENCE STUDIO MONITOR

NEAR-FIELD-ACTIVE MONITORS: GREAT AND CLEAR SOUND FOR TODAY'S RECORDING PROCESS.



HOT FEATURES

- 2 X 150W MAXIMUN POWER OUTPUT
- HIGH FREQUENCY LEVEL ADJUST
- BALANCED INPUTS
- ULTRA FLAT FREQUENCY RESPONSE



BI-AMPLIFIED

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
682x475x355 mm 24.4 x 47.5 x 14 inch	30.5 kg / 67.24 lb	2u

SK 180

COD. 5110124

Frequency Response	45Hz-20KHz
Low-Frequency driver	8"woofer with Fiber-glass
Woofer Voice coil	1.5"VC shield motor
High-frequency driver	1"slik dome tweeter
Power supply	shield motor
Cabinet Dimensions	115V~50/50Hz or 230V~50/60Hz
(HxWxD)	380*265*325 MM
Cabinet	vinyl-laminated MDF+ABS
Amplifier	1CH Class AB Monitor
RMS Output Power	100W(LF)+50W(HF)
Distortion(THD)	<1%
Signal to Noise Ratio	>90dB
Input Sensitivity	-6dB

Specifications are subject to change without notice.



LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
340 x 280 x 480 mm 13,4 x 11 x 18,9 In	8,6 Kg / 19 Lb	4u

MAX POWER **400W**

SK 150

COD. **5110122**

Frequency Response	60Hz-20KHz
Low-Frequency driver	5.25"woofer with Fiber-glass
Woofer Voice coil	1"VC shield motor
High-frequency driver	0.75"slik dome tweeter shield motor
Power supply	115V~50/50Hz or 230V~50/60Hz
Cabinet Dimensions (HxWxD)	285*185*245 MM
Cabinet	vinyl-laminated MDF+ABS
Amplifier	1CH Class AB Monitor
RMS Output Power	45W(LF)+15W(HF)
Distortion(THD)	<1%
Signal to Noise Ratio	>90dB
Input Sensitivity	-6dB



LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
410 x 325 x 555 mm 16,1 x 12,8 x 21,9 In	12,5 Kg / 27,6 Lb	4u

MAX POWER **400W**

SK 165

COD. **5110123**

Frequency Response	50Hz-20KHz
Low-Frequency driver	6.5"woofer with Fiber-glass
Woofer Voice coil	1.5"VC shield motor
High-frequency driver	1"slik dome tweeter shield motor
Power supply	115V~50/50Hz or 230V~50/60Hz
Cabinet Dimensions (HxWxD)	320*225*295 MM
Cabinet	vinyl-laminated MDF+ABS
Amplifier	1CH Class AB Monitor
RMS Output Power	75W(LF)+25W(HF)
Distortion(THD)	<1%
Signal to Noise Ratio	>90dB
Input Sensitivity	-6dB



LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
465 x 375 x 665 mm 18,3 x 14,8 x 26,2 In	18 Kg / 39,7 Lb	1u

MAX POWER **800W**

SK 100 SUB

COD. **5110125**


Frequency Response	30Hz-16KHz
Low-Frequency driver	10"woofer with IMPP cone
Woofer Voice coil	2"VC shield motor
Power supply	115V~50/50Hz or t230V~50/60Hz
Cabinet Dimensions (HxWxD)	380*335*375 MM
Cabinet	vinyl-laminated MDF
Amplifier	1CH Class AB Monitor
RMS Output Power	180W
Distortion(THD)	<1%
Signal to Noise Ratio	>90dB
Input Sensitivity	-6dB

Specifications are subject to change without notice.


PASSIVE LOUDSPEAKERS

THESE CABINETS MADE FROM INJECTION MOLDED POLYPROPYLENE ARE LIGHT, SOLID AND DURABLE DESIGNED




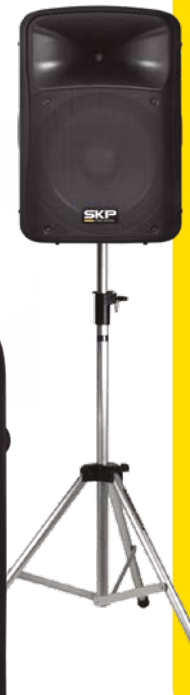


45° FLOOR MONITOR



50° VERTICAL DISPERSION UP TO 20 KHz



90° HORIZONTAL DISPERSION UP TO 20 KHz



MAX POWER 1000W

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
50 x 465 x 760 mm 2 x 18,3 x 29,9 In	20,8 Kg / 45,9 Lb	1u

SK 515i

COD. 5110199

System	Passive Full Range
LF Transducer	15" (2" KSV)
HF Transducer	1.75" VC
Power RMS	250W
Program Power	500W
Peak Power	1000W
Sensitivity	97dB (1W/1m)
Max SPL	127dB
Impedance	8 Ω
Frequency Response	45 Hz - 20KHz
Dispersion	90° x 50°
Crossover Frequency	1.2KHz
Input Conector	Speakon

Specifications are subject to change without notice.



MAX POWER 400W

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
340 x 280 x 480 mm 13,4 x 11 x 18,9 In	8,6 Kg / 19 Lb	1u

COD. 5110200
WHITE

SK 508i

COD. 5110196

System	Passive Full Range
LF Transducer	8" (1.5" KSV)
HF Transducer	1" VC
Power RMS	100W
Program Power	200W
Peak Power	400W
Sensitivity	92dB (1W/1m)
Max SPL	118dB
Impedance	8 Ω
Frequency Response	65 Hz - 18KHz
Dispersion	90° x 50°
Crossover Frequency	1.5KHz
Input Conector	Speakon



MAX POWER 400W

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
410 x 325 x 555 mm 16,1 x 12,8 x 21,9 In	12,5 Kg / 27,6 Lb	1u

SK 510i

COD. 5110197

System	Passive Full Range
LF Transducer	10" (1.5" KSV)
HF Transducer	1" VC
Power RMS	100W
Program Power	200W
Peak Power	400W
Sensitivity	93dB (1W/1m)
Max SPL	119dB
Impedance	8 Ω
Frequency Response	50 Hz - 20KHz
Dispersion	90° x 50°
Crossover Frequency	1.5KHz
Input Conector	Speakon



MAX POWER 800W

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
465 x 375 x 665 mm 18,3 x 14,8 x 26,2 In	18 Kg / 39,7 Lb	1u

SK 512i

COD. 5110198


System	Passive Full Range
LF Transducer	12" (2" KSV)
HF Transducer	1.33" VC
Power RMS	200W
Program Power	400W
Peak Power	800W
Sensitivity	94dB (1W/1m)
Max SPL	124dB
Impedance	8 Ω
Frequency Response	50 Hz - 20KHz
Dispersion	90° x 50°
Crossover Frequency	1.2KHz
Input Conector	Speakon

Specifications are subject to change without notice.

POWERED LOUDSPEAKERS

TWO WAY POWERED

Bluetooth®



45º FLOOR MONITOR

POWERED OUTPUT

COD. 5110205 WHITE

- USB/SD port
- MP3 with independents controls
- LCD display
- XLR/TRS/RCA input
- Woofer 15"
- Driver 2.5" Titanium



READY TO POWER A PASSIVE SPEAKER



SK 5PBT

COD. 5110204

RMS Power: 250W

Program power: 500W
Peak power: 1000W
Frequency response: 40Hz - 18KHz
Woofer Diameter: 38,1cm (15¨)
Magnet: 50 Oz / Coil: 2,5¨ Kapton VC
Sensitivity: 96dB (@1W/1m)
Maximum Sound Pressure Level: 126dB
High frequency driver: 44mm(1,75¨) Titanium
Diaphragm with hyperbolic horn output
Horn: 90º x 50º
Power supply: 110V - 220V – 60/50 Hz



3 INPUT CHANNELS

MAX POWER 1000W

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
500 x 465 x 760 mm 19 x 18,3 x 29,9 In	23 Kg / 50,7 Lb	1u

- USB/SD port
- MP3 with independents controls
- XLR input
- Line output
- Woofer 8¨
- Driver 1¨ Titanium

COD. 5110201 WHITE



MAX POWER 400W

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
340 x 280 x 480 mm 13,4 x 11 x 18,9 In	10 Kg / 22 Lb	1u

SK 1P

COD. 5110191 Bluetooth®

RMS Power: 100W

Program power: 200W
Peak power: 400W
Respuesta en frecuencia: 65Hz - 18KHz
Woofer Diameter: 20,3cm (8¨)
Magnet: 30 Oz / Coil: 1,5¨ Kapton VC
High frequency driver: 25mm Titanium
Diaphragm (1¨) with hyperbolic horn output
Horn: 90º x 50º
Power supply:
110V - 220V – 60/50 Hz
Sensitivity: 92dB
Maximum Sound Pressure Level: 118dB

Specifications are subject to change without notice.

- USB/SD port
- MP3 with independents controls
- XLR input
- Line output
- Woofer 10"
- Driver 1.34" Titanium

3 INPUT CHANNELS

COD. 5110202
WHITE



MAX POWER 600W

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
410 x 325 x 555 mm 16,1 x 12,8 x 21,9 In	15,5 Kg / 34,2 Lb	1u

SK 2P

COD. 5110192

RMS Power: 200W

- Program power: 400W
- Peak power: 800W
- Frequency response: 50Hz - 18KHz
- Woofer Diameter: 30,5cm(12¨)
- Magnet: 40 Oz / Coil: 2,5¨ Kapton VC
- High frequency driver: 34mm (1.34¨) Titanium Diaphragm with hyperbolic horn output
- Horn: 90º x 50º
- Sensitivity: 94dB
- Maximum Sound Pressure Level: 123dB
- Power supply: 110V - 220V - 60/50 Hz

- USB/SD port
- MP3 with independents controls
- LCD display
- XLR input
- Woofer 12"
- Driver 2.5" Titanium

READY TO POWER A PASSIVE SPEAKER

3 INPUT CHANNELS

POWERED OUTPUT



COD. 5110203
WHITE

MAX POWER 800W

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
465 x 375 x 665 mm 18,3 x 14,8 x 26,2 In	16,8 Kg / 37 Lb	1u

SK 3P

COD. 5110193 Bluetooth®

RMS Power: 150W

- Program power: 300W
- Peak power: 600W
- Frequency response: 55Hz - 18KHz
- Woofer Impedance: 4Ω
- Woofer Diameter: 25,4cm (10¨)
- Magnet: 30 Oz / Coil: 1,5¨ Kapton VC
- Compression Driver Impedance: 8Ω
- High frequency driver: 34mm Titanium
- Diaphragm (1.34¨) with hyperbolic horn output
- Horn: 90º x 50º
- Power supply: 110V - 220V – 60/50 Hz

- USB/SD port
- MP3 with independents controls
- LCD display
- XLR/TRS/RCA input
- Woofer 15"
- Driver 2.5" Titanium

4 INPUT CHANNELS



MAX POWER 1000W

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
500 x 465 x 760 mm 19 x 18,3 x 29,9 In	23 Kg / 50,7 Lb	1u

SK 4P

COD. 5110206 Bluetooth®

RMS Power: 250W

- Program power: 500W
- Peak power: 1000W
- Frequency response: 40Hz - 18KHz
- Woofer Diameter: 38,1cm (15¨)
- Magnet: 40 Oz / Coil: 2,5¨ Kapton VC
- High frequency driver: 44mm(1,75¨) Titanium Diaphragm with hyperbolic horn output
- Horn: 90º x 50º
- Sensitivity: 94dB
- Maximum Sound Pressure Level: 124dB
- Power Supply: 110V - 220V - 60/50 Hz

Specifications are subject to change without notice.

ACTIVE LOUDSPEAKERS



Q12/15 CLASS D

DSP

DIGITAL SIGNAL PROCESSOR



MODE

- Get the most out of the system by setting the mode according to the sound reinforcement situation.



LOCATION

- Optimizes the system for both PA and floor monitor.



EQ

- 3-band digital equalizer to control the frequency spectrum according to the need.



LOW CUT

- Low cut with selectable frequencies to complement the system with an external subwoofer.



DELAY

- Uses the delay to adjust the phase between systems located at distances from each other.

BI-AMPLIFIED LOUDSPEAKER



LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
630 x 395 x 760 mm 24,8 x 15,6 x 29,9 In	34,5 Kg / 76,1 Lb	1u

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
630 x 395 x 760 mm 24,8 x 15,6 x 29,9 In	34,5 Kg / 76,1 Lb	1u

	Q 12 COD. 5110103	Q 15 COD. 5110103
Speaker Type	2-way, Bi-amp powered speaker, Bass-reflex type	
Frequency Response (-10dB)	50Hz-20kHz	45Hz-20kHz
Coverage	90° Horizontal / 60° Vertical	
Low Frequency Driver	12"	15"
	2" Voice Coil	
High Frequency Compression Driver	1" Throat / 1.44" Voice Coil	
Crossover Frequency	2.4kHz	
Power Rating	1000W	
LF Power Rating	700W	
HF Power Rating	300W	
Max SPL	126dB	127dB
Input Sensitivity Line	OdBu	
Input Sensitivity Mic	-40dBu	
Input Connectors	CH 1: XLR/Input Combo Jack	
	CH 2: XLR/Input Combo Jack + 3.5mm Jack	
Power Supply	110V-220V~60/50Hz	
Consumption	689W	
Material	Rugged Molded Plastic	
Color	Black	
Handles	Top x 1 , Side x 2	
Flying Hardware	Top x 2 , Back x 1	
Pole Socket	Botton x 1 (35mm)	
Dimension (W x H x D)	15x25x14(in)	18x28x15(in)
Weight (net)	37.4lb	44.5lb


Specifications are subject to change without notice.

VARIOUS FORMS OF USE


- IT CAN BE USED WITH TRIPOD
- 45º FLOOR MONITOR
- RIGGING SYSTEM








LIVE CONCERT



MONITOR



SOLOIST ARTIST




SPEECH

BI-AMPLIFIED COAXIAL MONITOR




BI-AMPLIFIED



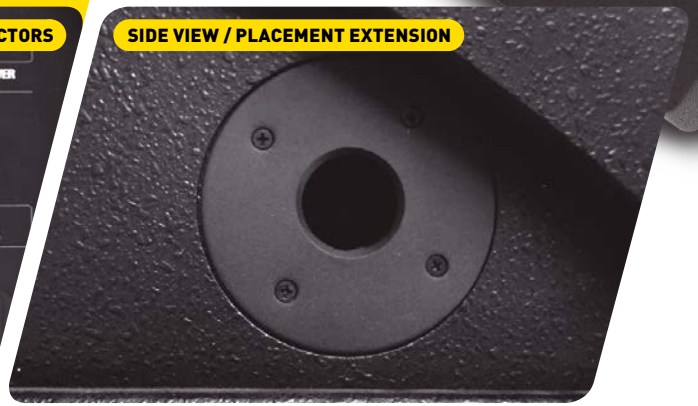

SIDE VIEW / PLACEMENT EXTENSION

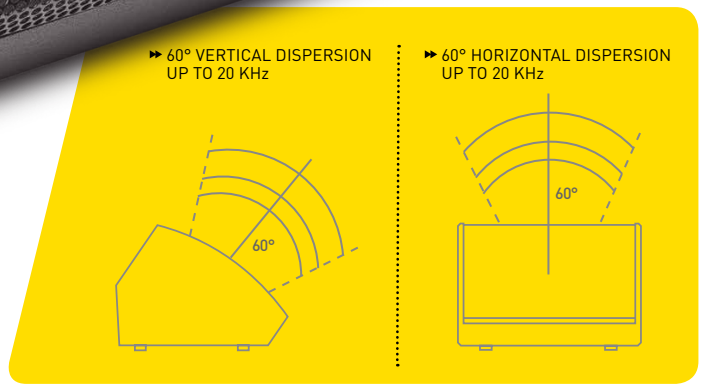



COAXIAL
STAGE MONITOR

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
580 x 480 x 680 mm 22,8 x 18,9 x 26,8 In	22 Kg / 48 Lb	2u

MAX POWER **1400W**

SKM 15A

COD. **5110121**

Low frequency : 15" VC 3"

- Hi frequency: 1.35" Titanium
- Frequency response: 55Hz – 20KHz
- Coverage pattern: 60°x60°
- Amplifier Lo/Hi: Class D/Class AB
- RMS power: 350W
- Program power:700W
- Peak power: 1400W
- Crossover frequency: 2.5KHz
- Input/link connector: XLR-TRS/XLR
- AC input: 110/220V ~ 60/50Hz

HOT FEATURES

- **POWER LED INDICATOR**
- **MIC/LINE SWITCH**
- **BALANCED XLR AND TRS INPUT**
- **XLR LINK OUTPUT**



COAXIAL
STAGE MONITOR

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
520 x 450 x 580 mm 20,5 x 17,7 x 22,8 In	19,5 Kg / 42 Lb	2u

MAX POWER **1200W**

SKM 12A

COD. **5110120**

Low frequency : 12" VC 2.5"


- Hi frequency: 1.35" Titanium
- Frequency response: 60Hz – 20KHz
- Coverage pattern: 60°x60°
- Amplifier Lo/Hi: Class D/Class AB
- RMS power: 300W
- Program power: 600W
- Peak power: 1200W
- Crossover frequency: 3KHz
- Input/link connector: XLR-TRS/XLR
- AC input: 110/220V ~ 60/50Hz

HOT FEATURES

- **POWER LED INDICATOR**
- **MIC/LINE SWITCH**
- **BALANCED XLR AND TRS INPUT**
- **XLR LINK OUTPUT**

Specifications are subject to change without notice.

ACTIVE LOUDSPEAKERS

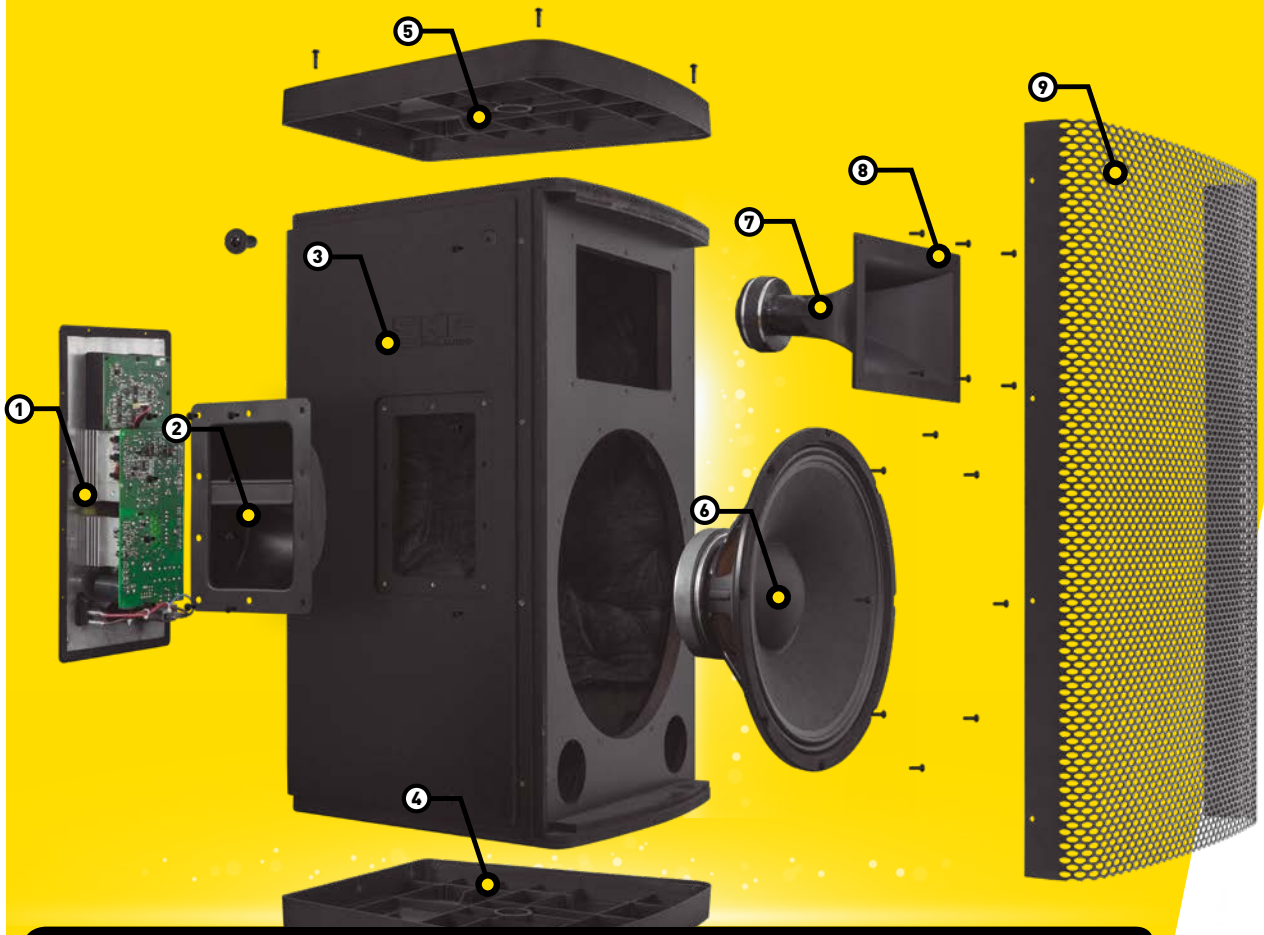

ACTIVE LOUDSPEAKERS EXPLODED VIEW

1. EFFICIENT CLASS D DIGITAL AMPLIFIER
2. ERGONOMICS SIDE HANDLES
3. HEAVY DUTY FINISH BASS-REFLEX
4. INTEGRATED 36 MM POLE MOUNT SOCKET
5. HIGH DENSITY PLASTIC COVERS
6. HIGH SENSITIVITY POWERFUL 15" WOOFER
7. 1.35" TITANIUM DIAPHRAGM COMPRESSION
8. CONSTANT DIRECTIVITY HORN
9. RUGGED STEEL GRILLE



LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
865 x530x515mm 34,06 x20,87x20,28in	26.5kg52,8lb	1u

POWER **RATING 1500W**

SKX 152A

COD. **5110126**

System Type: Self Powered 15", two-way, bass-reflex

- Maximum SPL Output: 136dB peak
- Frequency Response (±2.8 dB): 45Hz - 20KHz
- Input Connectors: 2 x Balanced XLR + 1/4 inch input
- Input sensibility: user selectable LINE/MIC
- Input Impedance: 20KΩ (balanced), 10KΩ (unbalanced)
- Led Indicators: Signal / Limit / Power
- EQ: User selectable DSP presets FLAT / CONTOUR / VOCAL
- HPF: User selectable 75Hz / FULL RANGE
- Topology: LF Class-D amplifier + HF Class-AB amplifier
- Max Power: 1600W (LF: 1200W + HF:400W)
- RMS Power: 400W (LF: 300W + HF:100W)
- LF Driver: 15"
- HF Driver: 1.35" 34mm Titanium diaphragm
- Coverage Pattern: 90° x 50°
- Enclosure: Symmetrical, MDF HEAVY DUTY FINISH
- Suspension / Mounting: 36 mm pole socket, 12 x M10 Suspension Points

Specifications are subject to change without notice.



SKX 215A

COD. 5110106

System Type: Self Powered Dual 15", two-way, bass-reflex	Topology: LF Class-D amplifier + HF Class-AB amplifier
Maximum SPL Output: 139dB peak	Power Rating: 1700W (LF: 1300W + HF: 400W)
Frequency Response (±2.8 dB): 40Hz - 20KHz	Max Power: 2000W (LF: 1600W + HF:400W)
Input Connectors: 2 x Balanced XLR + 1/4 inch input	RMS Power: 500W (LF: 400W + HF:100W)
Input sensibility: user selectable LINE/MIC	LF Driver: 2x15"
Input Impedance: 20KΩ (balanced), 10KΩ (unbalanced)	HF Driver: 1.75" Titanium diaphragm
Led Indicators: Signal / Limit / Power	Coverage Pattern: 90° x 50°
EQ: User selectable DSP presets FLAT / CONTOUR / VOCAL	Enclosure: Symmetrical, MDF HEAVY DUTY FINISH
HPF: User selectable 75Hz / FULL RANGE	Suspension: 12 x M10 Suspension Points

1700W POWER RATING

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
530x515x1300mm 20,86x20,27x51,18in	42kg/92.54lb	1u

1900W POWER RATING

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
785/670/745mm 31x27,35x26,29.33in	46kg/101.2lb	1u

SKX 118SA

COD. 5110107

System Type: Self Powered 18", subwoofer, bass-reflex
Maximum SPL Output: 134dB peak
Frequency Response (±2.8 dB): 35Hz - 150KHz
Input Connectors: Dual Balanced XLR + 1/4 inch input
Input sensibility: LINE
Input Impedance: 20KΩ (balanced), 10KΩ (unbalanced)
Output Connector: Dual XLR balanced
Led Indicators: Signal / Limit / Power
Phase: polarity selectable
Crossover: 90Hz-120Hz Selectable for satellite
Topology: Class-D amplifier
Power Rating: 1900W
RMS Power: 600W
LF Driver: 18" 3"
Enclosure: Symmetrical, MDF HEAVY DUTY FINISH
Mounting: 36 mm pole socket



Specifications are subject to change without notice.

QW DSP SERIES

CLASS D

12" / 15" POWERED LOUDSPEAKER





LCD DISPLAY
Access all DSP functions and load presets, make precise adjustments to PEQ, levels, delay, cross-over, phase, etc. via the intuitive LCD display.

QLINEAR MAX™ · QPHASE™ · DIRECT WAVE™

- INTELLIGENT VARIABLE SPEED FAN
- ULTRA-DURABLE WOODEN CABINETS
- INTERNAL COOLING SYSTEM AND OPTIMIZED THERMAL PERFORMANCE AMPLIFIER

BIAMPLIFIED - **1500W**

High-efficiency Class D power amplifier for low frequencies and Class AB for high frequencies provides 1500 W power rating and 134dB SPL.
A universal power supply with voltage switch selector maximizes power output while ensuring stable and worry-free operation.

- REINFORCED MOUNTING POINTS
- DOUBLE ALUMINUM POLE MOUNT

FEATURES

- System Type: Self Powered 15", two-way, bass-reflex
- 4 BAND FULL PARAMETRIC EQ: Gains, Q and frequency
- Cross-Over SUB frecuency selector 80-150 Hz (1Hz steps)
- Delay: set to 0-300ms (0 - 100 meters)
- Polarity: 0 / 180°
- Mode: MUSIC / SPEECH / LIVE / DJ
- Location: NORMAL / MONITOR
- Load / Store presets
- LED mode ON/OFF
- LCD DIM/ BRIGHT / CONTRAST

QW 12 / 15

COD. **5110126**

SPECIFICATIONS

Type: 2-way, BiAmplified	
Power Rating: 1500W	
Maximum SPL: 132dB / **134dB**	
Frequency Range (-10 dB): 45,7Hz - 20,6Hz / **40,38Hz - 20,5KHz**	
Frequency Response (±3 dB): 55,6Hz - 19,5Hz / **50,525Hz - 18,8KHz**	
Amplifier: LF: Class D / HF: Class AB	
Coverage Pattern: 90° x 50°	
AC Power Input: AC 110/220V~60/50Hz	

Specifications are subject to change without notice.

MULTIPURPOSE SYSTEM

- Stage monitor
- Livesound
- Dance Music
- DJs
- Instalations
- Musical Instruments
- Hand-Held Microphones





Exclusive SKP PRO AUDIO design





PLYWOOD BIRCH
WITH BLACK PAINT

EXTREMELY DURABLE PLYWOOD
FOR DEMANDING APPLICATIONS

QLINEAR MAX™ QPHASE® DIRECT WAVE™



1500 POWER RATING

- REINFORCED MOUNTING POINTS
- 2 X 15" WOOFER

FEATURES

- 4 BAND FULL PARAMETRIC EQ: Gains, Q and frequency
- Cross-Over SUB frecuency selector 80-150 Hz (1Hz steps)
- Delay: set to 0-300ms (0 - 100 meters)
- Polarity: 0 / 180°
- Mode: MUSIC / SPEECH / LIVE / DJ
- Location: NORMAL / MONITOR
- Load / Store presets
- LED mode ON/OFF
- LCD DIM/ BRIGHT / CONTRAST

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
630 x 395 x 760 mm 24,8 x 15,6 x 29,9 In	34,5 Kg / 76,1 Lb	1u

QW 215 COD. 5110126

SPECIFICATIONS

- Type: Dual 15" 2-way, BiAmplified
- Power Rating: 1500W
- Maximum SPL: 138dB
- Frequency Range (-10 dB): 39Hz - 20,5KHz
- Frequency Response (±3 dB): 45,5Hz - 18,6KHz
- Amplifier: LF: Class D / HF: Class AB
- Coverage Pattern: 90° x 50°
- AC Power Input: AC 110/220V~60/50Hz

Specifications are subject to change without notice.



QMAX SERIES

80HZ-150HZ
1HZ STEPS SELECTABLE

4 BAND FULL PEQ

FEATURES

- System Type: Self Powered 15", two-way, bass-reflex
- 4 BAND FULL PARAMETRIC EQ: Gains, Q and frequency
- Cross-Over SUB frecuency selector 80-150 Hz (1Hz steps)
- Delay: set to 0-300ms (0 - 100 meters)
- Polarity: 0 / 180°
- Mode: MUSIC / SPEECH / LIVE / DJ
- Location: NORMAL / MONITOR
- Load / Store presets
- LED mode ON/OFF
- LCD DIM/ BRIGHT / CONTRAST

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
630 x 395 x 760 mm 24,8 x 15,6 x 29,9 In	34,5 Kg / 76,1 Lb	1u

QW 18S COD. 5110126

SPECIFICATIONS

- Type: 18" Subwoofer
- Power Rating: 1500W
- Maximum SPL: 135dB
- Frequency Range (-10 dB): 30Hz - 138KHz
- Frequency Response (±3 dB): 38,7Hz – 114,2Hz
- Amplifier: Class D
- Low Pass: 80-150Hz Adjustable (Step: 1Hz)
- AC Power Input: AC 110/220V~60/50Hz

Specifications are subject to change without notice.

LINE ARRAY ACTIVE SYSTEM



PLYWOOD BIRCH
WITH BLACK PAINT

EXTREMELY DURABLE PLYWOOD
FOR DEMANDING APPLICATIONS

VLS X10
10" TWO-WAY LINE ARRAY

FEATURES

Continuous power	Frequency response	Max SPL
800W	**(-3dB) 80Hz-18kHz**	**133dB**

- 10" LOW-MID FREQUENCY DRIVER
- 3" VC COMPRESSION DRIVER
- OPTIMIZED MOTOR AND SUSPENSIONS
- HIGH-EFFICIENCY COOLING SYSTEM

100H° x 7°V COVERAGE

LAMBDA ZERO® waveguide



ANTI VIBRATION
& WATER PROOF CANVAS BAG



LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
630 x 395 x 760 mm 24,8 x 15,6 x 29,9 In	34,5 Kg / 76,1 Lb	1u

VLS X10

COD. 5110126

DRIVER		WOOFER	CABINET
High SPL Compression Driver	Uniform pressure level	10" low-mid frequency driver	Baltic birch plywood
3" voice coil	Quick and precision rigging poits	2.5" voice coil	High resistance finish coverage
Neodymium structure	0 to 7 adjustment angles	Optimized motor and suspensions	Side handles for easy positioning
100°H x 7°V constant directivity pattern horn	Rugged and strong materials	High-efficiency cooling system	Dual Angle Pole Socket
LambdaZero™ waveguide	Adjustment of angle in central axis	On phase front wave	
Minimizes distortion			

Specifications are subject to change without notice.



FEATURES

Frequency response
(-3dB) 35-120Hz

MAX SPL
135DB

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
630 x 395 x 760 mm 24,8 x 15,6 x 29,9 In	34,5 Kg / 76,1 Lb	1u

VLS X18S

COD. 5110126

COMPONENTS & AMPLIFIER	INPUT PANEL & DSP CONTROLLER	ENCLOSURE, PROTECTION & MOUNTING
18" Low Frequency Woofer	Low Noise 32-bit DSP circuit	Bantic Birch Plywood
4" Voice Coil	USB / RJ45 DSP Remote Control	Customized Padded Protective Cover
Class D amplifier		
Continuous Power 1500W SUB + 2x 800W SAT		


Specifications are subject to change without notice.

ANTI VIBRATION
& WATER PROOF CANVAS BAG





VLS **XPOLE**
SATELLITE MOUNT

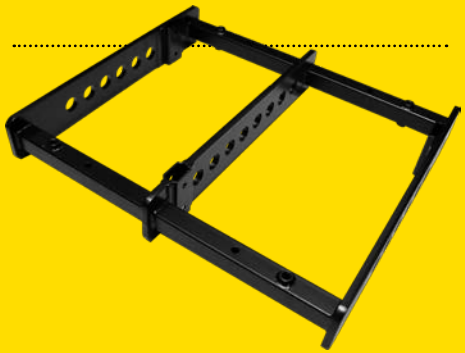

VLS **XFRAME**
SATELLITE MOUNT


PASSIVE LOUDSPEAKERS

GREAT LOW END RESPONSE,HIGH FREQUENCY CLARITY, SHOW AFTER SHOW!

HIGH-PERFORMANCE PASSIVE LOUDSPEAKERS THAT COMPLEMENT PORTABLE AND HIGH-END CLUB SYSTEM APPLICATIONS

The Club Line delivers extreme accuracy at high sound pressure levels, while retaining a very natural sound. Incorporating advanced high-efficiency SKP Pro drivers, matched with precision crossovers; the Club Line provides a smart and affordable upgrade to existing club and rental installations.



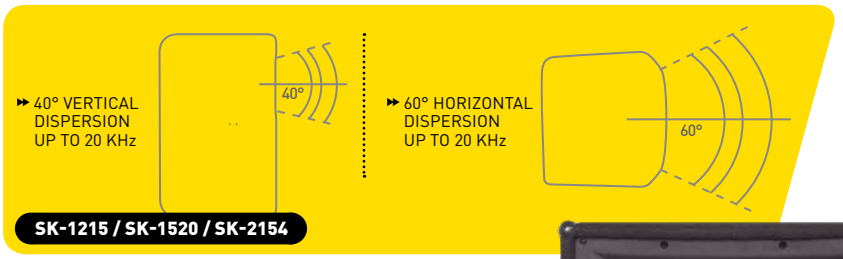

SK-1215 / SK-1520 / SK-2154



LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
870 x 430 x 755 mm 34,3 x 16,9 x 29,7 In	22 Kg / 48,5 Lb	1u

MAX POWER 600W



LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
890 x 460 x 820 mm 35 x 18,1 x 32,3 In	25,4 Kg / 56 Lb	1u

MAX POWER 800W



LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
890 x 460 x 1235 mm 35 x 18,1 x 48,6 In	39 Kg / 86 Lb	1u

MAX POWER 1400W



LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
989 x 560 x 750 mm 38,9 x 22 x 29,5 In	34 Kg / 75 Lb	1u

MAX POWER 1000W


SK 1215 COD. **5110089**	**SK** 1520 COD. **5110091**	**SK** 2154 COD. **5110092**	**SK** 1825 COD. **5110093**
Two-Way Full Range Enclosure	Two-Way Full Range Enclosure	Two-Way Full Range Enclosure	Vented Bass Subwoofer Enclosure
12" Heavy Duty Woofer (2"VC)	15" Heavy Duty Woofer (2,5" VC)	2x15" Heavy Duty Woofer (2,5" KSV)	18" Heavy Duty Woofer
1" HF Titanium Compression Driver (1,44" V.C.)	1" HF Titanium Compression Driver (1,75" V.C.)	1" HF Titanium Compression Driver (1,75" V.C.)	Continuous Power: 250w
60 x 40° Constant Directivity Horn	60 x 40° Constant Directivity Horn	60 x 40° Constant Directivity Horn	Program Power: 500W
Continuous Power: 150W	Continuous Power: 200W	Continuous Power: 350W	Peak Power: 1000W
Program Power: 300W	Program Power: 400W	Program Power: 700W	Frequency Range: 38Hz - 500 Hz
Peak Power: 600W	Peak Power: 800W	Peak Power: 1400w	Sensitivity: 97dB (1w/m)
Frequency Range: 60Hz - 18 KHz	Frequency Range: 40Hz - 18KHz	Frequency Range: 38Hz - 18KHz	Nominal Impedance: 8Ω
Sensitivity: 94dB (1w/m)	Sensitivity: 96dB (1w/m)	Sensitivity: 98dB (1w/m)	Input Connections: Speakon & ¼" Phone Jack
Nominal Impedance: 8Ω	Nominal Impedance: 8Ω	Nominal Impedance: 4Ω	Enclosure Finish: Black carpet
Crossover Frequency: 2.5 KHz	Crossover Frequency: 2.5 KHz	Crossover Frequency: 2.5 KHz	Dimensions (WxDxH):(64.5+54)x56x76 cm.
Enclosure Finish: Black carpet	Enclosure Finish: Black carpet	Enclosure Finish: Black carpet	(253/8"+217/64")x22"x297/8"
Input Connections: Speakon & ¼" Phone Jack	Input Connections: Speakon & ¼" Phone Jack	Input Connections: Speakon & ¼" Phone Jack	Net Weight: 32Kg
Dimensions (WxDxH): (53+34)x43x76.5 cm.	Dimensions (WxDxH): (53+36)x46x83 cm.	Dimensions (WxDxH): (53+36)x46x123.5 cm.	
(207/8"+14")x1659/64"x301/8"	(207/8"+14")x181/8"x3243/64"	(207/8"+14")x181/8"x485/8"	
Net Weight: 20Kg	Net Weight: 23Kg	Net Weight: 37Kg	

Specifications are subject to change without notice.

SYSTEMS LOUDSPEAKERS



Dee-Jay-Line Loudspeaker Systems Series is an international bestseller, thanks to its highly popular position in terms of technological level and price.

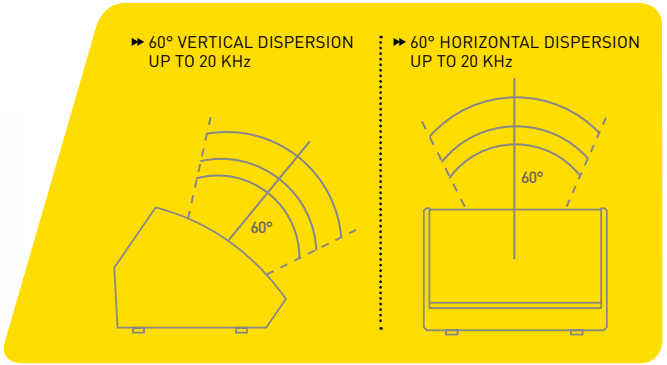

COAXIAL STAGE MONITOR



LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
510 x 490 x 715 mm 20,1 x 19,3 x 28,1 In	27 Kg / 59,5 Lb	1u

MAX POWER 800W

SK 15 MI

COD. 5110104

Low frequency : 15" VC 3.5"

Hi frequency: 1.35" Titanium

Frequency response: 65 Hz – 20 KHz

Coverage pattern: 60°x60°

Impedance: 8Ω

RMS power: 200W

Program power: 400W

Peak power: 800W


Crossover frequency: 3.5 KHz


Maximum SPL(1m): 125dB

Input connector: 1/4"phone jack+Speakon

Specifications are subject to change without notice.

SK-112 I / SK-115 I / SK-215 I

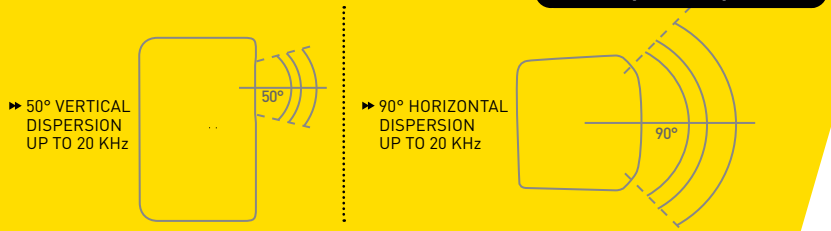


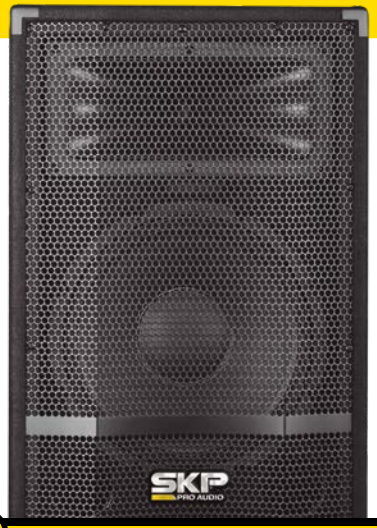

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
1190 x 930 x 720 mm 46,9 x 36,6 x 28,3 In	78 Kg / 172 Lb	1u

MAX POWER 600W

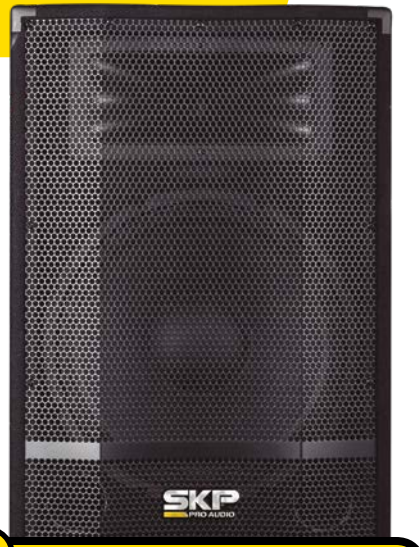

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
60 x 57,5 x 126 mm 23,6 x 22,6 x 49,6 In	52 Kg / 114,6 Lb	1u


MAX POWER 800W



LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
53 x 51,5 x 129 mm 20,9 x 20,3 x 50,8 In	43 Kg / 94,8 Lb	1u

MAX POWER 1600W

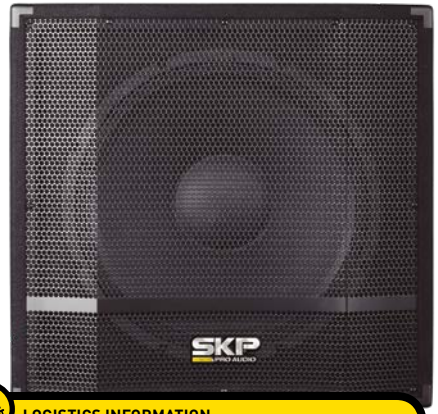

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
53 x 51,5 x 86,5 mm 20,9 x 20,3 x 34,1 In	32 Kg / 70,5 Lb	1u

MAX POWER 1800W

SK 112 I COD. 5110110	**SK** 115 I COD. 5110111	**SK** 215 I COD. 5110112	**SK** 118 I COD. 5110113
Low frequency : 12" VC 1.5"	Low frequency : 15" VC 2"	Low frequency : 15" x2 VC 2"	Low frequency : 18" VC 3"
Hi frequency: 1" Polyamide	Hi frequency: 1" Polyamide	Hi frequency: 1.35" Titanium	Hi frequency: -
Frequency response: 55Hz – 20KHz	Frequency response: 50Hz – 20KHz	Frequency response: 45Hz – 20KHz	Frequency response: 35Hz – 300Hz
Coverage pattern: 90°x50°	Coverage pattern: 90°x50°	Coverage pattern: 90°x50°	Coverage pattern: Omnidirectional
Impedance: 8Ω	Impedance: 8Ω	Impedance: 4Ω	Impedance: 8Ω
RMS power: 150W	RMS power: 200W	RMS power: 400W	RMS power: 450W
Program power: 300W	Program power: 400W	Program power: 800W	Program power: 900W
Peak power: 600W	Peak power: 800W	Peak power: 1600W	Peak power: 1800W
Crossover frequency: 4 Khz	Crossover frequency: 4 Khz	Crossover frequency: 4 Khz	Crossover frequency: -
Maximum SPL(1m): 120dB	Maximum SPL(1m): 122dB	Maximum SPL(1m): 125dB	Maximum SPL(1m): 125dB
Input connector: 1/4"phone jack+Speakon	Input connector: 1/4"phone jack+Speakon	Input connector: 1/4"phone jack+Speakon	Input connector: 1/4"phone jack+Speakon

Specifications are subject to change without notice.

SYSTEMS
LOUDSPEAKERS









LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
555 x 700 x 425 mm 21,9 x 28 x 16,7 In	21 Kg / 46,3 Lb	1u

MAX POWER 7200W

SYSTEM LOUDSPEAKERS EXPLODED VIEW

1. SPEAKON CONNECTORS
2. PHASE ALIGNED CROSSOVER
3. PLYWOOD BIRCH
4. HIGH SENSITIVITY WOOFER 3"VC
5. 2.5" TITANIUM DIAPHRAGM + FERROFLUID
6. WAVEGUIDE CONSTANT DIRECTIVITY HORN
7. HEXAGONAL GRID
8. RIGGING SYSTEM

DUAL 18" PASSIVE SUBWOOFER

SK 7218 TOP SUB

COD. 5110119

Passive dual18" subwoofer speaker

- Sensitivity: 99dB/m/W
- Power handling: 1800W RMS
- Nominal Impedance: 4Ω
- Frequency Range: 35Hz-800Hz
- Crossover Frequency: By-Pass
- Maximum Output Level: 134dB (1m)
- LF driver: 2*18" (46cm) cone driver
- 2*Speakon connector
- Plywood cabinet with black paint

Specifications are subject to change without notice.



PLYWOOD BIRCH
WITH BLACK PAINT

EXTREMELY DURABLE PLYWOOD
FOR DEMANDING APPLICATIONS



LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
580 x 480 x 680 mm 22,8 x 18,9 x 26,8 In	42 Kg / 92.5 Lb	1u

MAX POWER 3600W

18" PASSIVE SUBWOOFER

SK 7018 TOP SUB COD. 5110117

Passive 18'' subwoofer speaker
Sensitivity: 96dB/m/W
Power handling: 900W RMS
Nominal Impedance: 8Ω
Frequency Range: 35Hz-800Hz
Crossover Frequency: By-Pass
Maximum Output Level: 128dB (1m)
LF driver: 1x18" (46cm) cone driver
2* Speakon connector
Plywood cabinet with black paint



LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
520 x 450 x 580 mm 20,5 x 17,7 x 22,8 In	19 Kg / 41,9 Lb	1u

MAX POWER 1600W

2 WAY - 12" PASSIVE SPEAKER

SK 7012 TOP COD. 5110114

Passive 12'' 2 way full-range speaker
Sensitivity: 96dB/m/W
Power handling: 400W RMS
Nominal Impedance: 8Ω
Frequency Range: 50Hz-20KHz
Crossover Frequency: 2.5KHz
Maximum Output Level: 125dB (1m)
LF driver: 12" (30cm) cone driver with 3'' voice coil and 70oZ magnet
HF driver: 1.75" (4.4cm) compression driver
2* Speakon connector
Plywood cabinet with black paint



LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
635 x 365 x 485 mm 25 x 14,4 x 19,1 In	25 Kg / 55,1 Lb	1u

MAX POWER 1800W

2 WAY - 15" PASSIVE SPEAKER

SK 7015 TOP COD. 5110115

Passive 15'' 2 way full-range speaker
Sensitivity: 97dB/m/W
Power handling: 450W RMS
Nominal Impedance: 8Ω
Frequency Range: 45Hz-20KHz
Crossover Frequency: 2.5KHz
Maximum Output Level: 126dB (1m)
LF driver: 15" (38.5cm) cone driver with 3'' voice coil and 70oZ magnet
HF driver: 2.5" (6.0cm) compression driver
2* Speakon connector
Plywood cabinet with black paint



LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
700 x 665 x 745 mm 27,6 x 26,2 x 29,3 In	61 Kg / 134.5 Lb	1u

MAX POWER 4000W

2 WAY - DUAL 15" PASSIVE SPEAKER

SK 7215 TOP COD. 5110116

Passive dual15'' 2 way full-range speaker
Sensitivity: 99dB/m/W
Power handling:1000W RMS
Nominal Impedance: 4Ω
Frequency Range: 40Hz-20KHz
Crossover Frequency: 2KHz
Maximum Output Level: 130dB (1m)
LF driver: 2*15" (38.5cm) cone driver
HF driver: 3" (7.5cm) compression driver
2* Speakon connector
Plywood cabinet with black paint

Specifications are subject to change without notice.

LINE ARRAY SYSTEMS


SKP CHURCH LINE ARRAY BRINGS TO YOU A SPECIFIC SOLUTION FOR THE UNIVERSAL SONIC PURITY

- Over the last 25+ years we have had the privilege of interacting with thousands of music pastors, senior pastors, technical staff and volunteers so we believe like you that the word of God knows no bounds.
- The right solution to improve your praise band, choir sound system, or for a simple reading of the Holy Scriptures, SKP Church Line Array delivers exceptional voice and music quality to more than 36 overseas countries and locations around the world.
- Besides that, SKP Church Line is designed to preserve the subtle aesthetics of a church's sanctuary with unobtrusive loudspeakers available in white or black, for colour matching to any décor.

LOGISTICS INFORMATION


MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
250x245x630 mm 10x9.6x25 in	6.5 kg	1u

MAX POWER 800W

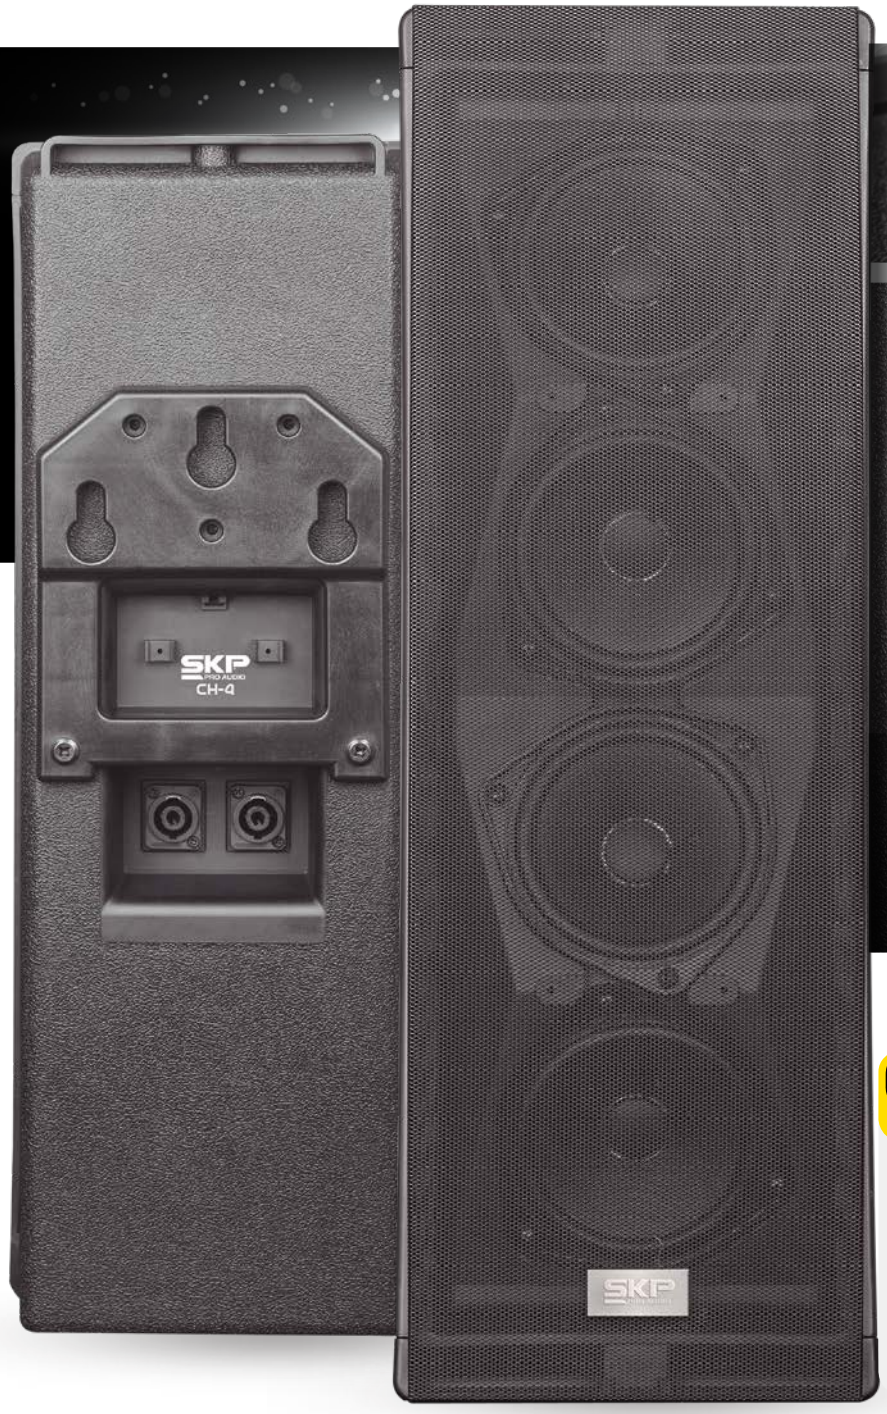



TOP VIEW

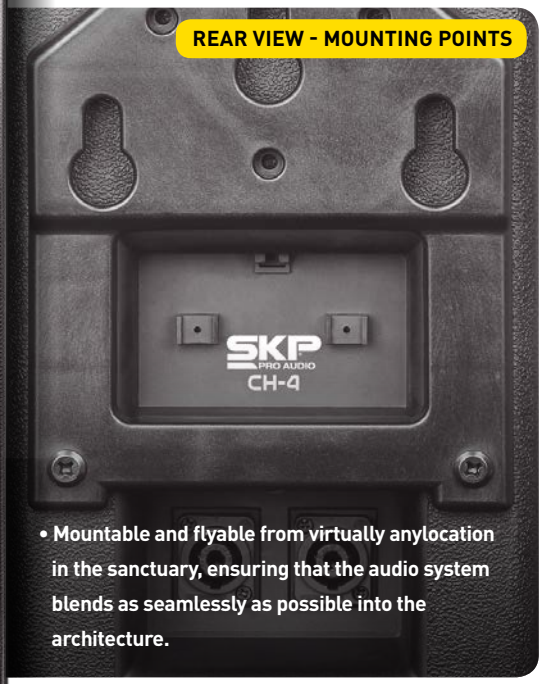

REAR VIEW - MOUNTING POINTS

- **Mountable and flyable from virtually anylocation in the sanctuary, ensuring that the audio system blends as seamlessly as possible into the architecture.**

COD. **5110184**
WHITE

CH 4


COD. **5110178**

Line Array Series

2 Ways
RMS Power: 200W
Peak Power: 800W
Frequency Response: 80Hz - 18KHz
Speaker: 3 x 4,5" LF / 1 x 4,5" HF
Dimensions (HxDxW): 23"x7$^{4/5}$"x6$^{1/8}$"(585x200x155mm)
Weight: 14 lbs. (6,2Kg)

Specifications are subject to change without notice.





MULTIFOCUS SPEAKER COVERAGE TECHNOLOGY

Multi-radius curve provides long-throw/medium throw and nearfield coverage from the same enclosure

COD. 5110183 WHITE

CH 16 HEAVEN

COD. 5110177

RMS Power: 200W RMS 8Ω

- Peak Power: 800W
- Frequency response: 120Hz to18KHz
- Sixteen 2" high-performance neodymium speakers
- Dual-radius curve provides long- throw and nearfield coverage from one enclosure
- Increased flexibility of flying height with dual pattern
- Near-field pattern attenuation switch for improved flexibility
- Processor-based crossover and EQ for maximum performance
- Barrier strip inputs
- Flying points included for suspension
- Dimensions (HxWxD): 40"x 10" x 313/16" | (1016x254x97mm)
- Weight: 12 lbs.(5,4Kg)

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
500x350x300 mm 20x14x12 in	14.5 kg	1u

MAX POWER 800W





COD. 5110182 WHITE

CH 10SUB EARTH

COD. 5110176


Line Array Series CH-10

- RMS Power: 200W - 8Ω
- Peak Power: 800W
- Frequency Response: 61Hz - 125KHz
- 10" Steel Frame
- 65mm Voice Coil
- Magnet: 60 OZ
- Dimensions (HxDxW):171/8"x101/4"x123/4" (435x260x325mm)
- Weight: 24 lbs.(10,9Kg)

Specifications are subject to change without notice.

SONIC PURITY

CH16-HEAVEN Its Tri-coverage pattern provides a tight 20° vertical coverage for the primarylong-throw pattern, 30° vertical coverage for the secondary mid-field pattern and a 40° vertical coverage for the third near-field pattern.

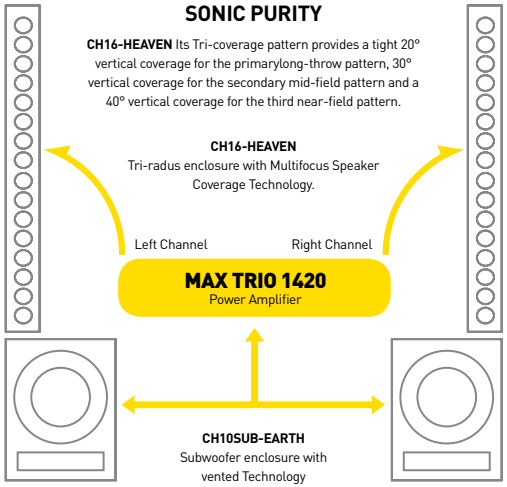

The right solution to one-room chapels or small congregation of 500 people. Fell free to grow into a mega-churche our highly flexible output system allows you to expand.

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
1040x320x160 mm 41x13x6.2 in	11kg / 24lb	1u

MAX POWER 800W

MAX POWER 2000W/CLASS D

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
530 x 360 x 170 mm 20,9 x 14,2 x 6,7 In	6,26 Kg / 13,8 Lb	1u




MAX TRIO 1420 SPIRIT

COD. 5102942

2Ω: 2x400W Stereo - 600W Sub	Channel Crosstalk Power Output: >70dB
4Ω: 2x250W Stereo - 350W Sub	Imput impedance: 20KΩ balanced
8Ω: 2x125W Stereo - 175W Sub	or 10Kohm unbalanced
THD (1KHz-8 OHMS): <0,05%	Damping Factot: >200
Frequency Response: 20 Hz-20 KHz +/- 1 dB	S/N Rate: >96dB

COMPONENTS HF DRIVERS

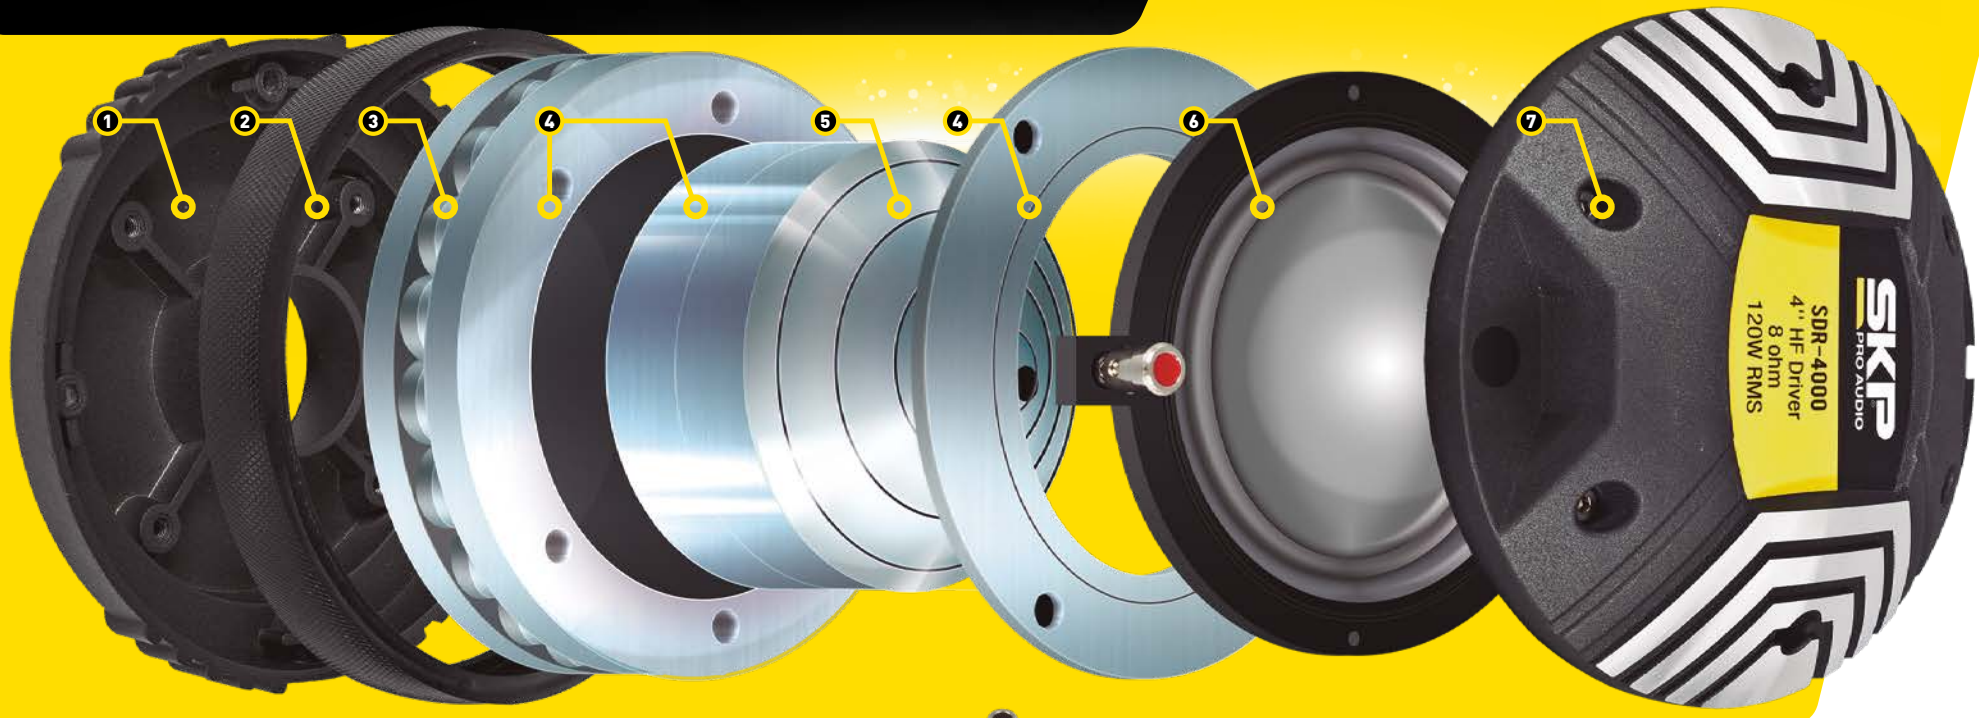

COMPRESSION DRIVER
EXPLODED VIEW

1. Aluminium front cover
2. Neodymium magnet cover
3. High performance Neodymium magnet
4. Superior magnetic flux pole plate + Ferrofluid
5. Equal path phase plug
6. Increased stiffness titanium diaphragm
7. Alumium cover with internal acoustic foam



LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
24 x 52,5 x 52,5 mm 9,4 x 20,7 x 20,7 In	12,3 Kg / 27,1 Lb	4u

SDR 4000

COD. 5110259

240W PROGRAM POWER

Type: 4'' HF driver	Voice Coil: 4'' CCAR
Throat Diameter: 2'' (50.8mm)	Diaphragm Material: Titanium
Nominal Impedance: 8Ω	Magnet: Neodymiun
Power Handling: 120W RMS	Back Cover: Die Cast
Sensitivity (1W/1m): 108dB	Mounting Screw: 4-M6- Ø102
Frequency Response: 500Hz-20KHz	

Specifications are subject to change without notice.



LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
83 x 39 x 83,5 mm 32,7 x 15,4 x 32,9 In	38,5 Kg / 84,9 Lb	48u

SDR 1000

COD. 5110255

50W PROGRAM POWER

- Type: 1'' HF driver
- Throat Diameter: 1'' (25.4mm)
- Nominal Impedance: 8Ω
- Power Handling: 25W RMS
- Sensitivity (1W/1m): 102dB
- Frequency Range: 1800Hz-20KHz
- Voice coil: 1'' CCAW
- Diaphragm Material: Polyamide
- Magnet: 11 Oz
- Recommended Crossover: 3.5k Hz
- Mounting Screw: 1-3/8'' -18TPI



LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
32 x 37,5 x 37,5 mm 12,6 x 14,8 x 14,8 In	9 Kg / 19,8 Lb	12u

SDR 1350

COD. 5110256

70W PROGRAM POWER

- Type: 1.35'' HF driver
- Throat Diameter: 1'' (25.4mm)
- Nominal Impedance: 8Ω
- Power Handling: 35W RMS
- Sensitivity (1W/1m): 104dB
- Frequency Response: 1500Hz-20KHz
- Voice Coil: 1.35'' CCAW
- Diaphragm Material: Titanium
- Magnet: 19.5 Oz
- Back Cover: Die Cast
- Mounting Screw: 1-3/8'' -18TPI



LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
20 x 33 x 33 mm 7,9 x 13 x 13 In	11,4 Kg / 25,1 Lb	8u

SDR 1750

COD. 5110257

100W PROGRAM POWER

- Type: 1.75'' HF driver
- Throat Diameter: 1'' (25.4mm)
- Nominal Impedance: 8Ω
- Power Handling: 50W RMS
- Sensitivity (1W/1m): 105dB
- Frequency Response: 1300Hz-20KHz
- Voice Coil: 1.75'' CCAW
- Diaphragm Material: Titanium
- Magnet: 25.5 Oz
- Back Cover: Die Cast
- Mounting Screw: 1-3/8'' -18TPI



LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
20 x 33 x 33 mm 7,9 x 13 x 13 In	24,5 Kg / 54 Lb	4u

SDR 2500

COD. 5110258

16W PROGRAM POWER

- Type: 2.5'' HF driver
- Throat Diameter: 1.4'' (35.5mm)
- Nominal Impedance: 8Ω
- Power Handling: 80W RMS
- Sensitivity (1W/1m): 106dB
- Frequency Response: 1000Hz-20KHz
- Voice coil: 2.5'' CCAW
- Diaphragm Material: Titanium
- Magnet: 53 Oz
- Back Cover: Die Cast
- Mounting Screw: 4-M6- Ø102

Specifications are subject to change without notice.

COMPONENTS WOOFERS



LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
52,5 x 39 x 27 mm 20,7 x 15,4 x 10,6 In	11,4 Kg / 25,1 Lb	1u

COD. **5800013**

WF 1015 — PROG POWER 300W

WOOFER 10"

RMS Power: 150W
Program Power: 300W
Impedance: 8Ω
Frequency Response: 50Hz - 50KHz
Sensitivity: 93,5dB
Magnet Weight: 40Oz
Voice Coil Diameter: 2"(50.8mm)
Thiele-Small parameters
Fs: 60Hz MMS: 42g
RE: 6Ω Vas: 31 Liters
QMS: 6,5
QES: 0,52
QTS: 0,48

KW-101
WF-1015 Replacement Kit
10" 8Ω - 150W - 2" Voice Coil



LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
23 x 21,5 x 21,5 mm 9,1 x 8,5 x 8,5 In	12,5 Kg / 27,6 Lb	12u

COD. **5110309**

WF 1220 — PROG POWER 400W

WOOFER 12"

RMS Power: 200W
Program Power: 400W
Impedance: 8Ω
Frequency Response: 40Hz - 40KHz
Sensitivity: 95dB
Magnet Weight: 50Oz
Voice Coil Diameter: 2.5" (60.6mm)
Thiele-Small parameters
Fs: 50Hz MMS: 52g
RE: 6Ω Vas: 69 Liters
QMS: 7,5
QES: 0,5
QTS: 0,48

KW-122
WF-1220 Replacement Kit
12" 8Ω - 200W - 2.5" Voice Coil



LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
16,5 x 27 x 27 mm 6,5 x 10,6 x 10,6 In	12,7 Kg / 28 Lb	8u

COD. **5110318**

WF 1525 — PROG POWER 500W

WOOFER 15"

RMS Power: 250W
Program Power: 500W
Impedance: 8Ω
Frequency Response: 30Hz - 35KHz
Sensitivity: 96.5dB
Magnet Weight: 50Oz
Voice Coil Diameter: 2.5" (60.6mm)
Thiele-Small parameters
Fs: 38Hz MMS: 85g
RE: 6Ω Vas: 185 Liters
QMS: 9,5
QES: 0,48
QTS: 0,46

KW-152
WF-1525 Replacement Kit
15" 8Ω - 250W - 2.5" Voice Coil



LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
60,5 x 39 x 27 mm 23,8 x 15,4 x 10,6 In	12,3 Kg / 27,1 Lb	1u

COD. **5800015**

WF 1830 — PROG POWER 700W

WOOFER 18"

RMS Power: 350W
Program Power: 700W
Impedance: 8Ω
Frequency Response: 20Hz - 25KHz
Sensitivity: 97dB
Magnet Weight: 65Oz
Voice Coil Diameter: 3" (75mm)
Thiele-Small parameters
Fs: 29 Hz MMS: 188g
RE: 6Ω Vas: 360 Liters
QMS: 4,5
QES: 0,32
QTS: 0,3

KW-183
WF-1830 Replacement Kit
18" 8Ω - 350W - 3" Voice Coil

Specifications are subject to change without notice.



LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
10,5 x 36,5 x 36,5 mm 4,1 x 14,4 x 14,4 In	16,5 Kg / 36,4 Lb	4u

COD. 5110340

TITANX 12350

PROG POWER 700W

WOOFER 12"

Nominal Impedance: 8Ω	
Frequency Response: 45Hz – 4KHz	
Power Handling RMS: 350W	
Sensitivity (1M/W) 97dB	
Voice Coil: 3" 2 layers API	
VC winding width: 16mm	
Magnet: 90Oz	
Frame: Die Cast	
Air Gap: 10mm	
Xmax: ±3mm	
Revc=6.000Ohm	Qes= 0.268
Levc=856.975uH	Qts= 0.259
Fo=54.438Hz	No= 3.517%
Sd=551.550cm	SPLo= 97.5dB
Md=60.000g	Vas=60.369Ltr Cms=139.750u
BL=21.650T	Mms=61.161g Mmd=53.713g
Qms= 8.171	



LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
37,5 x 37,5 x 12 mm 14,8 x 14,8 x 4,7 In	15 Kg / 33,1 Lb	4u

COD. 5110341

TITANX 15400

PROG POWER 800W

WOOFER 15"

Nominal Impedance: 8Ω	
Frequency Response: 40Hz – 3KHz	
Power Handling RMS: 400W	
Sensitivity (1M/W): 98dB	
Voice Coil: 3" 2 layers API	
VC winding width: 16mm	
Magnet: 90Oz	
Frame: Die Cast	
Air Gap: 10mm	
Xmax: ±3mm	
Revc=6.000Ohm Levc=854.969uH	Mms=94.079g Mmd=79.696g
Fo=41.537Hz Sd=855.300cm	
Md=95.000g	
BL=23.018T Qms=9.439	
Qes=0.278 Qts=0.270 No=4.040%	
SPLo=98.1dB	
Vas=162.108Ltr Cms=156.056u	



LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
60,5 x 32,5 x 22,5 mm 23,8 x 12,8 x 8,9 In	9 Kg / 19,8 Lb	1u

COD. 5110342

TITANX 18600

PROG POWER 1200W

SUBWOOFER 18"

Nominal Impedance: 8Ω	
Frequency Response: 30Hz – 1KHz	
Power Handling RMS: 600W	
Sensitivity (1M/W): 96dB	
Voice Coil: 4" 2 layers API	
VC winding width: 26mm	
Magnet: 125Oz	
Frame: Die Cast	
Air Gap: 12mm	
Xmax: ±7mm	
Revc=6.000Ohm Levc=1.383mH	Mms=211.958g Mmd=186.344g
Fo=38.538Hz Sd=1.257Kcm	
Md=220.000g	
BL=25.245T Qms=8.948	
Qes=0.483 Qts=0.458	
No=2.067% SPLo=95.2dB	
Vas=180.438Ltr Cms=80.467u	

Specifications are subject to change without notice.

SKP PRO AUDIO

CONNECTORS AND CABLES

SNAKE LINE / CABLES



24+8

MASTER DIMENSIONS 44x27x35mm | GROSS WEIGHT 17.5KG | MASTER PIECES 100U

SNAKE 248 1407529

24 MIC 4 RETURN 150FT SNAKE CABLE 8(24+4)/45M

Snake 24 in 8 out / 150ft



32+8

MASTER DIMENSIONS 44x27x35mm | GROSS WEIGHT 17.5KG | MASTER PIECES 100U

SNAKE 328 1407528

32 MIC 4 RETURN 150FT SNAKE CABLE 8 (32+4)/45M

Snake 32 in 8 out / 150ft



MASTER DIMENSIONS 44x27x35mm | GROSS WEIGHT 17.5KG | MASTER PIECES 100U

RT13 1407514

2x 6,5 mono - 3,5 stereo 2m

RCA to 1/8 stereo audio cable / 6ft



MASTER DIMENSIONS 44x27x35mm | GROSS WEIGHT 17.5KG | MASTER PIECES 100U

RT12 1407515

2x 6,5 mono - 3,5 stereo 1m

RCA to 1/8 stereo audio cable / 3ft

SOUND, KNOWLEDGE AND PASSION

WWW.SKPAUDIO.COM



COLOR AVAILABLE — TRANSPARENT

MASTER DIMENSIONS 44x27x35mm | GROSS WEIGHT 17.5KG | MASTER PIECES 100U

C13 00000000

Black Flat Hifi Speaker Cable PVC 4.2x8.4mm,16AWG 16GA, 2x1.3mm2, 300m/roll

Speaker cable 16 AWG / 500ft



MASTER DIMENSIONS 44x27x35mm | GROSS WEIGHT 17.5KG | MASTER PIECES 100U

C22 1407501

Black Instrument Cable PVC with fabric 6.5mm, 24AWG

Instrument cable fabric / 300ft



12-in-1 CABLE TESTER

Continuity check and intermittent contact detection.

COMPATIBLE CONNECTORS

MASTER DIMENSIONS 44x27x35mm | GROSS WEIGHT 17.5KG | MASTER PIECES 100U

CT 400 00000000

- XLR (3P, 5P)
- Speakon (8P, 4P)
- TRS (1/4", 1/8")
- RCA
- Banana connector
- DIN (3P, 5P, 7P, 8P)
- USB (Type A, Type B)
- RJ45



COLOR AVAILABLE

MASTER DIMENSIONS 44x27x35mm | GROSS WEIGHT 17.5KG | MASTER PIECES 100U

C19 00000000

Speaker cable PVC 10.5mm, 14AWG

Speaker cable(4 pole) 14 AWG / 300ft



COLOR AVAILABLE

MASTER DIMENSIONS 44x27x35mm | GROSS WEIGHT 17.5KG | MASTER PIECES 100U

C25 1407502

Black DMX cable PVC 7.0mm,22AWG

AES/EBU & DMX cable / 300ft



COLOR AVAILABLE

MASTER DIMENSIONS 44x27x35mm | GROSS WEIGHT 17.5KG | MASTER PIECES 100U

C28 1407503

Black Microphone cable PVC 7.0mm,22AWG

Cable / 300ft

Follow us on /SKPAUDIO

www.skpaudio.com

Specifications are subject to change without notice.

TT LINE / CABLES



MASTER DIMENSIONS 44x27x35mm | GROSS WEIGHT 17,5KG | MASTER PIECES 100U

TT10 1407538

SIGNAL CABLE CONNECTOR

TS to TS audio cable / 3ft

TT13 1407539

SIGNAL CABLE CONNECTOR

TS to TS audio cable / 20ft

TT16 1407540

SIGNAL CABLE CONNECTOR

TS to TS audio cable / 30ft



MASTER DIMENSIONS 44x27x35mm | GROSS WEIGHT 17,5KG | MASTER PIECES 100U

TT19 1407541

Premade Intrument Cable P10/P10,3m, black

TS to TS instrument cable / 10ft

TT22 1407542

Premade Intrument Cable P10/P10,3m, black

TS to TS instrument cable / 20ft



MASTER DIMENSIONS 44x27x35mm | GROSS WEIGHT 17,5KG | MASTER PIECES 100U

TT28 1407544

Premade Intrument Cable P10 90° /P10

TS to TS instrument cable / 10ft

TT31 1407545

Premade Intrument Cable P10 90° /P10

TS to TS instrument cable / 20ft

TT34 1407544

Premade Intrument Cable P10 90° /P10

TS to TS instrument cable / 30ft



MASTER DIMENSIONS 44x27x35mm | GROSS WEIGHT 17,5KG | MASTER PIECES 100U

TT25 1407543

Premade Intrument Cable P10 90° /P10 90° ,0.3m,black

TS 90 to TS 90 audio cable / 1ft



MASTER DIMENSIONS 44x27x35mm | GROSS WEIGHT 17,5KG | MASTER PIECES 100U

TT37 1407547

Audio connection cable 1P21 (stereo),0.9m

1/8 to 1/8 stereo audio cable / 3ft




MASTER DIMENSIONS 44x27x35mm | GROSS WEIGHT 17,5KG | MASTER PIECES 100U

TT40 1407548

Audio connection cable 2 P10/2 P10, 0.9m

TS to TS stereo audio cable / 3ft



MASTER DIMENSIONS 44x27x35mm | GROSS WEIGHT 17,5KG | MASTER PIECES 100U

TT43 1407549

2x 6,5 mono - 3,5 stereo 1m

TS to 1/8 stereo audio cable / 3ft



MASTER DIMENSIONS 44x27x35mm | GROSS WEIGHT 17,5KG | MASTER PIECES 100U

TT46 1407550

2x 6,5 mono - 3,5 stereo 2m

TS to 1/8 stereo audio cable / 6ft

RR LINE / CABLES



MASTER DIMENSIONS 44x27x35mm | GROSS WEIGHT 17,5KG | MASTER PIECES 100U

RR10 1407510

Audio connection cable 2RCA M/2 RCA M

RCA to RCA stereo audio cable / 3ft

RR11 1407511

Audio connection cable 2RCA M/2 RCA M

RCA to RCA stereo audio cable / 6ft

RR12 1407512

Audio connection cable 2RCA M/2 RCA M

RCA to RCA stereo audio cable / 10ft



MASTER DIMENSIONS 44x27x35mm | GROSS WEIGHT 17,5KG | MASTER PIECES 100U

RT10 1407513

Audio connection cable 2RCA M/2 P10, 1m

RCA to TS stereo audio cable / 3ft

RT11 1407514

Audio connection cable 2RCA M/2 P10, 2m

RCA to TS stereo audio cable / 6ft

SS LINE / CABLES



MASTER DIMENSIONS 44x27x35mm | GROSS WEIGHT 17,5KG | MASTER PIECES 100U

SS10 1407530

SPEAKON - SPEAKON 16GA 30FT CABLE 16GA, OD6mm, 2x1.3mm2

Speakon to Speakon 16 AWG / 30ft



MASTER DIMENSIONS 44x27x35mm | GROSS WEIGHT 17,5KG | MASTER PIECES 100U

SS13 1407531

SPEAKON - SPEAKON 14GA 50FT CABLE 14GA, OD7.5mm, 2x2.0mm2

Speakon to Speakon 14 AWG / 50ft

ST LINE / CABLES



MASTER DIMENSIONS 44x27x35mm | GROSS WEIGHT 17,5KG | MASTER PIECES 100U

ST10 1407532

PLUG 1/4" - SPEAKON 16GA 30FT CABLE 16GA, OD6mm, 2x1.3mm2

Speakon to TS 16 AWG / 30ft



MASTER DIMENSIONS 44x27x35mm | GROSS WEIGHT 17,5KG | MASTER PIECES 100U

ST13 1407533

PLUG 1/4" - SPEAKON 14GA 50FT CABLE 14GA, OD7.5mm, 2x2.0mm2

Speakon to TS 14 AWG / 50ft

XX XT LINE / CABLES



MASTER DIMENSIONS 44x27x35mm | GROSS WEIGHT 17,5KG | MASTER PIECES 100U

XX03 1407558

SIGNAL CABLE CONNECTOR 0.9m

XLR to XLR audio cable / 3ft

XX20 1407559

SIGNAL CABLE CONNECTOR 6m

XLR to XLR audio cable / 20ft

XX30 1407560

SIGNAL CABLE CONNECTOR 9m

XLR to XLR audio cable / 30ft



MASTER DIMENSIONS 44x27x35mm | GROSS WEIGHT 17,5KG | MASTER PIECES 100U

XT20 1407557

SIGNAL CABLE CONNECTOR 6m

XLR to TS audio cable / 20ft



COLOR AVAILABLE — TRANSPARENT

MASTER DIMENSIONS 44x27x35mm | GROSS WEIGHT 17,5KG | MASTER PIECES 100U

C10 00000000

Black Flat Hifi Speaker Cable PVC 4.6x9.2mm,14AWG 14GA, 2x2.0mm2, 100m/roll

Speaker cable 14 AWG / 300ft

C LINE / CABLES



COLOR AVAILABLE — TRANSPARENT

MASTER DIMENSIONS 44x27x35mm | GROSS WEIGHT 17,5KG | MASTER PIECES 100U

C16 00000000

Black Flat Hifi Speaker Cable PVC 3.5x7mm 18GA, 2x0.75mm2, 300m/roll

Speaker cable 18 AWG / 1000ft

SKP PRO AUDIO

CONNECTORS & CABLES

SOUND, KNOWLEDGE AND PASSION

WWW.SKPAUDIO.COM





MASTER DIMENSIONS 44x27x35mm | GROSS WEIGHT 17,5KG | MASTER PIECES 1000

X16 1407553

XLR female x4

XLR Female 90

X4

MASTER DIMENSIONS 44x27x35mm | GROSS WEIGHT 17,5KG | MASTER PIECES 1000

X19 1407554

XLR male x4

XLR Male 90

X4





MASTER DIMENSIONS 44x27x35mm | GROSS WEIGHT 17,5KG | MASTER PIECES 1000

X22 1407555

3 PIN FEMALE XLR PROFESSIONAL CONNECTOR x6

XLR Female x6 / Black

MASTER DIMENSIONS 44x27x35mm | GROSS WEIGHT 17,5KG | MASTER PIECES 1000

X25 1407556

3 PIN MALE XLR PROFESSIONAL CONNECTOR x6

XLR Male x6 / Black

R LINE / RCA





MASTER DIMENSIONS 44x27x35mm | GROSS WEIGHT 17,5KG | MASTER PIECES 1000

R10 1407508

PROFESSIONAL RCA PLUG CONNECTOR x4

RCA Male x4

X4

MASTER DIMENSIONS 44x27x35mm | GROSS WEIGHT 17,5KG | MASTER PIECES 1000

R11 1407509

PROFESSIONAL RCA PLUG CONNECTOR x4

RCA Female x4

X4





MASTER DIMENSIONS 44x27x35mm | GROSS WEIGHT 17,5KG | MASTER PIECES 1000

S10 1407517

4-POLE RECTANGULAR PANEL MOUNT SPEAKON CONNECTOR x4

Speakon 4 pole cable

X2

MASTER DIMENSIONS 44x27x35mm | GROSS WEIGHT 17,5KG | MASTER PIECES 1000

S13 1407518

4 Pole 90° speaker connector x2

Speakon 4 pole cable / 90



MASTER DIMENSIONS 44x27x35mm | GROSS WEIGHT 17,5KG | MASTER PIECES 1000

S22 1407521

4 Pole speaker connector x2

Speakon 4 pole cable / Male

X2



MASTER DIMENSIONS 44x27x35mm | GROSS WEIGHT 17,5KG | MASTER PIECES 1000

S25 1407522

4 POLE receptacle SPEAKON CONNECTOR x4

Speakon 4 pole chasis / Male

X4



MASTER DIMENSIONS 44x27x35mm | GROSS WEIGHT 17,5KG | MASTER PIECES 1000

S28 1407523

8 Pole receptacle speaker connector x2

Speakon 8 pole chasis / Male

S LINE / SPEAKON





MASTER DIMENSIONS 44x27x35mm | GROSS WEIGHT 17,5KG | MASTER PIECES 1000

S16 1407519

8 Pole speaker connector

Speakon 8 pole cable

MASTER DIMENSIONS 44x27x35mm | GROSS WEIGHT 17,5KG | MASTER PIECES 1000

S19 1407520

Adapter 4 pole speaker male connector to 4 pole speaker male connector x1

Speakon adapter / Male to Male



MASTER DIMENSIONS 44x27x35mm | GROSS WEIGHT 17,5KG | MASTER PIECES 1000

S31 1407524

3 Pole AC Power cable mount connector(power in-blue/power out-grey)

Powercon IN + OUT cable



MASTER DIMENSIONS 44x27x35mm | GROSS WEIGHT 17,5KG | MASTER PIECES 1000

S37 1407526

Powercon IN cable **WATERPROOF**

Powercon TRUE1 IN + OUT cable



MASTER DIMENSIONS 44x27x35mm | GROSS WEIGHT 17,5KG | MASTER PIECES 1000

S34 1407525

powercon IN chasis (power in-blue/power out-grey)

Powercon IN + OUT chasis



MASTER DIMENSIONS 44x27x35mm | GROSS WEIGHT 17,5KG | MASTER PIECES 1000

S40 1407527

Powercon IN chasis WaterProof

Powercon TRUE1 IN + OUT chasis


X4

X LINE / XLR CONNECTOS



COLOR AVAILABLE x6





MASTER DIMENSIONS 44x27x35mm | GROSS WEIGHT 17,5KG | MASTER PIECES 100U


X28 00000000

- 3 PIN FEMALE XLR PROFESSIONAL CONNECTOR x6
- Gold contacts
- Broad colors rings



COLOR AVAILABLE x6





MASTER DIMENSIONS 44x27x35mm | GROSS WEIGHT 17,5KG | MASTER PIECES 100U

X31 00000000

- 3 PIN MALE XLR PROFESSIONAL CONNECTOR x6
- Gold contacts
- Broad colors rings

D LINE / ADAPTERS



MASTER DIMENSIONS 44x27x35mm | GROSS WEIGHT 17,5KG | MASTER PIECES 100U

D10 1407504

- "D" shape black aluminum-alloy with audio transformer x2
- XLR Female to TS adapter with audio transformer



MASTER DIMENSIONS 44x27x35mm | GROSS WEIGHT 17,5KG | MASTER PIECES 100U

D11 1407505

- "D" shape black aluminum-alloy with audio transformer x2
- XLR Male to TS adapter with audio transformer



COLOR AVAILABLE




MASTER DIMENSIONS 44x27x35mm | GROSS WEIGHT 17,5KG | MASTER PIECES 100U

X10 1407551

- XLR female x6 (red/orange/blue/green/yellow/black)
- XLR Female x6 / Color



COLOR AVAILABLE




MASTER DIMENSIONS 44x27x35mm | GROSS WEIGHT 17,5KG | MASTER PIECES 100U

X13 1407552

- XLR male x6 (red/orange/blue/green/yellow/black)
- XLR Male x6 / Color

T LINE / PLUGS

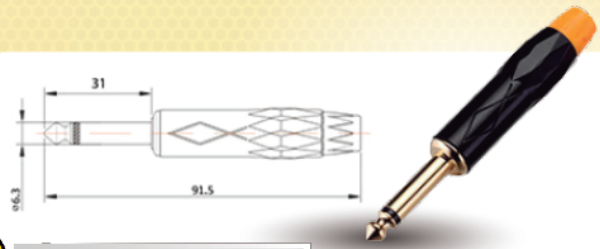

X2 X2



MASTER DIMENSIONS 44x27x35mm | GROSS WEIGHT 17,5KG | MASTER PIECES 100U

T22 00000000

- 1/4 INCH MONO MALE JACK x4
- GOLD RING



MASTER DIMENSIONS 44x27x35mm | GROSS WEIGHT 17,5KG | MASTER PIECES 100U

T10 1407534

- 1/4 INCH MONO MALE JACK x6
- TS x6

X6



MASTER DIMENSIONS 44x27x35mm | GROSS WEIGHT 17,5KG | MASTER PIECES 100U

T16 1407536

- 1/4 Inch mono jack x2 RED x4 BLACK
- TS x4

X2 X2



MASTER DIMENSIONS 44x27x35mm | GROSS WEIGHT 17,5KG | MASTER PIECES 100U

T13 1407535

- 1/4 INCH STEREO MALE JACK x6
- TRS x6

X6




MASTER DIMENSIONS 44x27x35mm | GROSS WEIGHT 17,5KG | MASTER PIECES 100U

T19 1407537

- 1/4 Inch mono jack x4
- TRS x4

X2 X2

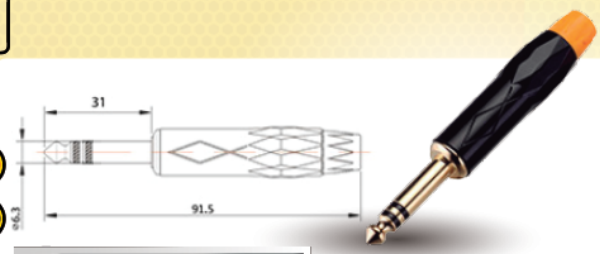

X2 X2



MASTER DIMENSIONS 44x27x35mm | GROSS WEIGHT 17,5KG | MASTER PIECES 100U

T25 00000000

- 1/4 INCH STEREO MALE JACK x4
- GOLD RING

N LINE / RJ45



MASTER DIMENSIONS 44x27x35mm | GROSS WEIGHT 17,5KG | MASTER PIECES 100U

N10 1407506

- RJ45 cable
- RJ45 Chasis




MASTER DIMENSIONS 44x27x35mm | GROSS WEIGHT 17,5KG | MASTER PIECES 100U

N11 1407507

- RJ45 connector shell
- RJ45 Cable

SUPPORTS STANDS

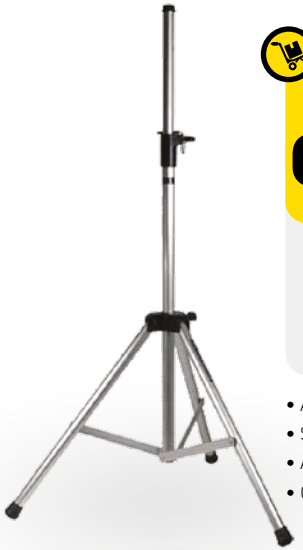

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
36 x 31 x 102 mm 14,2 x 12,2 x 40,2 In	17,4 Kg / 38,4 Lb	4u

STD 2

COD. 3300202

SPEAKER STAND

Max height	2,00m
Load Capacity	70kg
Moving Tube O.D	35mm
Center Tube O.D	40mm
Weight	2,6kg

- Aluminium speaker stand supplied with a lock clamp system
- Steel security pin
- Air-Cushion safety release to allow maximum flexibility
- Quick and easy operation of portability



LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
310x265x995mm 12x10x39in	14,5Kg / 32Lb	4u

STD 3

COD. 3300329

SPEAKER STAND

Height adjustment	43"-74" / 1100-1870mm
Load capacity	132lb / 60kg
Weight	7.6lb / 3.45kg
Upper shaft tubing	1.38" / 35mm
Color	Black
Material	Steel

- Maximum stability
- Adjustable height - Locking mechanism
- Slip-resistant feet
- Heavy Duty Steel Construction



LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
300x270x995mm 12x11x39in	14Kg / 31Lb	4u

STD 4S

COD. 3300330

SPEAKER STAND (SET OF 2)

Height adjustment	43"-74" / 1100-1870mm
Load capacity	132lb / 60kg
Weight	6.6lb / 3kg
Upper shaft tubing	1.38" / 35mm
Color	Black
Material	Steel

- Included carrying case
- Easy to carry
- Strong and durable steel construction



LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
680x450x300mm 27x18x12in	13,1Kg / 29Lb	10u

STD 5

COD. 3300334

WALL MOUNT SPEAKER STAND

Angle adjustment	45-90°
Load capacity	66lb / 30kg
Weight	5.5lb / 2.5kg
Color	Black
Material	Steel

- Multi angle adjustability
- Strongest steel construction
- High load capacity

Specifications are subject to change without notice.



LOGISTICS INFORMATION


MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
600x850x820mm 24x33x32in	16,5Kg / 36,4Lb	4u

SMS 1 — COD. 3300328

STUDIO MONITOR STAND

Height adjustment	27"-51" / 690-1300mm
Plate size	9"-9" / 230-230mm
Base(W*D)	18"*18"*18" / 450*450*450mm
Load capacity	132lb / 60kg
Weight	8.4lb / 3.8kg
Upper shaft tubing	1.4" / 35m
Color	Black
Material	Steel

- Wide surface - Ready for all monitors
- Broader base - more stability
- Heavy Duty Steel Construction
- Easy and quick to set up

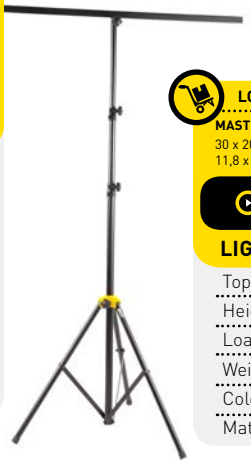

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
30 x 20 x 82 mm 11,8 x 7,9 x 32,3 In	11,6 Kg / 25,6 Lb	6u

LS 1 — COD. 3300325

LIGHTING STAND

Top T-Bar arm	47" / 1200mm
Height adjustment	43"-110" / 1100-2800mm
Load capacity	30kg
Weight	3.0kg
Color	Black
Material	Steel

- Adjustable height - 43" to 110"
- Heavy Duty Steel Construction
- Easy and quick to set up



LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
30 x 20 x 82 mm 11,8 x 7,9 x 32,3 In	11,6 Kg / 25,6 Lb	6u

DT 1 — COD. 3300324

DRUM THRONE

Height adjustment	20.5" / 520mm
Weight	5lb / 2.3kg
Color	Black
Material	Steel

- Maximum stability
- Adjustable height - Locking mechanism
- Slip-resistant feet
- Heavy Duty Steel Construction



LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
30 x 20 x 82 mm 11,8 x 7,9 x 32,3 In	11,6 Kg / 25,6 Lb	6u

LS 2 — COD. 3300204

LIGHTING STAND

Top T-Bar arm length	47" / 1200mm
Lower arms length	23" / 580mm
Height adjustment	57"-138" / 1450-3500mm
Load capacity	110,2lb / 50kg
Weight	15,2lb / 6.9kg
Color	Black
Material	Steel

- Adjustable height - 57" to 138"
- Heavy Duty Steel Construction
- Easy and quick to set up



LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
30 x 20 x 82 mm 11,8 x 7,9 x 32,3 In	11,6 Kg / 25,6 Lb	6u

LS 3 — COD. 3300327

ON-STAGE LIGHTING TRUSS STAND SYSTEM

Truss length	118" / 3000mm
Top T-Bar arm length	47" / 1200mm
Height adjustment	71"-138" / 1800-3500mm
Load capacity	220lb / 100kg
Weight	44lb / 20kg
Color	Black
Material	Steel

- Maximum weight capacity: 220lbs. (100kg)
- Truss system - All covered stage
- Adjustable height - 71" to 138"
- Heavy Duty Steel Construction




LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
30 x 20 x 82 mm 11,8 x 7,9 x 32,3 In	11,6 Kg / 25,6 Lb	6u

COD. 3300204

SP 20 — MICROPHONE STAND

- Boom Microphone Stand
- Black powder coated steel
- Rubber feet for excellent stability
- Boom arm with adjustable length and tilt angle

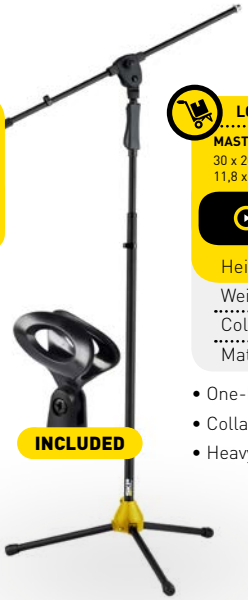

INCLUDED

LOGISTICS INFORMATION


MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
30 x 20 x 82 mm 11,8 x 7,9 x 32,3 In	11,6 Kg / 25,6 Lb	6u

COD. 3300321

SP 3 — MICROPHONE STAND

Height adjustment	41"-65" / 1030-1640mm
Weight	5,3lb / 2.4kg
Color	Black
Material	Plastic and Steel

- One-hand adjustable height
- Collapsible Tripod Base
- Heavy Duty Steel Construction

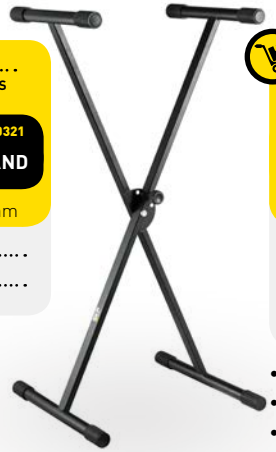

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
30 x 20 x 82 mm 11,8 x 7,9 x 32,3 In	11,6 Kg / 25,6 Lb	6u

COD. 3300323

KS 1 — KEYBOARD STAND

Height adjustment	25"-38,6" / 640-980mm
Load capacity	121,3lb / 55kg
Weight	5,5lb / 2.5kg
Color	Black
Material	Steel

- X-style keyboard stand
- Maximum stability
- Ajustable stand - Locking mechanism
- Easy and quick to set up
- Heavy Duty Steel Construction



INCLUDED

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
420x380x450mm 17x15x18in	21Kg / 46,2Lb	10u

COD. 3300322

SP 4 — MICROPHONE STAND

Height adjustment	16"-22" / 400-570mm
Weight	5,8lb / 2.65kg
Color	Black
Material	Steel

- Drum/Guitar Amp/Radio Mic Stand
- Solid base for maximum stability
- Heavy Duty Steel Construction



LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
41 x 58 x 48 mm 16,1 x 22,8 x 18,9 In	29,6 Kg / 65,3 Lb	15u

COD. 3300304

ST 2 — MICROPHONE STAND

Cable: Audio, protected, balanced (XLR - XLR),
6mm diameter x 4 mm
Material of Tripod: Metal
Net weight: 1.6kg
Bearing Weight: ≥1kg



LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
682x475x355 mm 24.4 x 47.5 x 14 inch	30.5 kg / 67.24 lb	5u

COD. 3300306

GWS I — GUITAR STAND

Wall-mount guitar hanger with self-locking system



LOGISTICS INFORMATION


MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
30 x 20 x 82 mm 11,8 x 7,9 x 32,3 In	11,6 Kg / 25,6 Lb	6u

COD. 3300331

GS 1 — A-FRAME GUITAR STAND

Height adjustment	16.5" / 420mm
Width	8.3"-13.5" / 210-345mm
Weight	3.3lb / 1.5kg
Color	Black
Material	Steel

- Folding and compact stand
- Heavy Duty Steel Construction
- Rubber finishes - More instrument protection

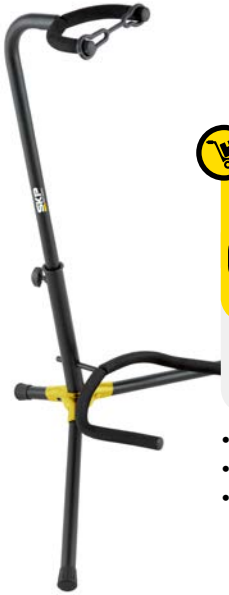

LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
30 x 20 x 82 mm 11,8 x 7,9 x 32,3 In	11,6 Kg / 25,6 Lb	6u

COD. 3300332

GS 2 — GUITAR STAND

Height adjustment	24.8"-29" / 630-740mm
Weight	2.2lb / 1kg
Color	Black
Material	Steel

- Tubular rugged stand
- Rubber finishes - More instrument protection
- Heavy Duty Steel Construction



LOGISTICS INFORMATION

MASTER DIMENSIONS	GROSS WEIGHT	MASTER PIECES
450x290x610mm 18x11x24in	11,2Kg / 24,7Lb	6u

COD. 3300333

GS 3 — DOUBLE GUITAR STAND

Height adjustment	14" / 360mm
Weight	2.2lb / 1kg
Color	Black
Material	Steel

- Tubular rugged stand
- Rubber finishes - More instrument protection
- Heavy Duty Steel Construction

SKP
PRO AUDIO


SOUND ENGINEERING
PREMIUM
100%
SKP
PRO AUDIO
QUALITY
SKP
PRO AUDIO